


2A SURFACE MOUNT FAST RECOVERY RECTIFIER

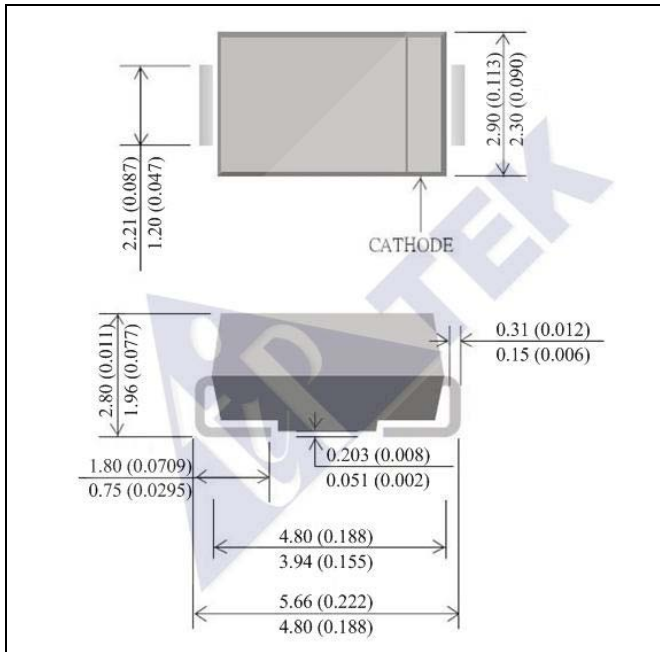

CASE : DO-214AC(SMA)

DIMENSIONS IN MILLIMETERS AND (INCHES)

FEATURES

- FOR SURFACE MOUNTED APPLICATIONS
- LOW PROFILE PACKAGE
- BUILT-IN STRAIN RELIEF
- EASY PICK AND PLACE
- PLASTIC MATERIAL USED CARRIES UNDERWRITERS LABORATORY CLASSIFICATION 94 V-0
- FAST SWITCHING
- HIGH TEMPERATURE SOLDERING : 250°C/10 SECONDS AT TERMINALS

MECHANICAL DATA

- CASE : MOLDED PLASTIC
- TERMINALS : SOLDER PLATED
- POLARITY : INDICATED BY CATHODE BAND
- WEIGHT : 0.064 GRAMS
- Pb Free: RS2AA~RS2MA
Halogen Free: RS2AA-H~RS2MA-H

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED.

PARAMETER	SYMBOL	RS2AA	RS2BA	RS2DA	RS2GA	RS2JA	RS2KA	RS2MA	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT .375" (9.5mm) LEAD LENGTH AT $T_A=90^\circ\text{C}$	I_O	2.0							A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	50							A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JA}$	20							°C/W
STORAGE TEMPERATURE RANGE	T_{STG}	-65 TO + 150							°C
OPERATING TEMPERATURE RANGE	T_J	-65 TO + 150							°C

ELECTRICAL CHARACTERISTICS (AT $T_A=25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

PARAMETER	SYMBOL	RS2AA	RS2BA	RS2DA	RS2GA	RS2JA	RS2KA	RS2MA	UNITS
MAXIMUM FORWARD VOLTAGE AT 2A	V_F	1.3							V
MAXIMUM DC REVERSE CURRENT	I_R	5							μA
		100							
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_J	50							pF
MAXIMUM REVERSE RECOVERY TIME(NOTE 3)	t_{rr}	150			250		500		nS

- NOTE: 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
 2. THERMAL RESISTANCE FROM JUNCTION TO AMBIENT AND FROM JUNCTION TO LEAD MOUNTED ON P.C.B WITH 0.2x0.2"(5.0x5.0mm) COPPER PAD AREAS.
 3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

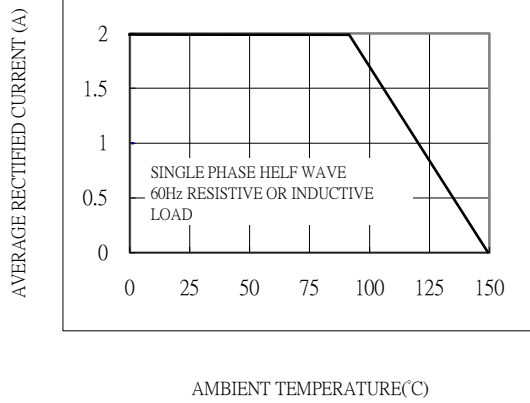


Fig.1-MAXIMUM CURRENT DERATING CURVE

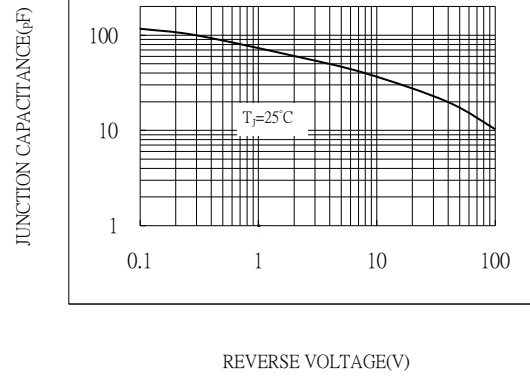


Fig.2-TYPICAL JUNCTION CAPACITANCE

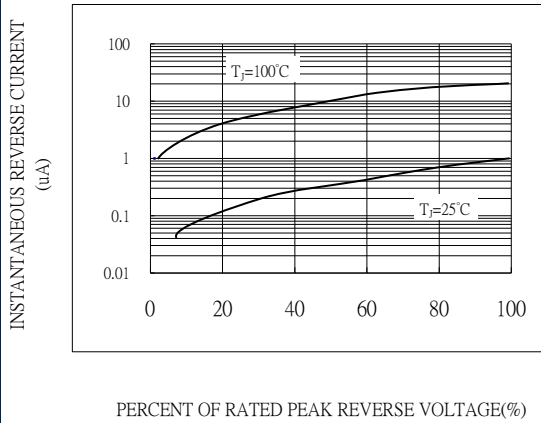


Fig.3-TYPICAL REVERSE CHARACTERISTICS

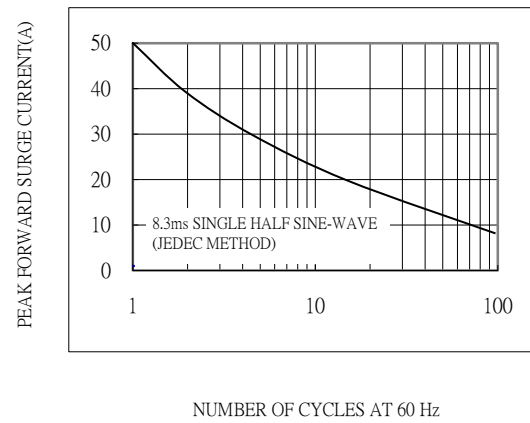


Fig.4-MAXIMUM FORWARD SURGE CURRENT

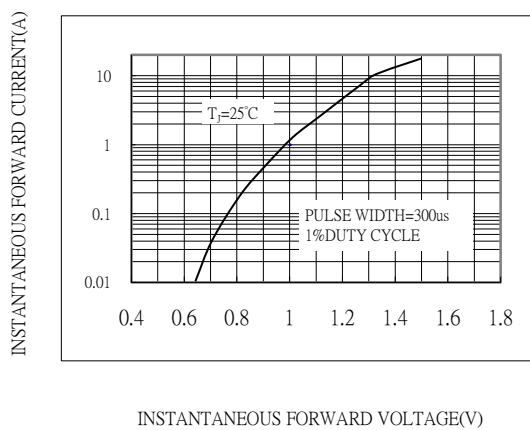


Fig.5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

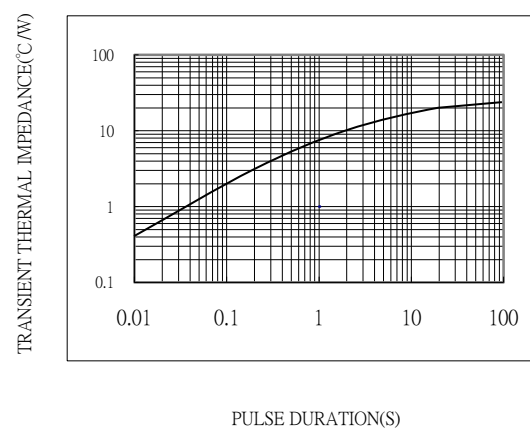


Fig.6-TYPICAL TRANSIENT THERMAL IMPEDANCE