


SINGLE-PHASE BRIDGE RECTIFIER
VOLTAGE RANGE 50 to 1000 Volts
CURRENT 4.0 Ampere

FEATURES

- * Low cost
- * High forward surge current capability
- * Ideal for printed circuit board
- * High temperature soldering guaranteed:
 260°C/10 second at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- * Case: Transfer molded plastic
- * Epoxy: UL94V-O rate flame retardant
- * Terminals : Lead Solderable Per MIL-STD-202E method 208C
- * Polarity : As Marking on Body
- * Mounting Position: Any
- * Weight : 0.22 ounce, 6.21 gram

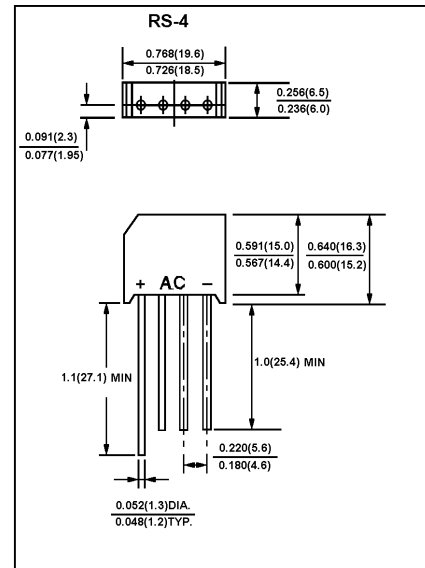

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- * Rating at 25 ambient temperature unless otherwise specified
- * Single phase, half wave. 60Hz, resistive or inductive load.
- * For capacitive load derate current by 20 %

Characteristic		Symbol	RS401	RS402	RS403	RS404	RS405	RS406	RS407	Unit
Peak Repetitive Reverse Voltage		V_{RRM}								V
Working Peak Reverse Voltage		V_{RWM}	50	100	200	400	600	800	1000	V
DC Blocking Voltage		V_R								V
RMS Reverse Voltage		$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Forward Rectified Output Current , at	$T_C=50$ (Note 2)	$I_{O(AV)}$	4.0							A
	$T_A=50$ (Note 3)		3.0							
Non-Repetitive Peak Surge Current 8.3 ms Single half sine-wave superimposed on rated load (JEDEC Method)		I_{FSM}	150							A
Forward Voltage (per element) ($I_F = 4.0$ Amp)		V_{FM}	1.0							V
Maximum DC reverse current at rated DC blocking voltage per element	$T_A = 25$	I_R	10							uA
	$T_A = 100$		1.0							mA
Rating for Fusing($t < 8.3$ ms)		I^2t	93							A ² s
Typical Junction Capacitance per element (Note1)		C_J	55							pF
Typical Thermal Resistance (note 3)		$R_{\theta JA}$	20							k/W
Operating and Storage Temperature Range		T_J, T_{stg}	-65 to +150							

- Note: 1 Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
 2. Unit mounted on 3.0"×3.0"×0.11" thick (7.5×7.5×0.3 cm) AL, plate.
 3. P.C. board mount with 0.5"×0.5" (12×12mm) copper pad. 0.375"(9.5 mm)lead length.

RS401 thru RS407

FIG-1 FORWARD CURRENT DERATING CURVE

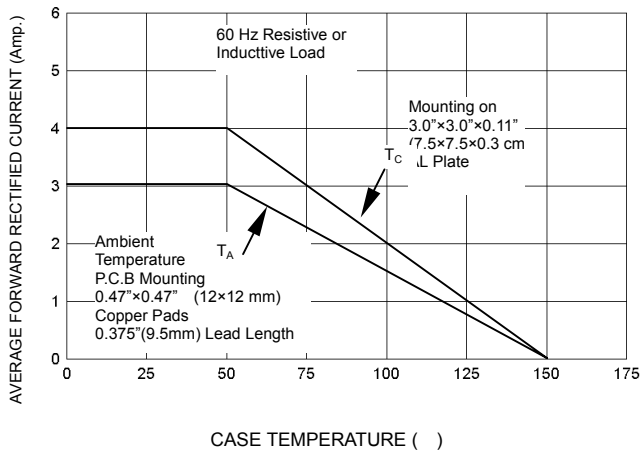


FIG-2 TYPICAL FORWARD CHARACTERISTICS

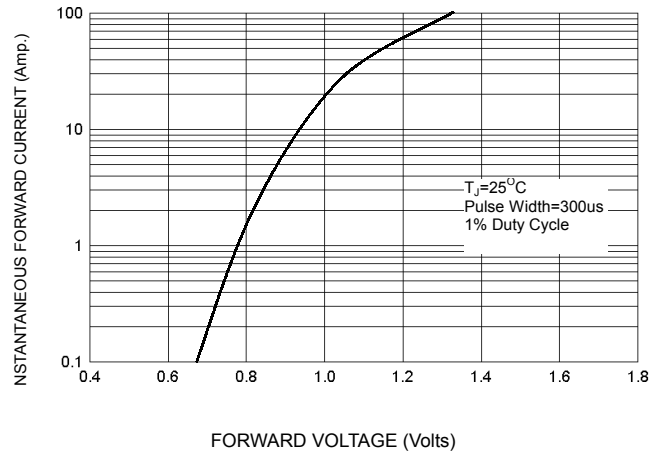


FIG-3 PEAK FORWARD SURGE CURRENT

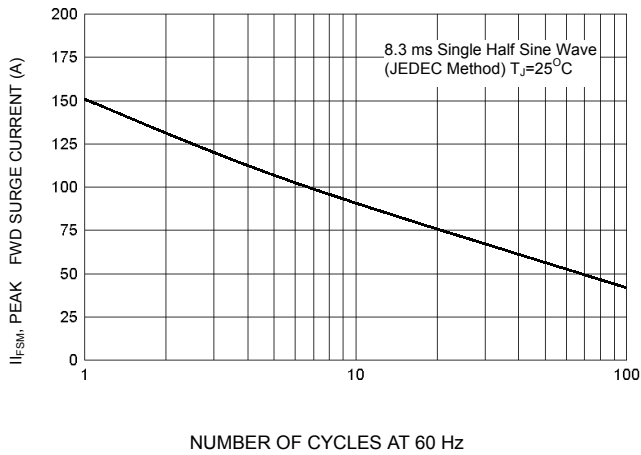


FIG-4 TYPICAL JUNCTION CAPACITANCE

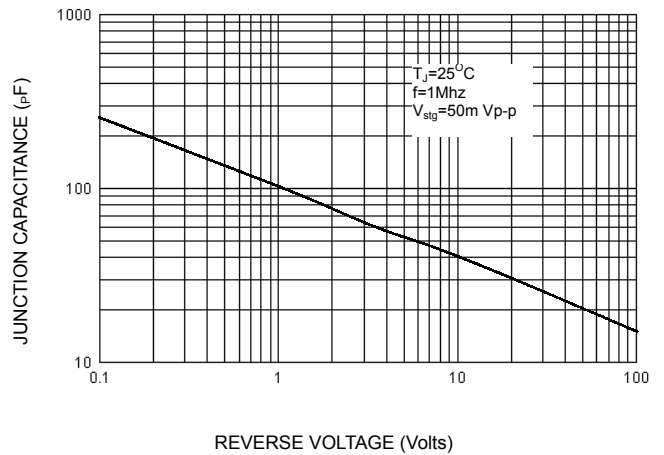


FIG-5 TYPICAL REVERSE CHARACTERISTICS

