



### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Fast switching speed

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.21 grams


### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

5.0 Ampere

#### DO-214AB(SMC)

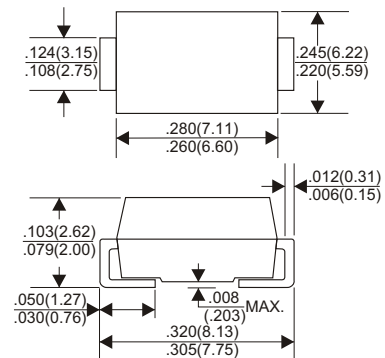

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER                                                                                           | RS5A       | RS5B | RS5D | RS5G | RS5J | RS5K | RS5M | UNITS |
|-------------------------------------------------------------------------------------------------------|------------|------|------|------|------|------|------|-------|
| Maximum Recurrent Peak Reverse Voltage                                                                | 50         | 100  | 200  | 400  | 600  | 800  | 1000 | V     |
| Maximum RMS Voltage                                                                                   | 35         | 70   | 140  | 280  | 420  | 560  | 700  | V     |
| Maximum DC Blocking Voltage                                                                           | 50         | 100  | 200  | 400  | 600  | 800  | 1000 | V     |
| Maximum Average Forward Rectified Current<br>at Ta=75°C                                               | 5.0        |      |      |      |      |      |      | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 150        |      |      |      |      |      |      | A     |
| Maximum Instantaneous Forward Voltage at 5.0A                                                         | 1.3        |      |      |      |      |      |      | V     |
| Maximum DC Reverse Current Ta=25°C                                                                    | 5.0        |      |      |      |      |      |      | A     |
| at Rated DC Blocking Voltage Ta=125°C                                                                 | 350        |      |      |      |      |      |      | A     |
| Maximum Reverse Recovery Time (Note 1)                                                                | 150        |      |      |      | 250  | 500  |      | nS    |
| Typical Junction Capacitance (Note 2)                                                                 | 70         |      |      |      |      |      |      | pF    |
| Operating and Storage Temperature Range Tj, Tstg                                                      | -65 — +150 |      |      |      |      |      |      | °C    |

#### NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## RATING AND CHARACTERISTIC CURVES (RS5A THRU RS5M)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

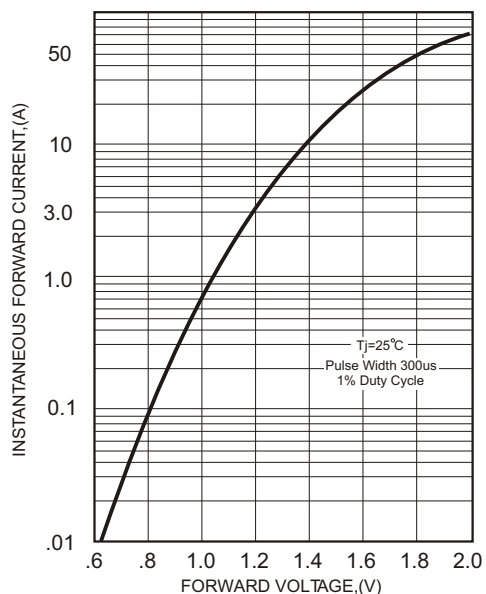


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


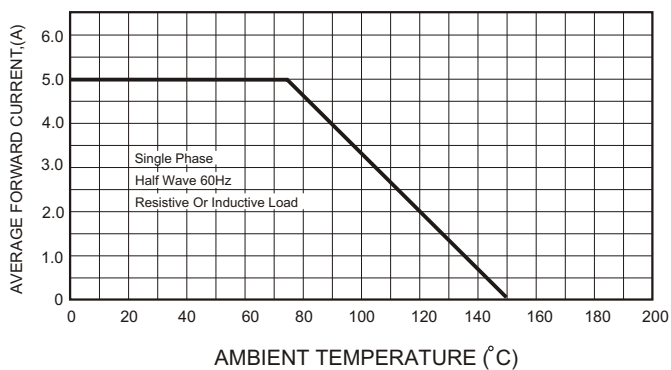


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

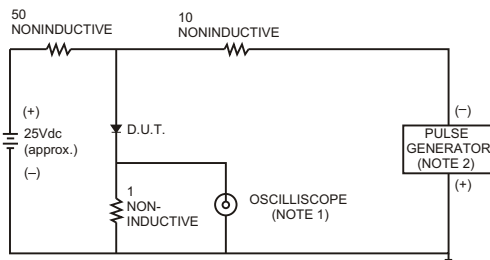

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.

2. Rise Time= 10ns max., Source Impedance= 50 ohms.

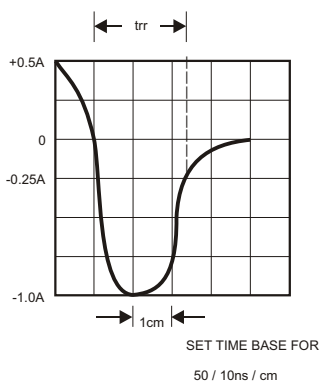


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

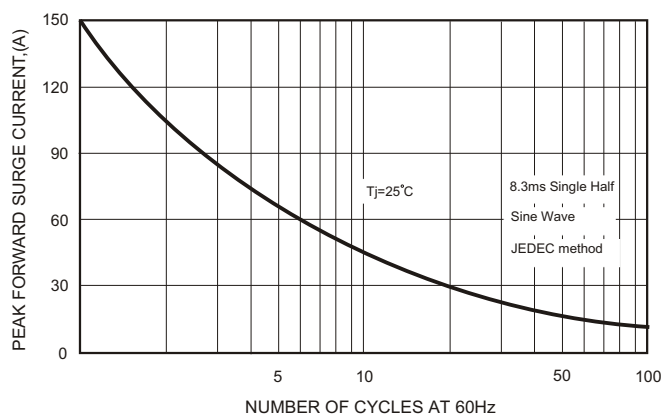


FIG.5-TYPICAL JUNCTION CAPACITANCE

