



RS5A-RS5M

Surface Mount Rectifiers

REVERSE VOLTAGE: 50 --- 1000 V

CURRENT: 5.0 A

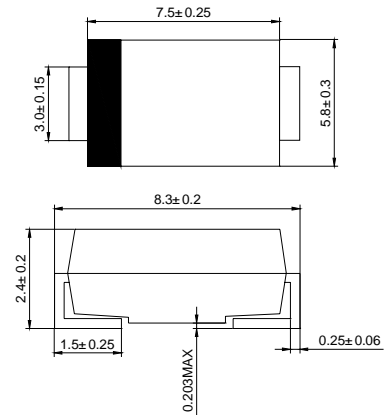
Features

- ◇ Plastic package has underwriters laborator flammability classification 94V-0
- ◇ For surface mounted applications
- ◇ Low profile package
- ◇ Built-in strain relief, ideal for automated placement
- ◇ Glass passivated chip junction
- ◇ High temperature soldering: 250°C/10 seconds at terminals

Mechanical Data

- ◇ Case: JEDEC DO-214AB, molded plastic over passivated chip
- ◇ Polarity: color band denotes cathode end
- ◇ Weight: 0.007 ounces, 0.21 gram

DO - 214AB(SMC)



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

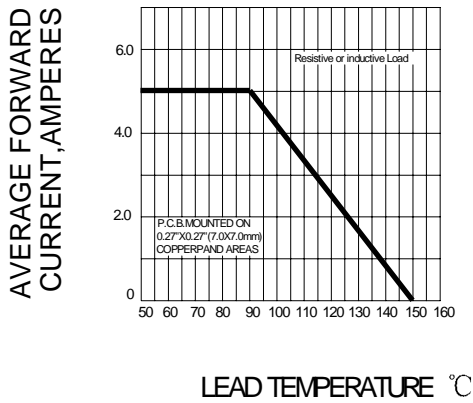
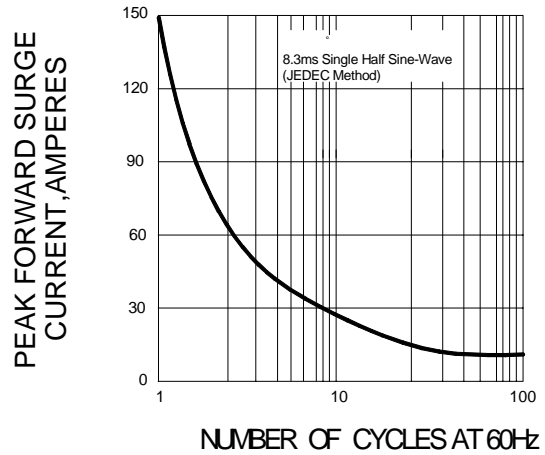
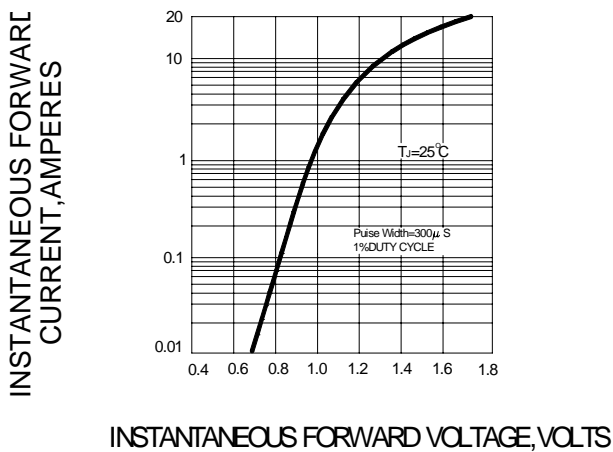
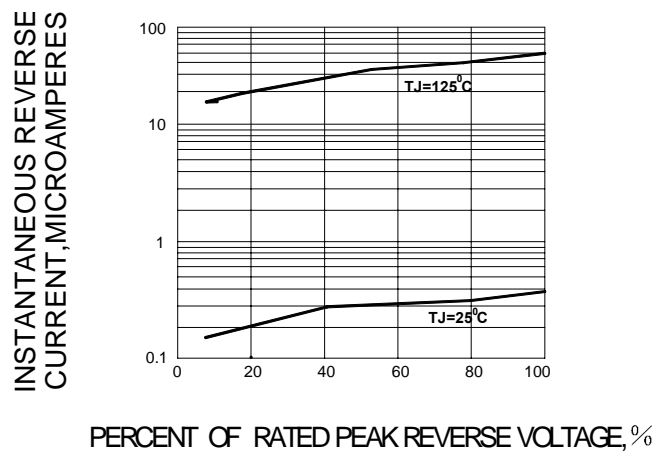
		RS5A	RS5B	RS5D	RS5G	RS5J	RS5K	RS5M	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_L=90^\circ\text{C}$	$I_{F(AV)}$	5.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	150							A
Maximum instantaneous forward voltage at 5.0A	V_F	1.3							V
Maximum DC reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$	I_R	5.0 200							μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	150				250	500		ns
Typical junction capacitance (NOTE 2)	C_J	32							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	22							$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J T_{STG}$	-55-----+150							$^\circ\text{C}$

NOTE: 1.Reverse recovery time test conditions: $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and junction to lead P.C.B.mounted on 0.2"X0.2"(5.0X5.0mm²) copper pad areas

Ratings AND Characteristic Curves

FIG.1 -- FORWARD DERATING CURVE

FIG.2 PEAK FORWARD SURGE CURRENT

FIG.3 -- TYPICAL FORWARD CHARACTERISTICS

FIG.4 -- TYPICAL REVERSE CHARACTERISTICS

FIG.5-TYPICAL JUNCTION CAPACITANCE
