


## RS801 THRU RS807

**FMS**

## SINGLE PHASE 8.0 AMP BRIDGE RECTIFIERS



## FEATURES


- \* Ideal for printed circuit board
- \* Low forward voltage
- \* Low leakage current
- \* Polarity: marked on body
- \* Mounting position: Any

## VOLTAGE RANGE

## 50 to 1000 Volts

## CURRENT

8.0 Amperes

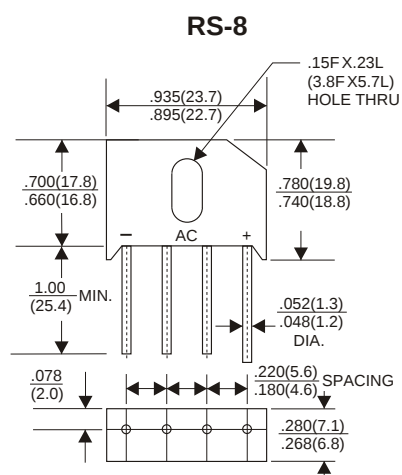

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

[illegible]

RATING AND CHARACTERISTIC CURVES (RS801 THRU RS807)

FIG.1-TYPICAL FORWARD CURRENT  
DERATING CURVE

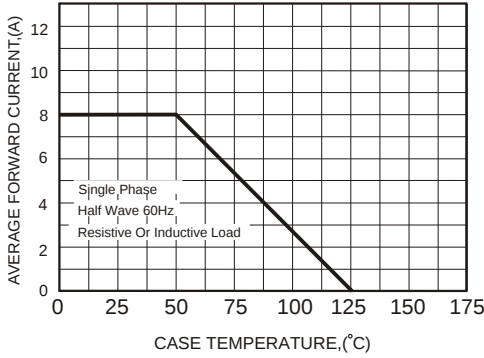


FIG.2-MAXIMUM NON-REPETITIVE FORWARD  
SURGE CURRENT

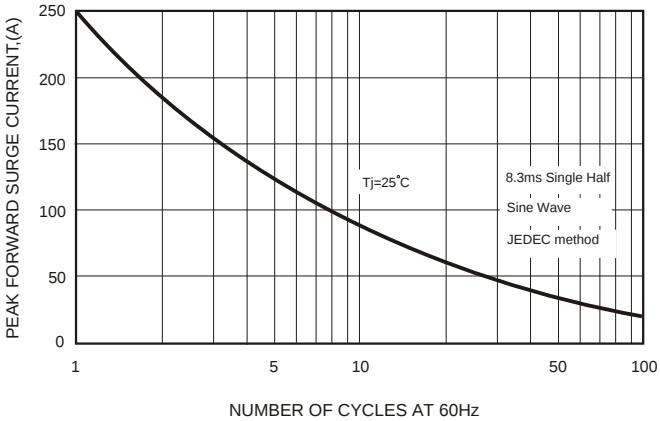


FIG.3-TYPICAL FORWARD  
CHARACTERISTICS

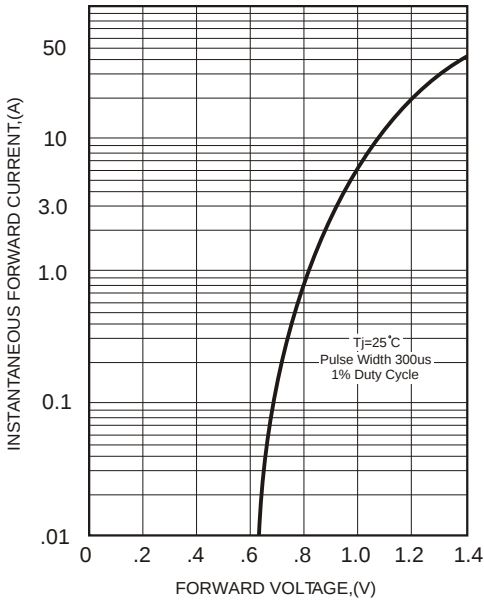


FIG.4-TYPICAL REVERSE  
CHARACTERISTICS

