

Micro-Power Voltage Detectors


General Description

The RT9809 is a micro-power voltage detector supervising the power supply voltage level for microprocessors (μ P) or digital systems. It provides internally fixed threshold levels with 0.1V per step ranging from 1.5V to 5V, which covers most digital applications. It features low supply current of 3 μ A.

The RT9809 performs supervisory function by sending out a reset signal whenever the VDD voltage falls below a preset threshold level. This reset signal will last the whole period before VDD recovering. Reset signal will release after VDD is recovered and lasts for the whole period of Reset Active Time-out period.

RT9809 is CMOS, active-low output and is provided in SOT-23 package.

Ordering Information

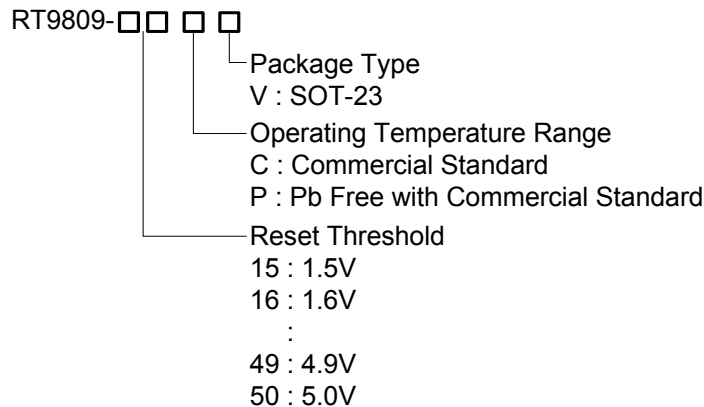

Marking Information

For marking information, contact our sales representative directly or through a RichTek distributor located in your area, otherwise visit our website for detail.


Features

- Internally Fixed Threshold 1.5V to 5V in 0.1V Step
- $\pm 2\%$ Accuracy
- Low Supply Current 3 μ A
- No External Components Required
- Quick Reset within 20 μ s
- Built-in Recovery Delay 200ms
- Low Functional Supply Voltage 0.9V
- Small 3-Pin SOT-23 Package


Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical μ P and μ C Power Monitoring
- Portable/Battery-Powered Equipment

Pin Configurations




Typical Application Circuit

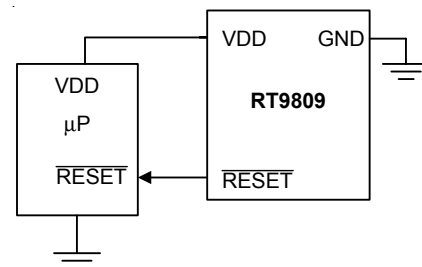

Functional Pin Description

Pin Name	Pin Function
GND	Ground Pin
RESET	Reset Pulse Output, Negative Pulse
VDD	Power Pin

Function Block Diagram

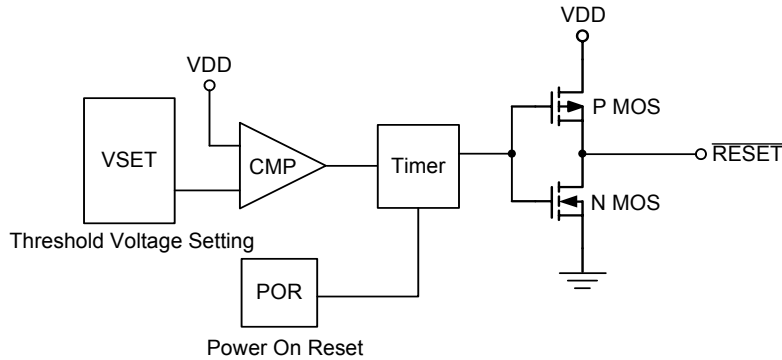

Absolute Maximum Ratings

- Terminal Voltage (with Respect to GND)
 - VDD ----- -0.3V to 6.0V
 - All Other Inputs ----- -0.3V to VDD+0.3V
- Input Current, VDD ----- 20mA
- Output Current, $\overline{\text{RESET}}$ ----- 20mA
- Power Dissipation, $P_D @ T_A = 25^\circ\text{C}$
 - SOT-23 ----- 0.25W
- Operating Junction Temperature Range ----- -40°C to 125°C
- Storage Temperature Range ----- -65°C to 125°C
- Package Thermal Resistance
 - SOT-23, θ_{JA} ----- 250°C/W
- Lead Temperature (Soldering, 5sec.) ----- 260°C







Electrical Characteristics

(VDD = 3.0V, unless specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Operating VDD (V_{OUT}) Range	VDD		0.9	--	6	V
Supply Current	I_{DD}	$V_{DD} = 1.5V \sim 3.5V, I_{OUT} = 0$	--	--	3	μA
		$V_{DD} = 3.5V \sim 5V, I_{OUT} = 0$	--	--	3.3	
Reset Threshold	V_{TH}	$T_A = 27^\circ\text{C}$	--	Note1	--	V
Threshold Voltage Accuracy	ΔV_{TH}	$T_A = 27^\circ\text{C}$	--	--	2	%
V_{CC} Drop to Reset Delay	t_{RD}	Drop = -125mV	--	--	20	μs
Reset Active Time Out Period	t_{RP}	$V_{DD} \geq 1.02 \times V_{TH}$	--	200	--	ms
$\overline{\text{RESET}}$ Output Voltage	V_{OH}	$V_{DD} > V_{TH}, I_{SOURCE} = 1\text{mA}$	--	$0.8V_{DD}$	--	V
	V_{OL}	$2 < V_{DD} < V_{TH}, I_{SINK} = 3.5\text{mA}$	--	0.4	--	

Note1: 1.5V to 5V, step 0.1V


Typical Operating Characteristics

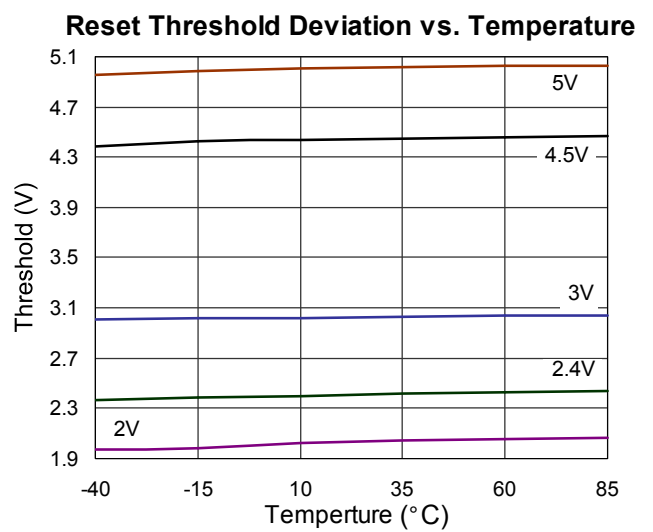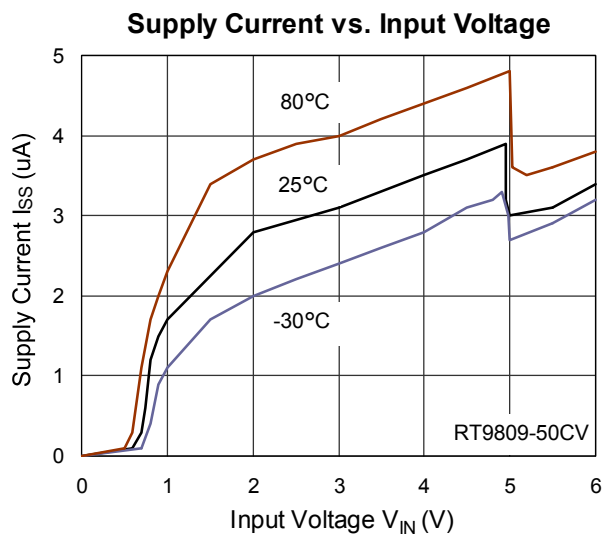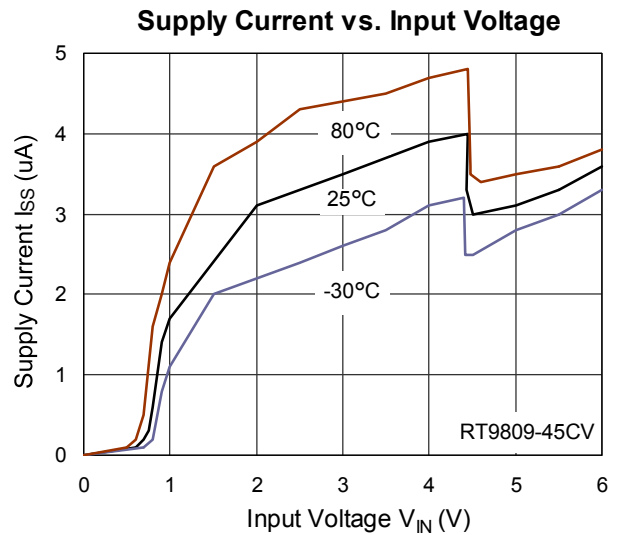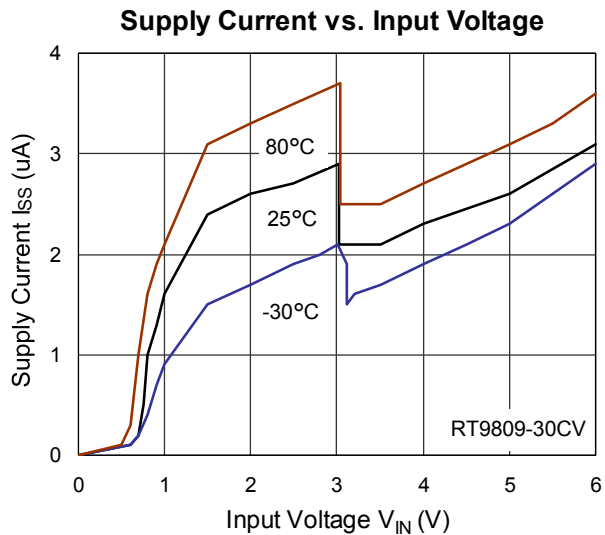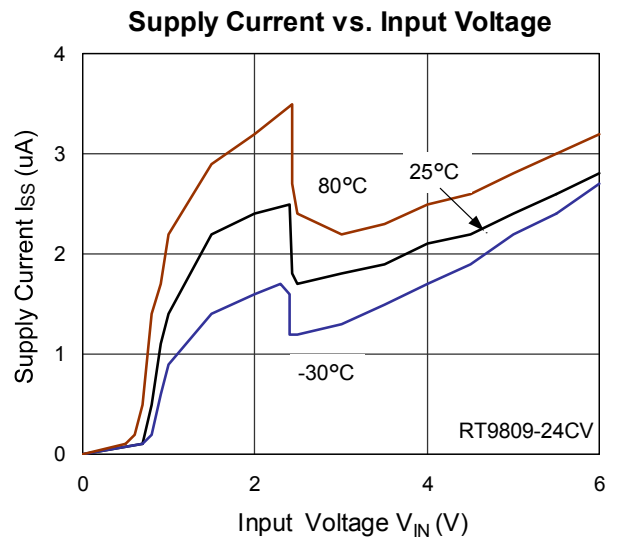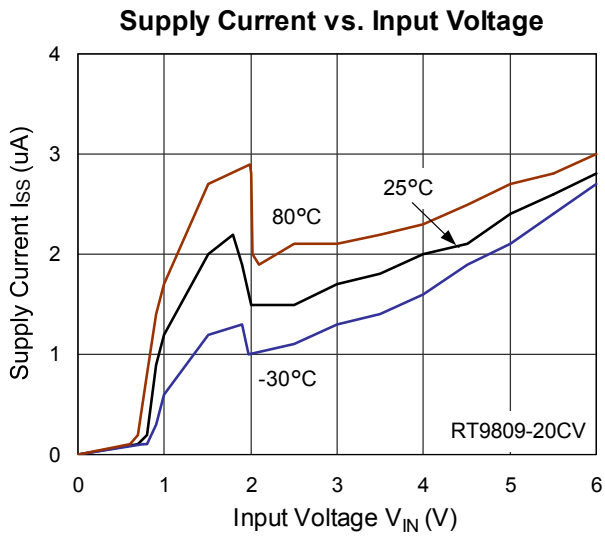


Power-Down Reset Delay vs. Temperature

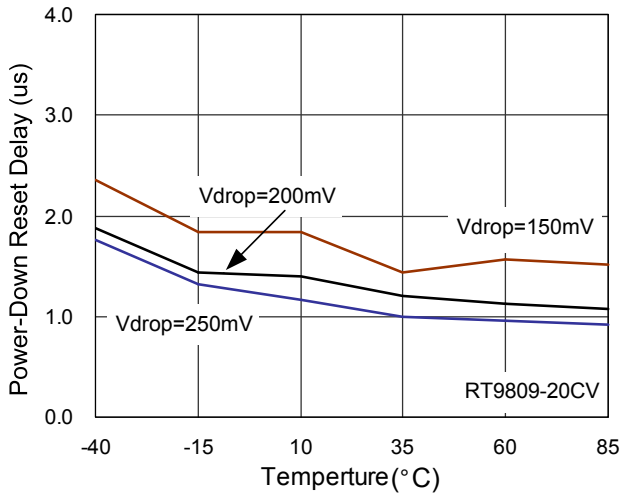


Power-Down Reset Delay vs. Temperature

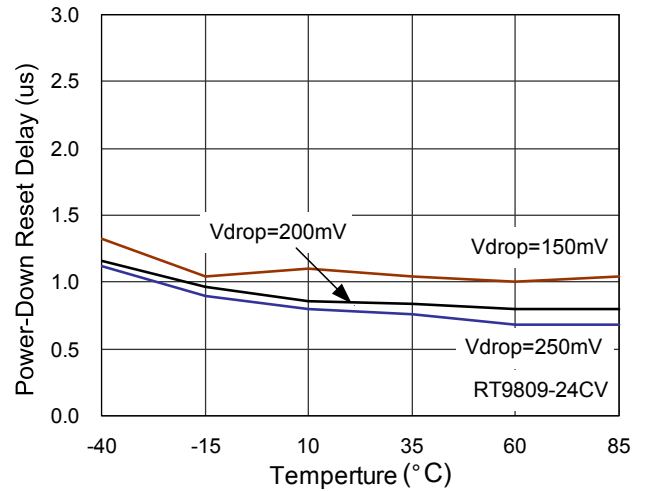


Power-Down Reset Delay vs. Temperature

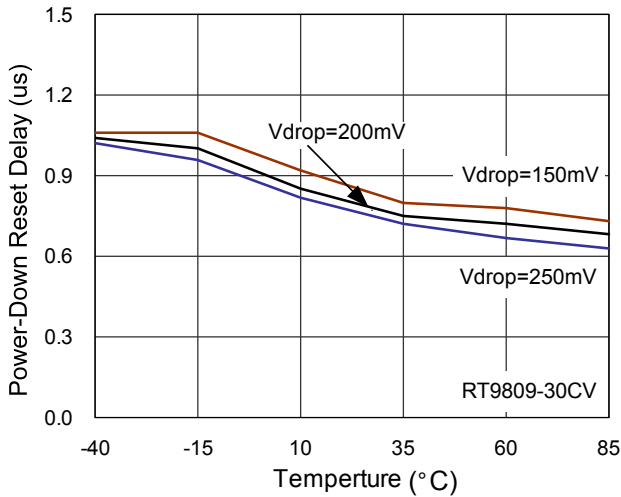


Power-Down Reset Delay vs. Temperature






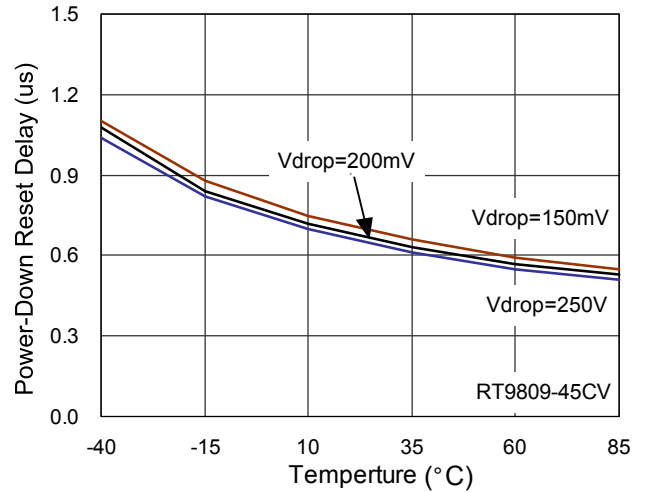








Power-Down Reset Delay vs. Temperature

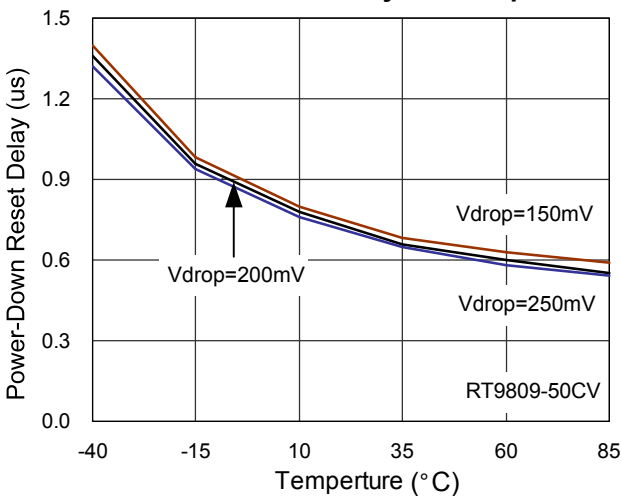


Power-Up reset Timeout vs. Temperature

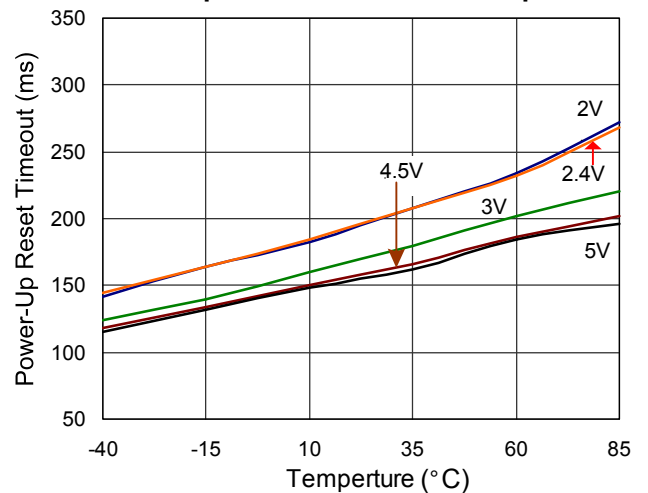


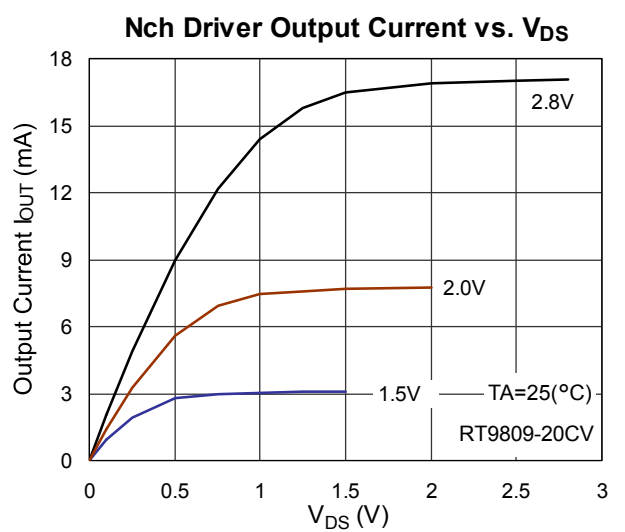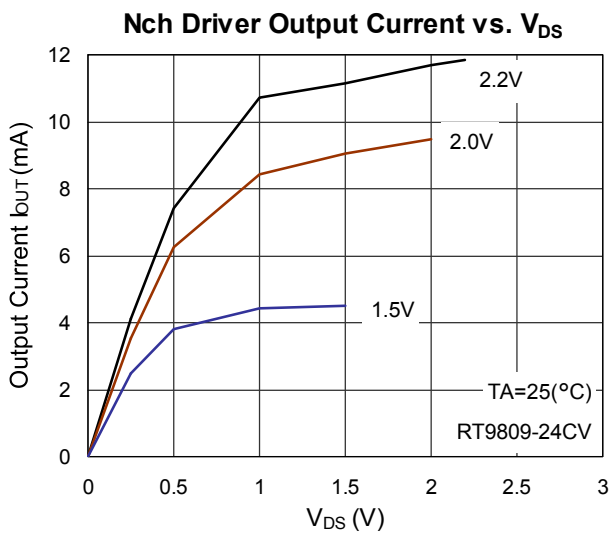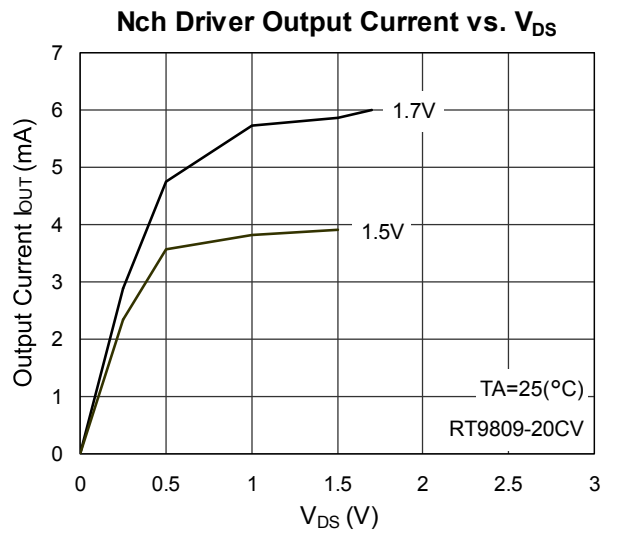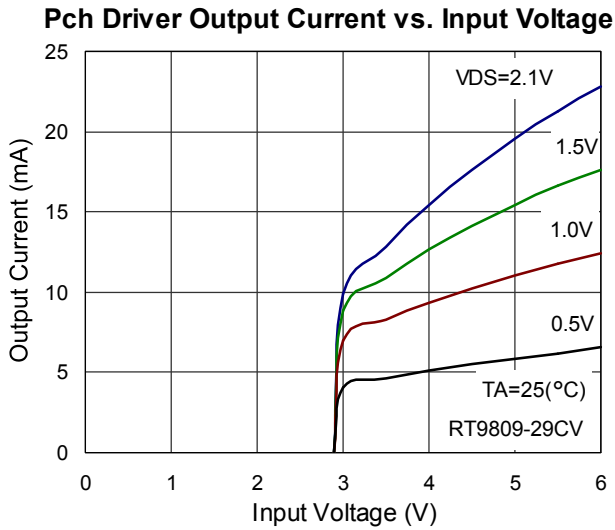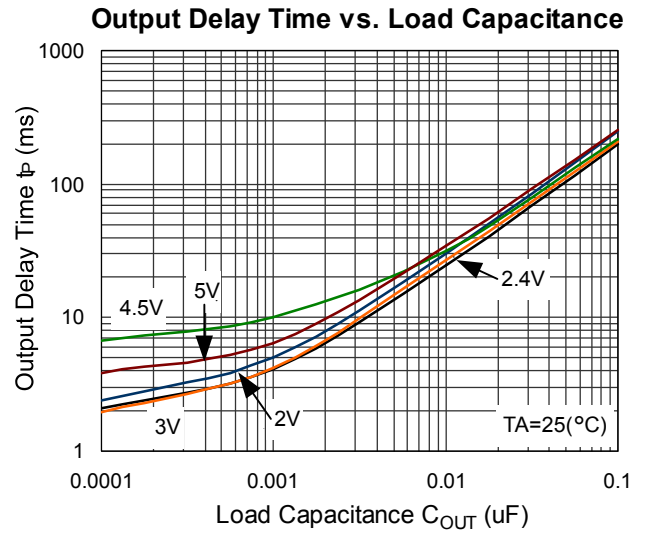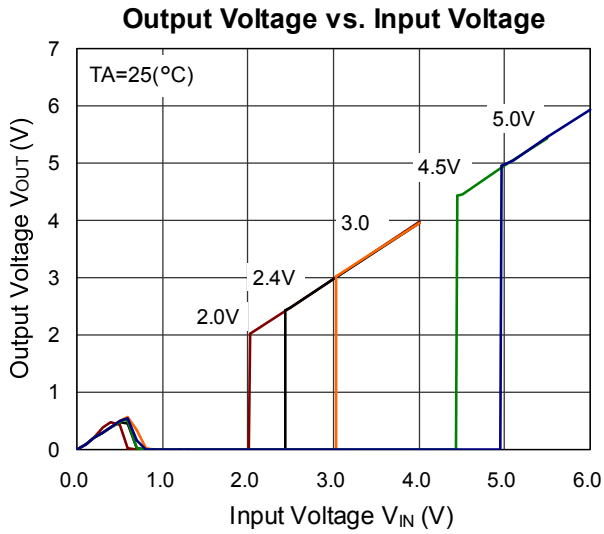

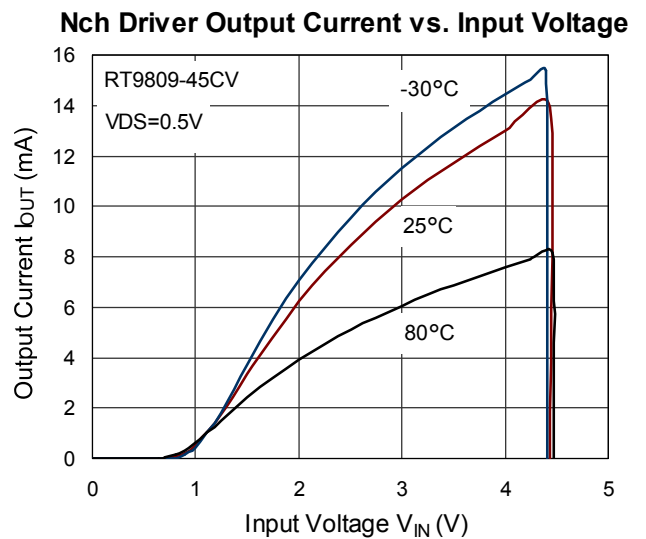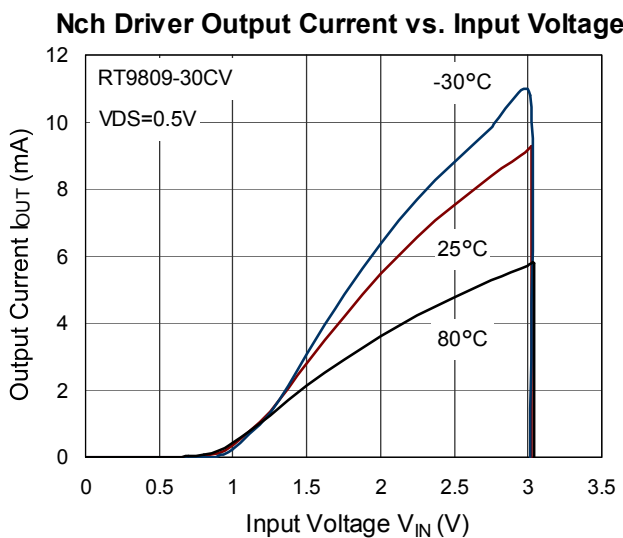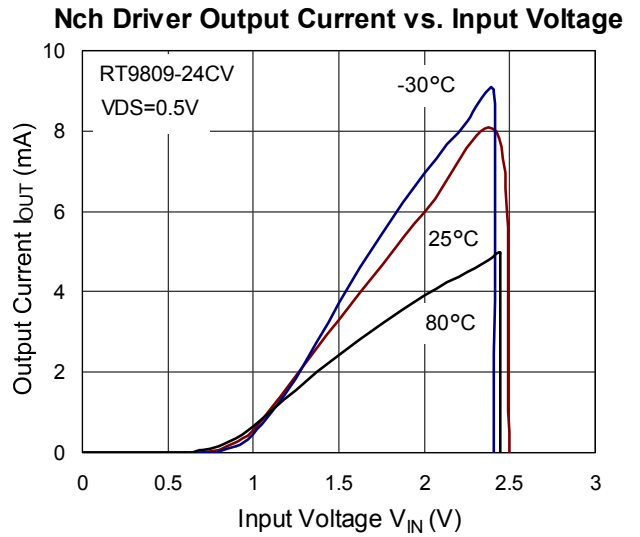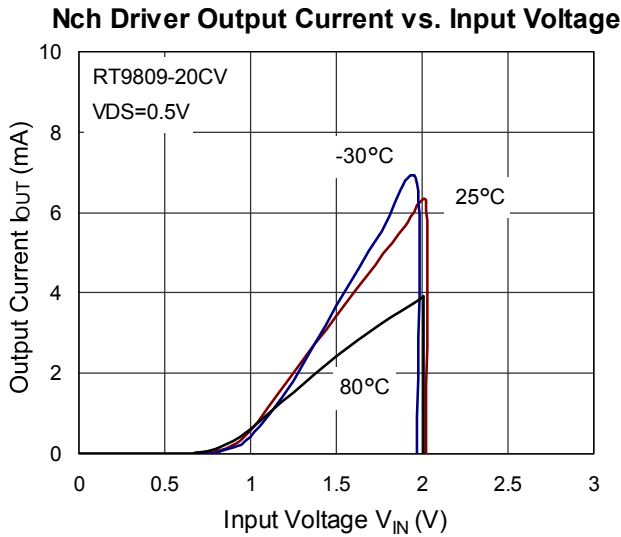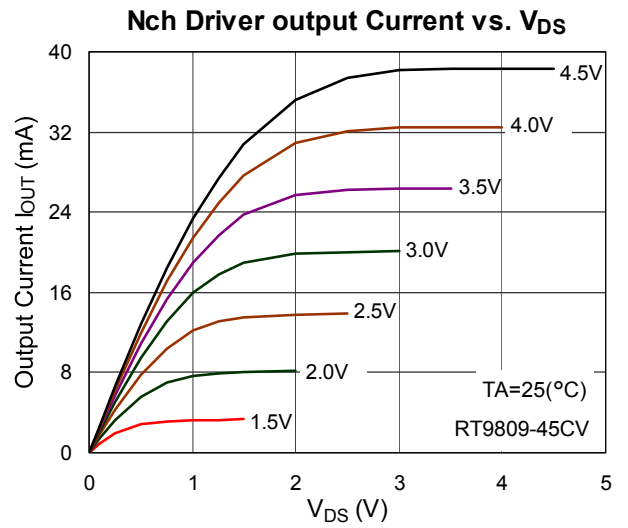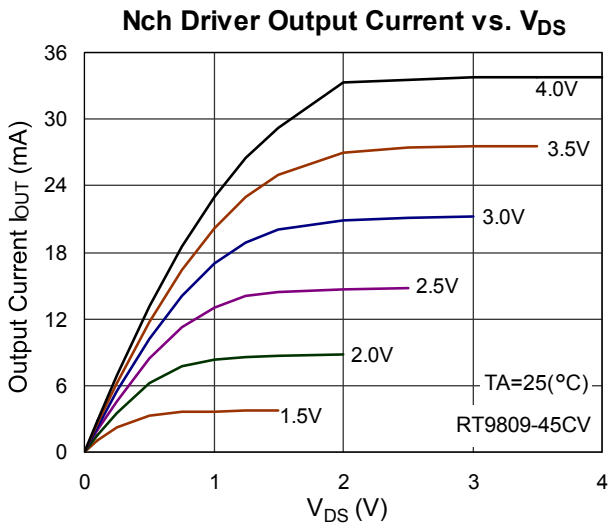

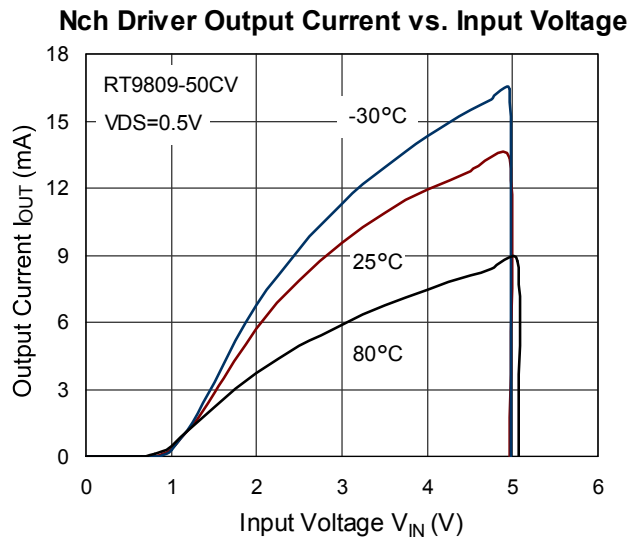

Outline Dimension

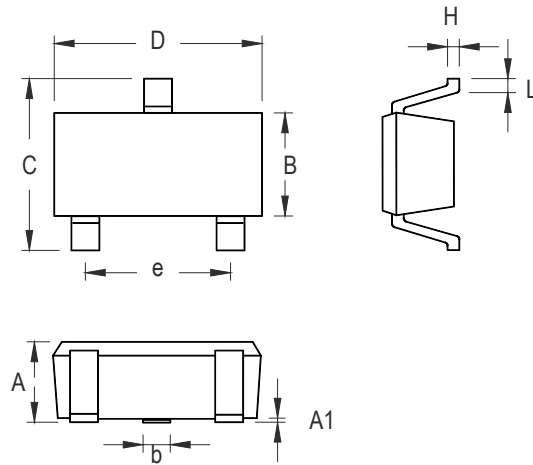

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.356	0.508	0.014	0.020
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	1.803	2.007	0.071	0.079
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23 Surface Mount Package

RICHTEK TECHNOLOGY CORP.

Headquarter
 5F, No. 20, Taiyuen Street, Chupei City
 Hsinchu, Taiwan, R.O.C.
 Tel: (8863)5526789 Fax: (8863)5526611

RICHTEK TECHNOLOGY CORP.

Taipei Office (Marketing)
 8F-1, No. 137, Lane 235, Paochiao Road, Hsintien City
 Taipei County, Taiwan, R.O.C.
 Tel: (8862)89191466 Fax: (8862)89191465
 Email: marketing@richtek.com