

RU2 - RU2Z

PRV : 200 - 800 Volts

Io : 1.0 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : DO-15 Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.4 gram

FAST RECOVERY RECTIFIER DIODES

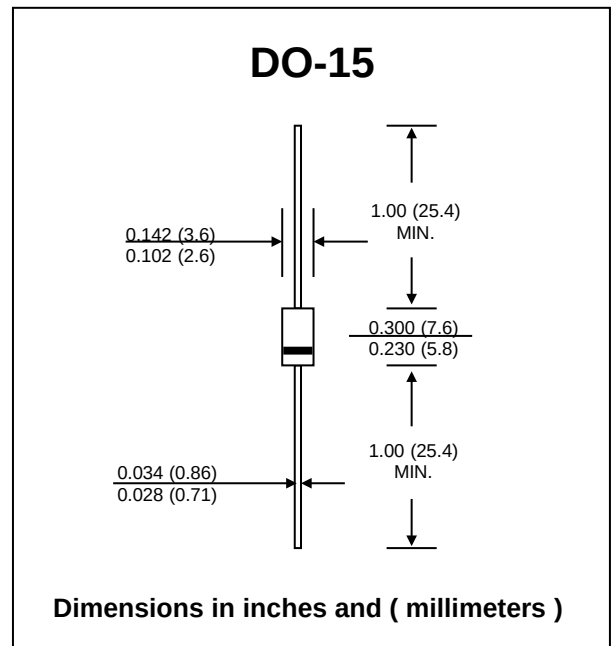

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	RU2Z	RU2	RU2B	UNIT
Maximum Peak Reverse Voltage	V_{RM}	200	600	800	V
Maximum Peak Reverse Surge Voltage	V_{RSM}	250	650	850	V
Maximum Average Forward Current $T_a = 50\text{ }^{\circ}\text{C}$	$I_{F(AV)}$	1.0			A
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine wave, Single Shot)	I_{FSM}	20			A
Maximum Forward Voltage at $I_F = 1\text{ Amp.}$	V_F	1.5			V
Maximum Reverse Current at $V_R = V_{RM}$ $T_a = 25\text{ }^{\circ}\text{C}$	I_R	10			μA
Maximum Reverse Current at $V_R = V_{RM}$ $T_a = 100\text{ }^{\circ}\text{C}$	$I_{R(H)}$	300			μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	400			ns
Junction Temperature Range	T_J	- 40 to + 150			$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	- 40 to + 150			$^{\circ}\text{C}$

Note :

(1) Reverse Recovery Test Conditions : $I_F = 10\text{ mA}$, $I_{RP} = 10\text{ mA}$.

RATING AND CHARACTERISTIC CURVES (RU2 - RU2Z)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

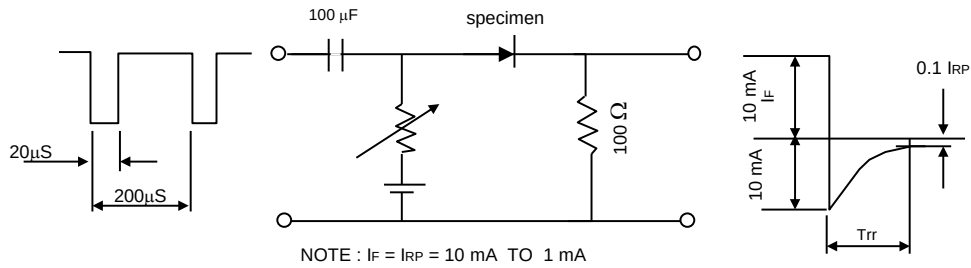


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

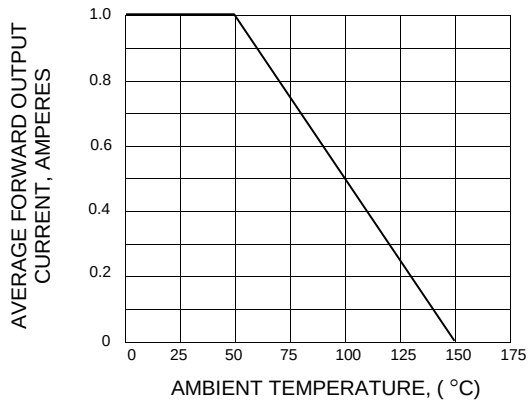


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

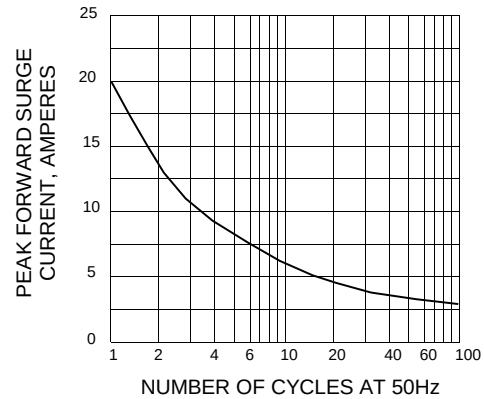


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

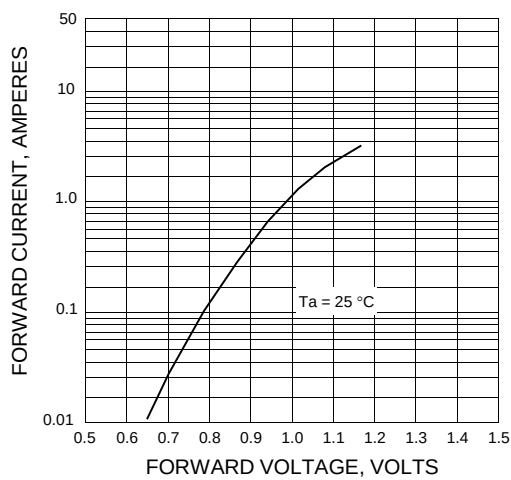


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

