

Fast Recovery Diodes



$V_{RM}: 100 \sim 2000V$




$I_o: 0.1 \sim 4.0A$


RU/RP/RS/RH

Rating/ Characteristics	Absolute Maximum Ratings						Electrical Characteristics (Ta=25°C)					Others																
	V _{RSM} (V)	V _{RM} (V)	I _o (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _{R(H)} (μA)	t _{rr} (μs)	Outline Drawing	Weight(g)	Taping	Note													
Type No.			() With Flt Ta=60°C	50Hz Half Sine Wave Single Pulse			max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°Cmax	I _F /I _{RP} (mA)																	
RU 2M	450	400	1.1	20	-40~+130		1.2	1.1	10	300	0.4	②③	0.44	Available	For High Frequency Rectification													
RU 2AM	650	600																										
RU 2YX	100	100														30	-40~+140	0.95										
RU 3	450	400	1.5	20	-40~+130		1.5	1.5	10	400	0.4	10/10	0.6	Available	For High Frequency Rectification													
RU 3A	650	600																										
RU 3M	450	400																										
RU 3AM	650	600														50												
RU 3YX	100	100	2.0	200	-40~+140		0.95	2.0	10	300	0.2	100/100	④	1.0	Available	For High Frequency Rectification												
RU 30	400	400																										
RU 30A	600	600																										
RU 4Y	150	100	2.0	70	-40~+150		1.3	3.5	10	500	0.4	10/10	1.2	-	For High Frequency Rectification													
RU 4Z	250	200	(3.5)																									
RU 4	450	400	1.5																									
RU 4A	650	600														(3.0)												
RU 4B	850	800	1.5(2.5)																									
RU 4C	1050	1000														1.2(1.5)												
RU 4D	1350	1300	1.5(2.5)																									
RU 4M	400	400	2.0													70	-40~+140	0.85	2.0	10	10	300	0.2	100/100	②③	0.44	Available	For High Frequency Rectification
RU 4AM	600	600	(3.5)																									
RU 4YX	100	100	2.2(4.0)																									
RP 1H	2000	2000	0.1	5	-40~+140	7.0	0.1	20	10	10	0.5	②③	0.44	Available	For High Frequency Rectification													
RS 3FS	1500	1500	2.0	50	-40~+150		1.1	3.0	50	500	2.0	④	1.0	-	For High Frequency Rectification													
RS 4FS	1500	1500	2.0																									
RH 4F	1500	1500	1.5(2.5)													50	1.5	2.5	10	350	4.0	10/10	③	1.2	-			


Outline Drawing ②

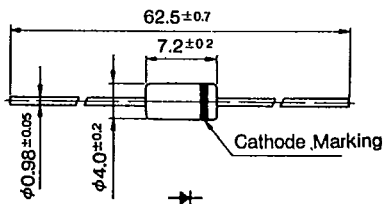

Outline Drawing ③

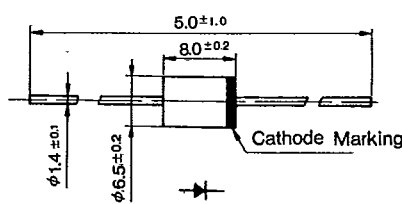


Outline Drawing ④

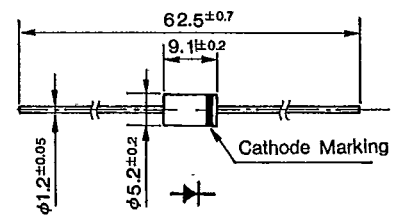

②~④ Resin Mold Type, Flammability : UL94V-0 or Equivalent


RU 2M RU 2AM

Io-Ta Deratings

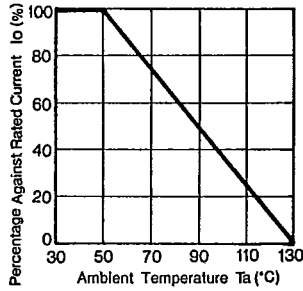

RU 2YX


Io-Ta Deratings

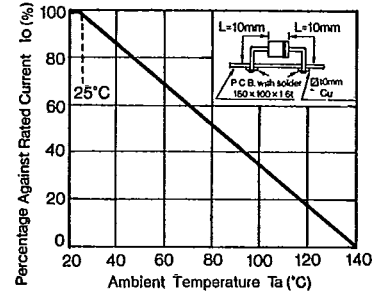

RU 3 Series


RU 3M Series

Io-Ta Deratings

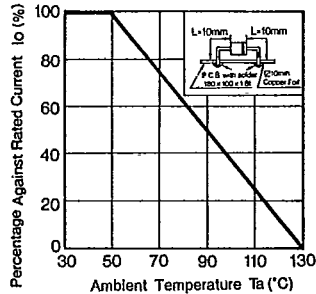


RU 3YX

Io-Ta Deratings

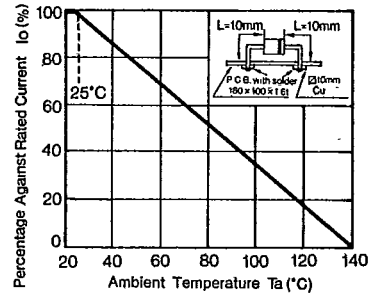

RU30 Series


Ta-VRA.S.O

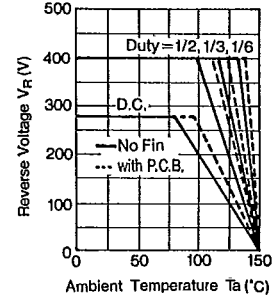

RU 4 Series


RU 4B

Io-Ta Deratings

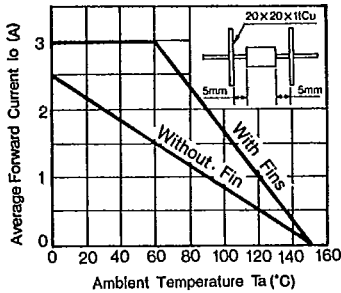


RU 4C

Io-Ta Deratings

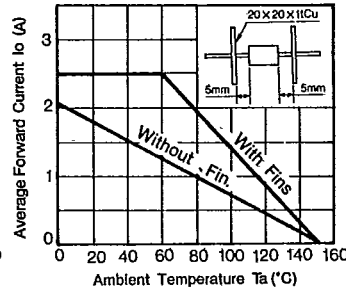


RU 4D

Io-Ta Deratings

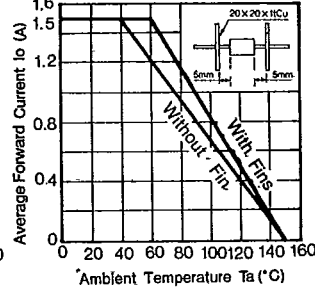


RU 4DS

Io-Ta Deratings

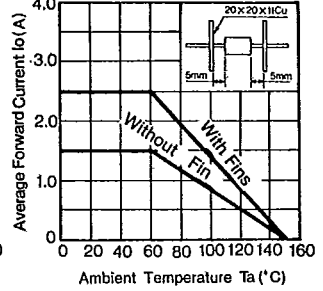


RU 4M/RU 4AM

Io-Ta Deratings

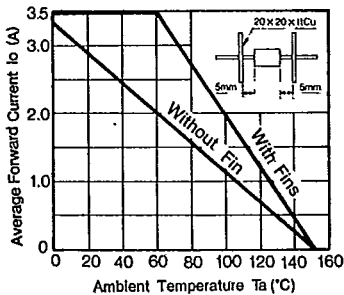


RU 4YX

Io-Ta Deratings

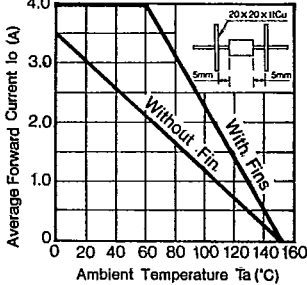


RP 1H

Io-Ta Deratings

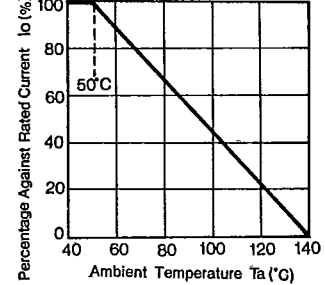


RS 3FS

Io-Ta Deratings

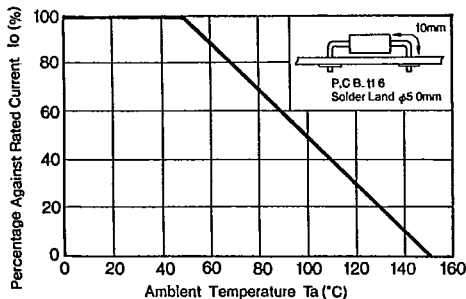


RS 4FS

Io-Ta Deratings

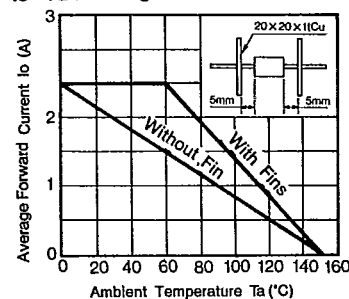

RH 4F

Io-Ta Deratings

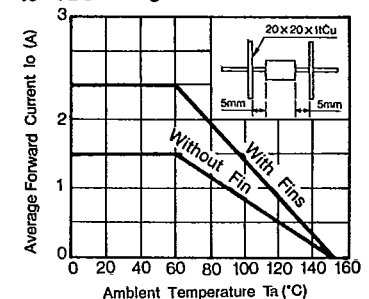


Symbols/trr Measurement Circuit

Symbols

V_{RSM}	Peak Reverse Surge Voltage	I_{RSM}	Peak Reverse Surge Current	T_{stg}	Storage Temperature
V_{RM}	Peak Reverse Voltage	I_R	Reverse Current	t_{rr}	Reverse Recovery Time
V_{P-P}	Reverse Voltage (Peak to Peak)	I_{RP}	Peak Reverse Current	C_t	Total Capacitance Between Terminals
V_R	Reverse Voltage	$I_{R(H)}$	Reverse Current (High Temperature)	$R_{th(j-c)}$	Thermal Resistance, Junction to Case
V_F	Forward Voltage	I_Z	Avalanche Current	r_z	Temperature Coefficient of Breakdown Voltage
V_B	Breakdown Voltage	I_{ZSM}	Allowable Avalanche Current	R_z	Equivalent Resistance of Breakdown Region
I_o	Average Rectified Forward Current	T_a	Ambient Temperature	$P_{F(AV)}$	Average Forward Power Dissipation
I_F	Forward Current	T_j	Junction Temperature	I^2_t	I^2_t limiting Value
$I_{F(AV)}$	Average Forward Current	T_{opr}	Operating Ambient Temperature		
I_{FSM}	Peak Forward Surge Current	T_c	Case Temperature		

Reverse Recovery Time Measurement Circuit

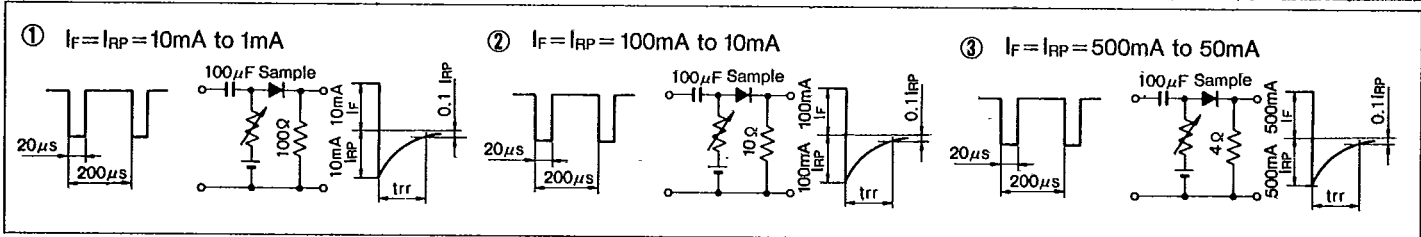

Taping Specifications

Excluding High Voltage Diodes


Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
V Add Suffix [V] to Type No.	<p>Tape Carrier Method</p> <p>(1) Right side of taping direction is cathode. (2) Place electrode side down when casing. (3) Provide leader tape of 150~200mm at beginning of tape. (4) Provide space of more than 10 pitches each for beginning and end of tape.</p>	<p>Reel</p> <p>Marking of Type No., Lot No. and Quantity</p>	1,800 pcs per reel
V Add Suffix [V] to type No.	<p>Axial Taping</p>	<p>Reel</p> <p>Markings of Type No. Lot No. and Quantity</p>	5,000 pcs per reel (2.7φ body) 3,000 pcs per reel (4.0φ body)

Taping Specifications

Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
<p>V1</p> <p>Add Suffix [V1] to Type No.</p>	<p>Axial Taping</p>	<p>Ammunition Pack</p> <p>Broken Line: Perforation</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>2,000 pcs per box (2.7 φ body)</p> <p>1,000 pcs per box (4.0 φ body)</p>
<p>VO</p> <p>Add Suffix [VO] to Type No.</p>	<p>Axial Taping</p>	<p>Ammunition Pack</p> <p>Broken Line: Perforation</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>2,000 pcs per box (2.7 φ body)</p> <p>(2.4 φ body)</p>
<p>V3</p> <p>Add Suffix [V3] to Type No.</p>	<p>Axial Taping</p>	<p>Reel</p> <p>Markings of Type No, Lot No, and Quantity</p> <p>Core Flange</p> <p>Stopper</p>	<p>1,500 pcs per reel (5.2 φ body)</p>
<p>V4</p> <p>Add Suffix [V4] to Type No.</p>	<p>Axial Taping</p>	<p>Ammunition Pack</p> <p>Broken Line: Perforation</p> <p>Trade Mark</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>1,000 pcs per box (5.2 φ body)</p>
<p>W</p> <p>Add Suffix [W] to Type No.</p>	<p>Radial Taping</p>	<p>Ammunition Pack</p> <p>Broken Line: Perforation</p> <p>ANODE</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>4,000 pcs per box (2.7 φ body)</p> <p>(0.6 φ lead)</p>
<p>WS</p> <p>Add Suffix [WS] to Type No.</p>	<p>Radial Taping (Applicable to AO Series)</p>	<p>Ammunition Pack</p> <p>ANODE</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>2,500 pcs per box (2.4 φ body)</p>
<p>WK</p> <p>Add Suffix [WK] to Type No.</p>	<p>Radial Taping (Applicable to AO Series)</p>	<p>Ammunition Pack</p> <p>ANODE</p> <p>Markings of Type No, Lot No, and Quantity</p>	<p>2,500 pcs per box (2.4 φ body)</p>


Marking Guide

1 Small TMD




- ① Type Designation (in abbreviation)
AM01 is abbreviated as M.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
- ③ A: Year (Last Number of AD Year)
B: Month (Jan. to Sept. are represented by numbers 1 to 9 respectively, and Oct., Nov., and Dec. are abbreviated as O, N and D respectively)
- ④ Cathode Band: Successive Band, however AU02 Type is Non-Successive Band.

2 E/EO Type TMD

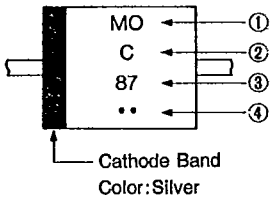

- ① Type Designation (in abbreviation)
EM01 is abbreviated as MO, EM2 is abbreviated as M2.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
B: 800 V, C: 1000V, F: 1500V
However, EU02A to be marked 2A, and EU2YX to be marked Y.
- ③ Abbreviations Representing Production Period
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ④ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days


3 R Type TMD



- ① Type Designation: Mark in 2 sets
- ② Production Period: Mark in 4 sets
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ③ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days
- ④ Cathode Band Color: Silver: For Power Supply
Yellow: For Middle Speed
Red : For High Speed and Ultra-High Speed


4 RB40/60

(RB40 Series)




- ① Peak Reverse Voltage Designation
1, 2, 4, 6, C
Production Period
- ② Year (Last Number of AD Year)
- ③ Month (1~9, O, N, D)
- ④ Divided in 3 ten day terms
A: 1st 10days, B: 2nd 10days
C: 3rd 10days
Color Designation: Silver

(RB60 Series)




Dot Designation RB601 Violet
RB602 No Color
RB604 Blue
RB606 White

5 RBV/RBA

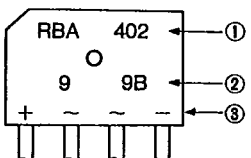


- ① Type Designation
- ② Lot Number
1st : Year (Last Number of AD Year)
2nd: Month (1~9, O, N, D)
3rd : Divided 1~3 ten day Terms
A: 1st 10 days B: 2nd 10 days
C: 3rd 10 days
- ③ In-Put Designation

6 T0220 Type (FM or CT Type)




- ① Type Designation
Show FMU-12S as FMU12S.
- ② Polarity: Rectifier Symbols
- ③ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

7 T0220 Type (FM or CT Type, single chip)




- ① Type Designation: Omit Last Letter
Show FML-G12S as FMLG12.
- ② Last Letter of Type Designation
- ③ Polarity: Rectifier Symbols
- ④ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

8 T03P Type (FM or CT Type)




- ① Type shown in full designation
However, CTB-34/34S/34M are marked as CTB-34, CTU-G3DR is marked as CTUG3DR.
- ② Polarity: Rectifier Symbols
- ③ Lot Number:
1) M, U, G and L Types
First Number : Last Digit of AD Year
Second Number : Month
Third and Fourth Numbers: Day
Fifth Number : None
2) For types CTB-34/34S/34M, the fifth letter shows type designation. If no fifth number, the type is CTB-33 or CTB-34.
3) Marking Color: Silver

9 MI-10/15 Type



- ① MI-10/15 is die-stamped on the top of the case.
- ② Rectifier Symbols
- ③ Lot Number:
First Number : Peak Reverse Voltage:
(Letter) 0=50V, 1=100V, 2=200V,
4=400V, 6=600V, C=1000V
Second Number : Last Digit of AD Year
Third Number : Month
Fourth and Fifth Numbers: Day
Sixth Number : Production number and
U: Voltage Doubler Type

10 SFP Type



- ① Type Designation:
SFPB-64 is abbreviated at B64,
- ② Cathode Band