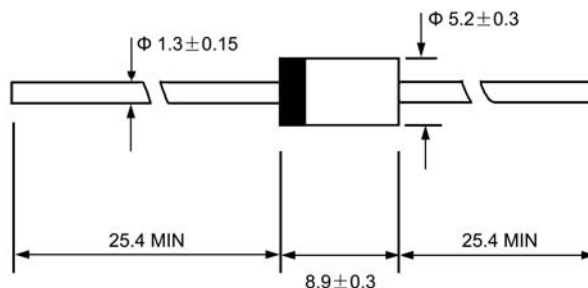



DO - 27


Dimensions in millimeters

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with freon, alcohol, Isopropand and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		RU4D	RU4DS	UNITS
Maximum peak repetitive reverse voltage	V_{RRM}	1300		V
Maximum RMS voltage	V_{RMS}	910		V
Maximum DC blocking voltage	V_{DC}	1300		V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^{\circ}\text{C}$	$I_{F(AV)}$	1.5	2.5	A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @ $T_J=125^{\circ}\text{C}$	I_{FSM}	50.0		A
Maximum instantaneous forward voltage @ $I_F=I_{F(AV)}$	V_F	1.8		V
Maximum reverse current @ $T_A=25^{\circ}\text{C}$ at rated DC blocking voltage @ $T_A=100^{\circ}\text{C}$	I_R	50.0 500.0		μA
Maximum reverse recovery time (Note1)	t_{rr}	300		ns
Typical junction capacitance (Note2)	C_J	50		pF
Typical thermal resistance (Note3)	$R_{\theta JL}$	8		$^{\circ}\text{C}/\text{W}$
Operating junction temperature range	T_J	- 55 ----- + 150		$^{\circ}\text{C}$
Storage temperature range	T_{STG}	- 55 ----- + 150		$^{\circ}\text{C}$



NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to lead.

Ratings AND Characteristic Curves

FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

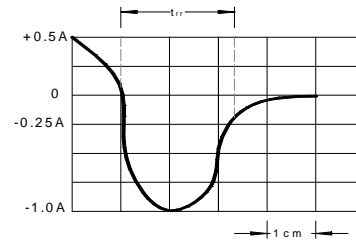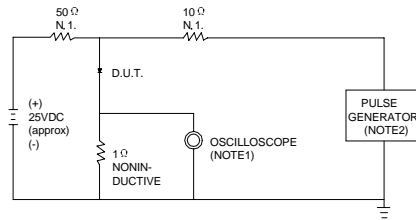

NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = $1M\Omega$, 22pF.
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω .

SET TIME BASE FOR 150ns/cm

FIG.2 – TYPICAL FORWARD CHARACTERISTIC

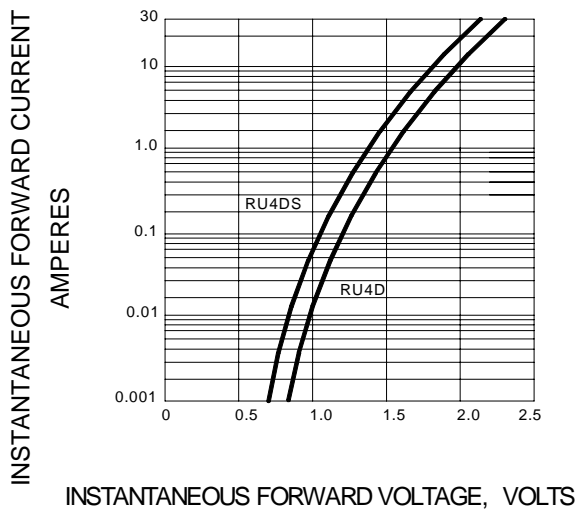


FIG.3 – FORWARD DERATING CURVE

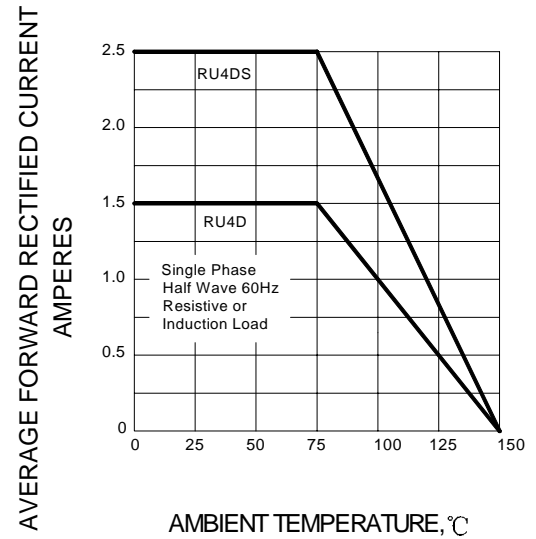


FIG.4 – PEAK FORWARD SURGE CURRENT

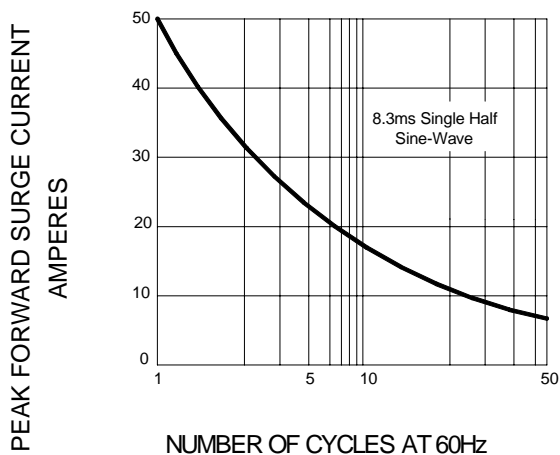


FIG.5 – TYPICAL JUNCTION CAPACITANCE

