
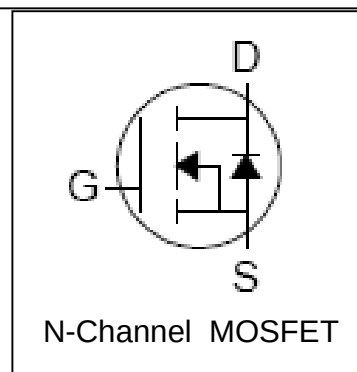


Features

- 75V/55A,
 $R_{DS(ON)} = 11m\Omega(Typ.) @ V_{GS}=10V$
- Super High Dense Cell Design
- 100% avalanche tested
- Lead Free and Green Devices Available
(RoHS Compliant)

Pin Description

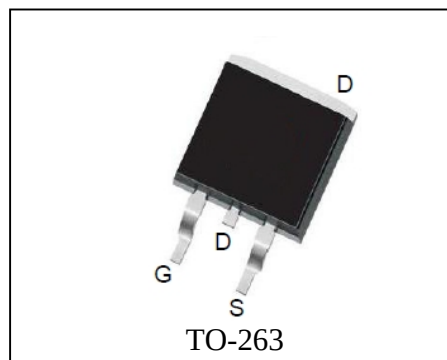

Applications

- DC-DC Converters and Off-line UPS
- Automotive Load Control
- Electronic Power Steering System
- Electronic Valve Train System

Absolute Maximum Ratings





Symbol	Parameter		Rating	Unit
Common Ratings (T _A =25°C Unless Otherwise Noted)				
V _{DSS}	Drain-Source Voltage		75	V
V _{GSS}	Gate-Source Voltage		±25	
T _J	Maximum Junction Temperature		175	°C
T _{STG}	Storage Temperature Range		-55 to 175	°C
I _S	Diode Continuous Forward Current	T _C =25°C	50	A
Mounted on Large Heat Sink				
I _{DP}	300μs Pulse Drain Current Tested	T _C =25°C	200 ^①	A
I _D	Continuous Drain Current(V _{GS} =10V)	T _C =25°C	55 ^②	A
		T _C =100°C	46	
P _D	Maximum Power Dissipation	T _C =25°C	111	W
		T _C =100°C	56	W
R _{θJC}	Thermal Resistance-Junction to Case		1.35	°C/W
Drain-Source Avalanche Ratings				
E _{AS} ^③	Avalanche Energy, Single Pulsed		430	mJ

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Test Condition	RU7550S			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	75			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 75V, V _{GS} =0V			1	μA
		T _J =85°C			10	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	2	3	4	V
I _{GSS}	Gate Leakage Current	V _{GS} =±25V, V _{DS} =0V			±100	nA
R _{DS(ON)} ^④	Drain-Source On-state Resistance	V _{GS} = 10V, I _{DS} =30A		11	13	mΩ
Diode Characteristics						
V _{SD} ^④	Diode Forward Voltage	I _{SD} =30A, V _{GS} =0V		0.8	1.2	V
t _{rr}	Reverse Recovery Time	I _{SD} =30A, dI _{SD} /dt=100A/μs		33		ns
Q _{rr}	Reverse Recovery Charge			30		nC
Dynamic Characteristics ^⑤						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.8		Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} = 35V, Frequency=1.0MHz		1870		pF
C _{oss}	Output Capacitance			280		
C _{rss}	Reverse Transfer Capacitance			93		
t _{d(ON)}	Turn-on Delay Time	V _{DD} =40V, R _L =30Ω, I _{DS} =30A, V _{GEN} = 10V, R _G =4.7Ω		10		ns
t _r	Turn-on Rise Time			55		
t _{d(OFF)}	Turn-off Delay Time			31		
t _f	Turn-off Fall Time			21		
Gate Charge Characteristics ^⑤						
Q _g	Total Gate Charge	V _{DS} =60V, V _{GS} = 10V, I _{DS} =30A		35		nC
Q _{gs}	Gate-Source Charge			11		
Q _{gd}	Gate-Drain Charge			8		


- Notes: ① Pulse width limited by safe operating area.
 ② Calculated continuous current based on maximum allowable junction temperature.
 ③ Limited by $T_{Jmax}, I_{AS}=25A, V_{DD}=48V, R_G=50\Omega$, Starting $T_J=25^{\circ}\text{C}$.
 ④ Pulse test; Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
 ⑤ Guaranteed by design, not subject to production testing.

Typical Characteristics

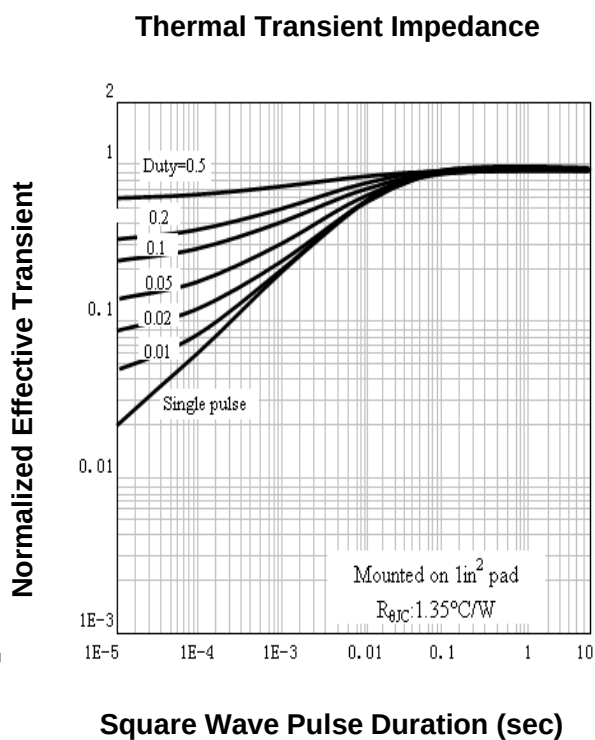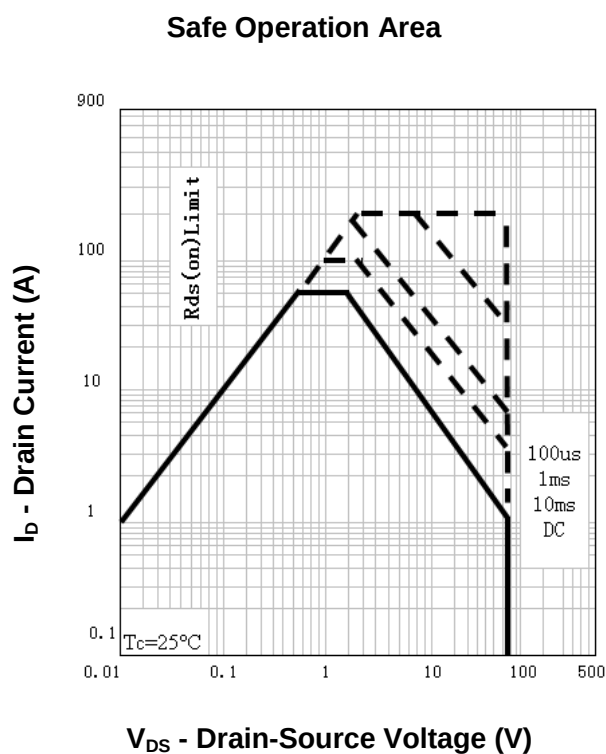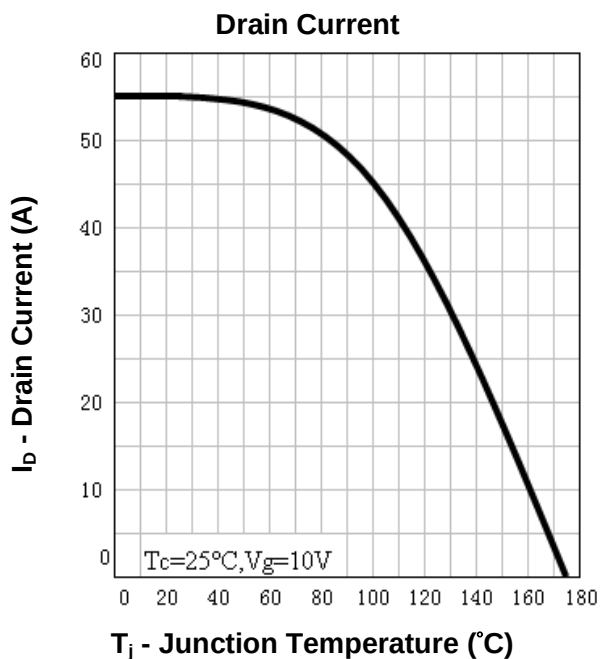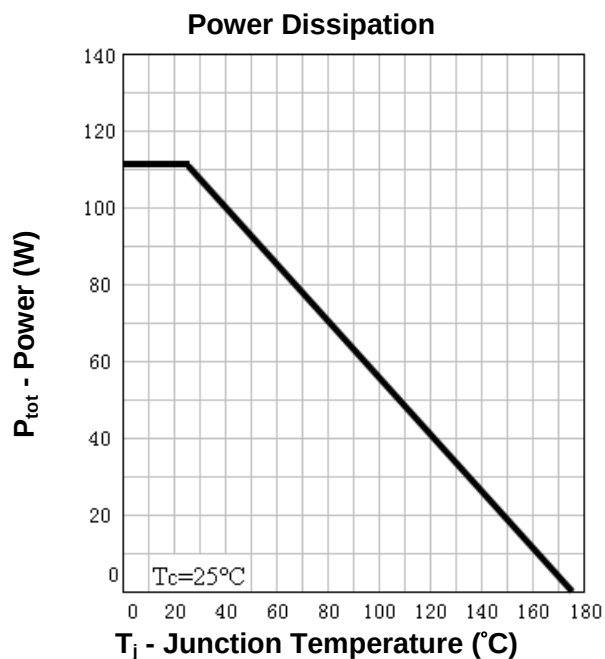


Typical Characteristics

Output Characteristics

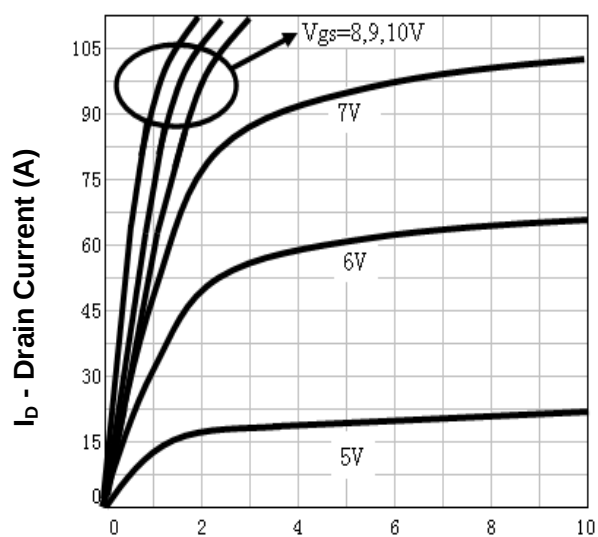


V_{DS} - Drain-Source Voltage (V)

Drain-Source On Resistance

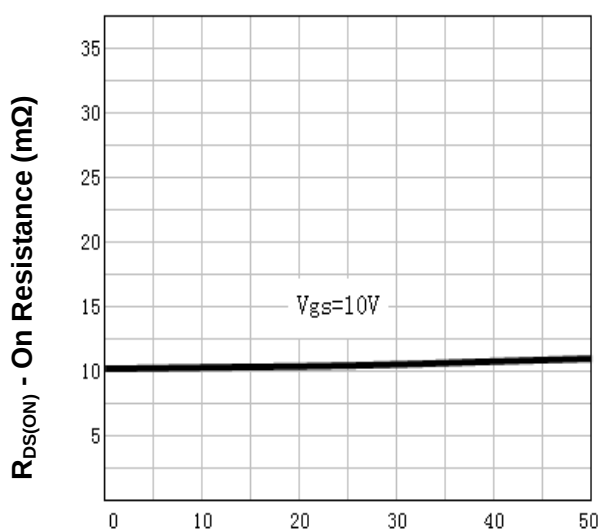


I_D - Drain Current (A)

Drain-Source On Resistance

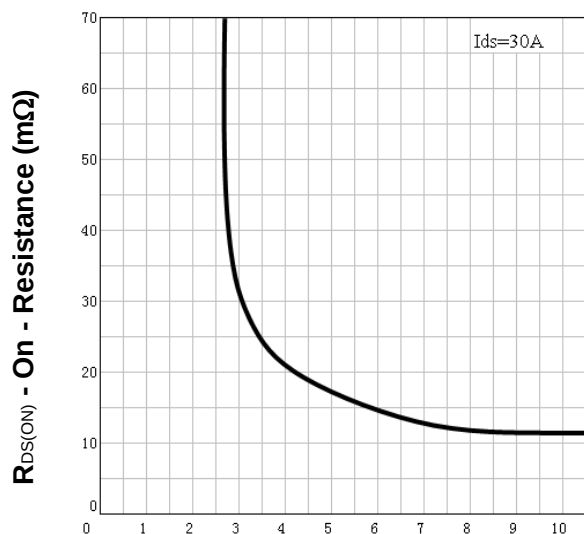

V_{GS} - Gate-Source Voltage (V)


Gate Threshold Voltage

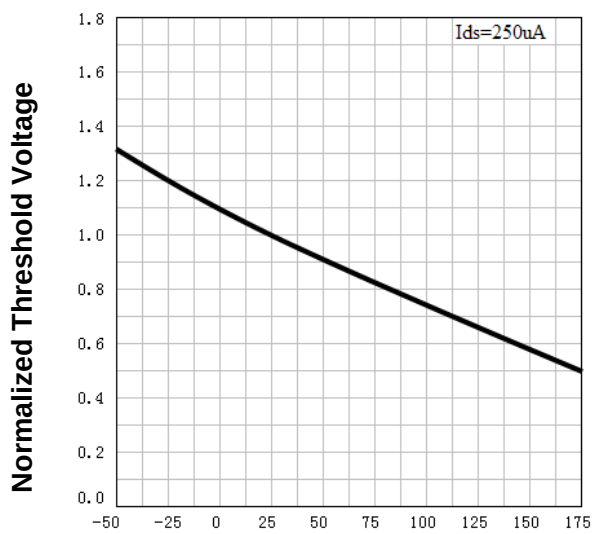


T_J - Junction Temperature ($^{\circ}C$)

Typical Characteristics


Drain-Source On Resistance

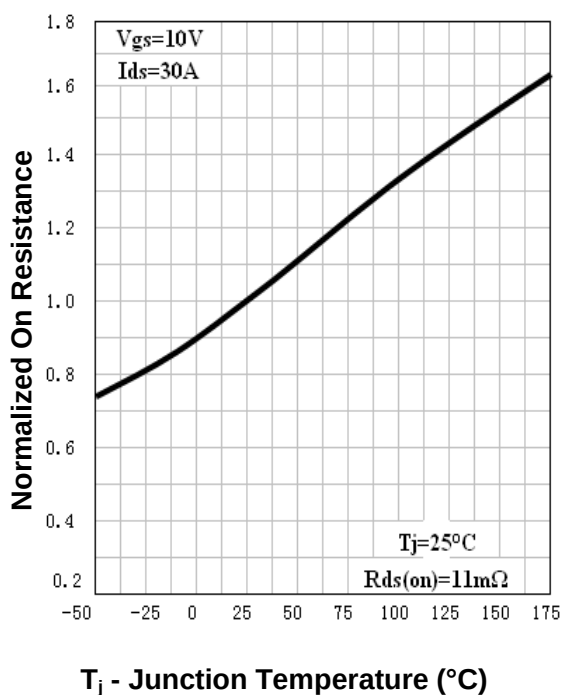


Source-Drain Diode Forward

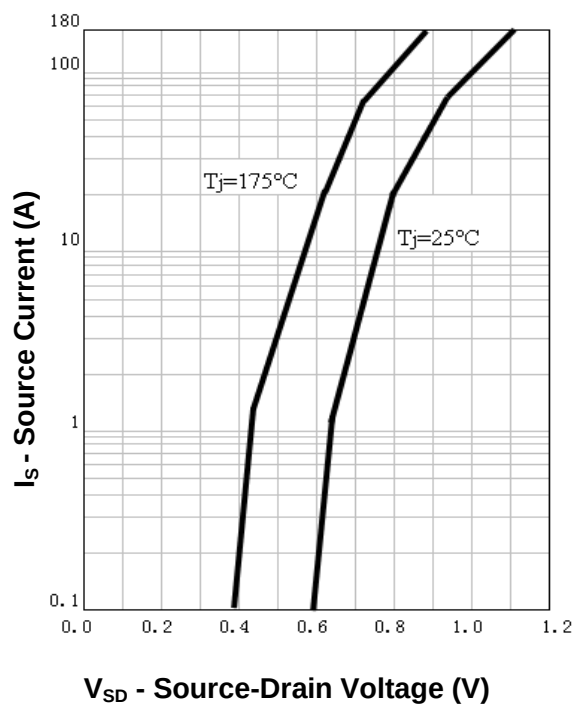



Capacitance

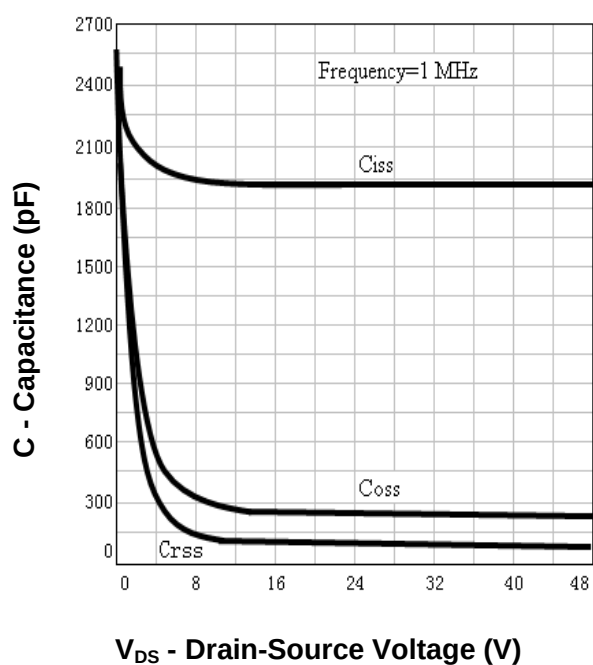



Gate Charge

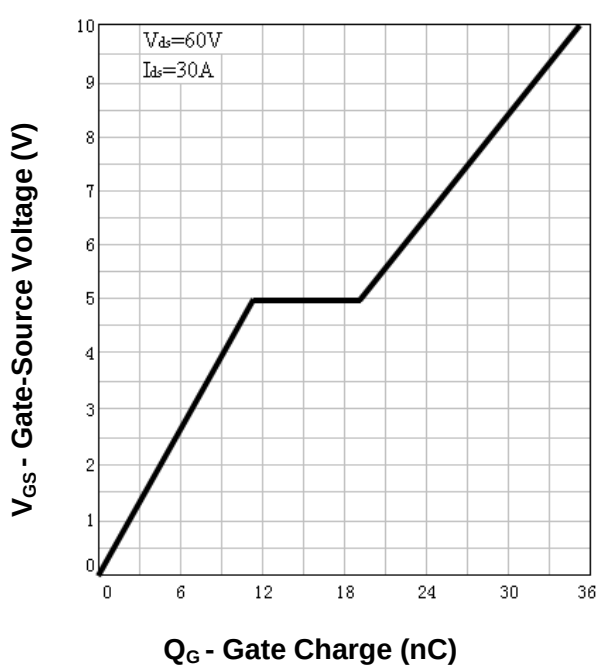

Avalanche Test Circuit and Waveforms

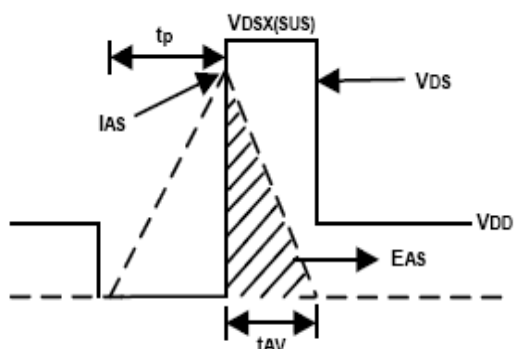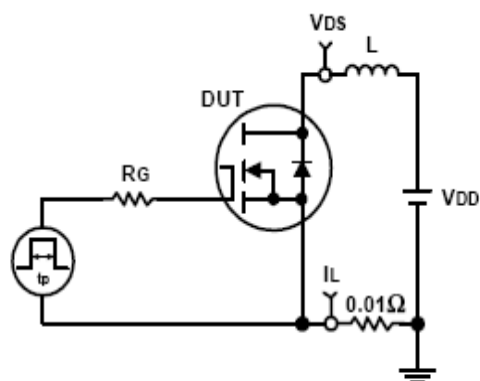

Switching Time Test Circuit and Waveforms

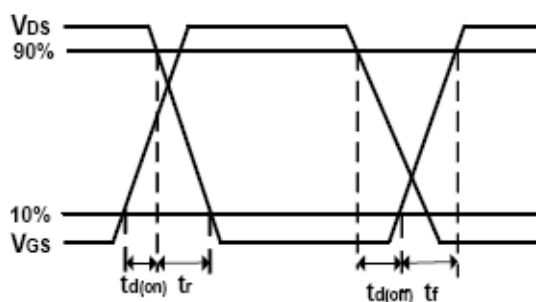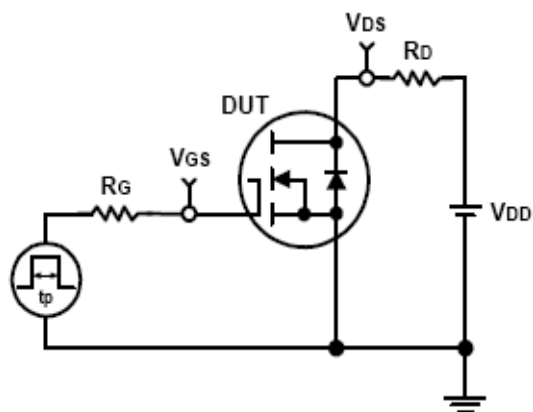


Ordering and Marking Information

Device	Marking	Package	Packaging	Quantity	Reel Size	Tape width
RU7550S	RU7550S	TO-263	Tube	50	-	-

Package Information

TO-263-2L

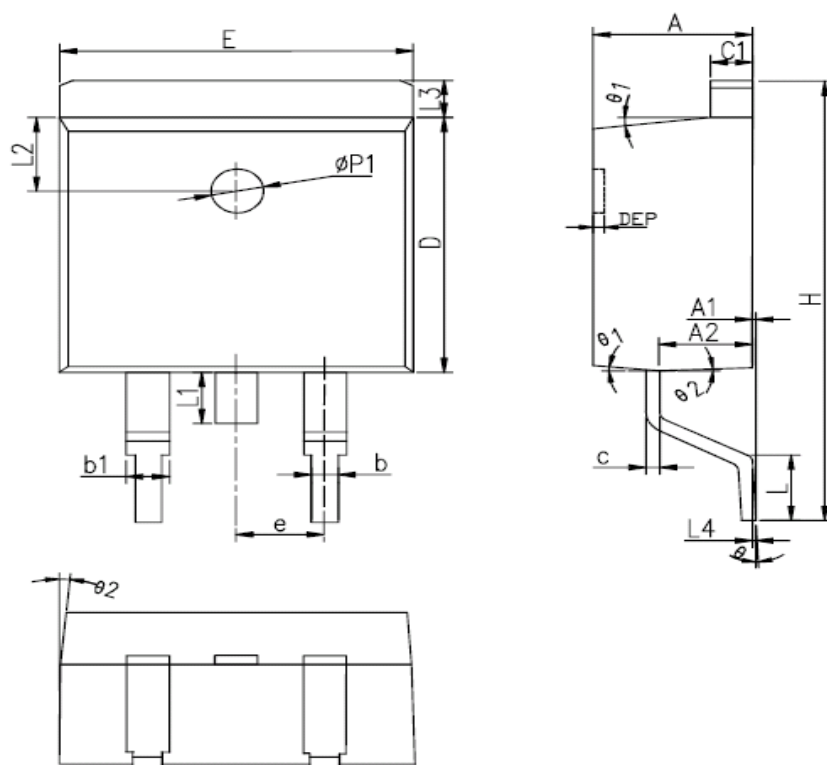

SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
A	4.40	4.57	4.70	0.173	0.180	0.185	L	2.00	2.30	2.60	0.079	0.090	0.102
A1	0	0.10	0.25	0	0.004	0.010	L3	1.17	1.27	1.40	0.046	0.050	0.055
A2	2.59	2.69	2.79	0.102	0.106	0.110	L1	-	-	1.70	-	-	0.067
b	0.77	-	0.90	0.030	-	0.035	L4	0.25BSC			0.01BSC		
b1	1.23	-	1.36	0.048	-	0.052	L2	2.50REF.			0.098REF.		
c	0.34	-	0.47	0.013	-	0.019	θ	0°	-	8°	0°	-	8°
C1	1.22	-	1.32	0.048	-	0.052	θ 1	5°	7°	9°	5°	7°	9°
D	8.60	8.70	8.80	0.338	0.343	0.346	θ 2	1°	3°	5°	1°	3°	5°
E	10.00	10.16	10.26	0.394	0.4	0.404	DEP	0.05	0.10	0.20	0.002	0.004	0.008
e	2.54BSC			0.1BSC			Øp1	1.40	1.50	1.60	0.055	0.059	0.063
H	14.70	15.10	15.50	0.579	0.594	0.610							

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Customer Service

Worldwide Sales and Service:

Sales@ruichips.com

Technical Support:

Technical@ruichips.com

Investor Relations Contacts:

Investor@ruichips.com

Marcom Contact:

Marcom@ruichips.com

Editorial Contact:

Editorial@ruichips.com

HR Contact:

HR@ruichips.com

Legal Contact:

Legal@ruichips.com

Shen Zhen RUICHIPS Semiconductor CO., LTD

Room 501, the 5floor An Tong Industrial Building,
NO.207 Mei Hua Road Fu Tian Area Shen Zhen City, CHINA

TEL: (86-755) 8311-5334

FAX: (86-755) 8311-4278

E-mail: Sales-SZ@ruichips.com