


Features

- $V_{RRM} = 50V$
 $I_{F(AV)} = 15A$
- HEBR® Technology
- Ultra-Low Forward Voltage Drop
- Low Power Loss and High Efficiency
- High Surge Capability
- Low Leakage Current
- Lead Free and Green Devices Available

Applications

- Rectifiers in SMPS
- Free Wheeling Diode
- DC-DC Converters

Pin Description

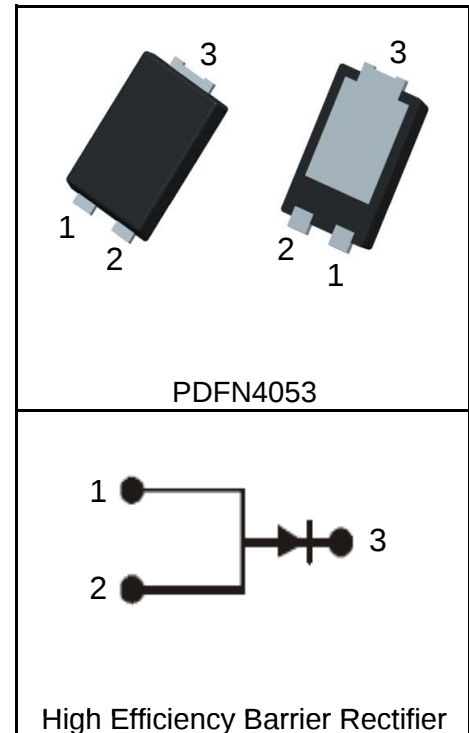

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings ($T_A = 25^\circ C$ Unless Otherwise Noted)			
$V_{RRM}^{①}$	Maximum Repetitive Reverse Voltage	50	V
$V_R^{①}$	Maximum DC Reverse Voltage	50	V
$V_{R(RMS)}^{①}$	RMS Reverse Voltage	35	V
$I_{F(AV)}$	Average Rectified Forward Current, $T_C = 130^\circ C$	15	A
I_{FSM}	Peak Forward Surge Current, 8.3ms Half Sine Wave	250	A
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$
Mounted on Large Heat Sink			
$R_{\theta JC}$	Thermal Resistance-Junction to Case	1.4	$^\circ C/W$
$R_{\theta JA}^{②}$	Thermal Resistance-Junction to Ambient	35	$^\circ C/W$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)






Symbol	Parameter	Test Condition	RUS5015M6			Unit
			Min.	Typ.	Max.	
Static Characteristics						
$V_{(BR)R}^{③}$	Reverse Breakdown Voltage	$I_R=300\mu A$	50			V
$I_R^{③}$	Reverse Leakage Current	$V_R=50V, T_C=25^{\circ}C$		100	300	μA
		$V_R=50V, T_C=125^{\circ}C$			5	mA
$V_F^{③}$	Forward Voltage Drop	$I_F=2A, T_C=25^{\circ}C$		0.3	0.34	V
		$I_F=5A, T_C=25^{\circ}C$		0.35	0.42	V
		$I_F=10A, T_C=25^{\circ}C$		0.4	0.46	V
		$I_F=15A, T_C=25^{\circ}C$		0.44	0.49	V
		$I_F=15A, T_C=125^{\circ}C$		0.39	0.45	V

- Notes:
- ① For $T_A > 25^{\circ}\text{C}$ the derating of V_R and I_F has to be considered.
 - ② Polyimide PCB, 2oz. Copper. Cathode pad dimensions 18.8mm x 14.4mm. Anode pad dimensions 5.6mm x 14.4mm.
 - ③ Pulse test, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

Ordering and Marking Information


Device	Marking	Package	Packaging	Quantity	Reel Size	Tape width
RUS5015M6	S5015	PDFN4053	Tape&Reel	3000	13"	16mm

Typical Characteristics

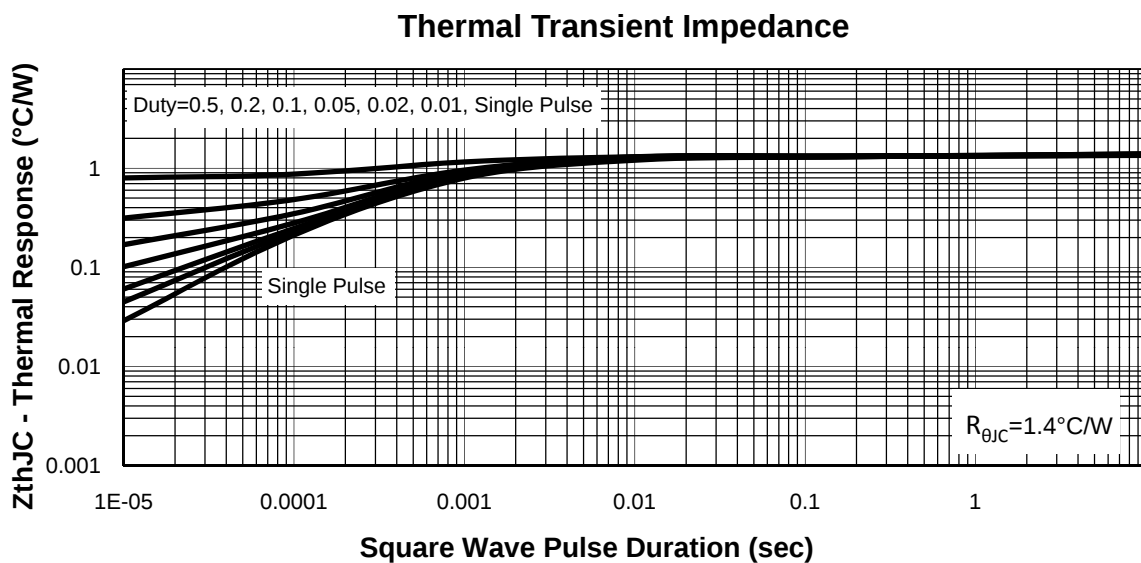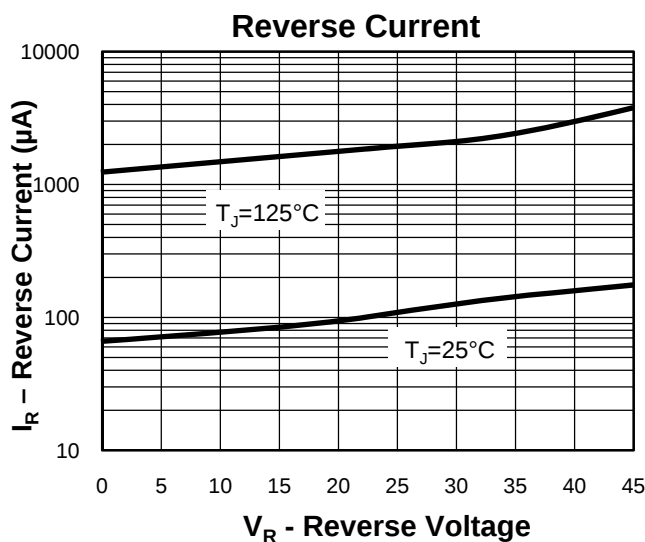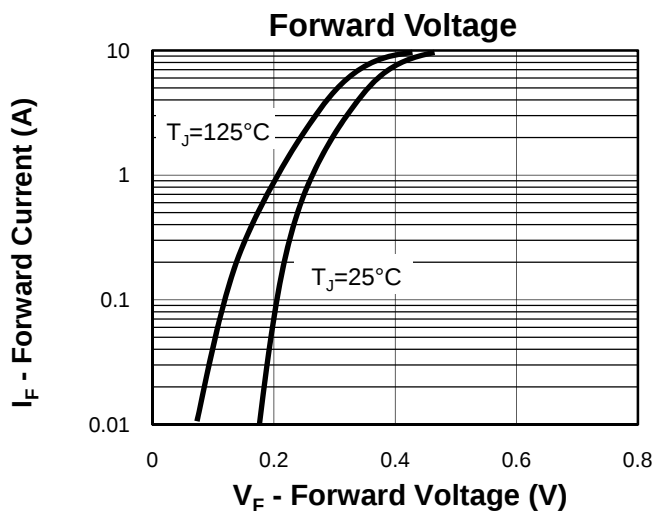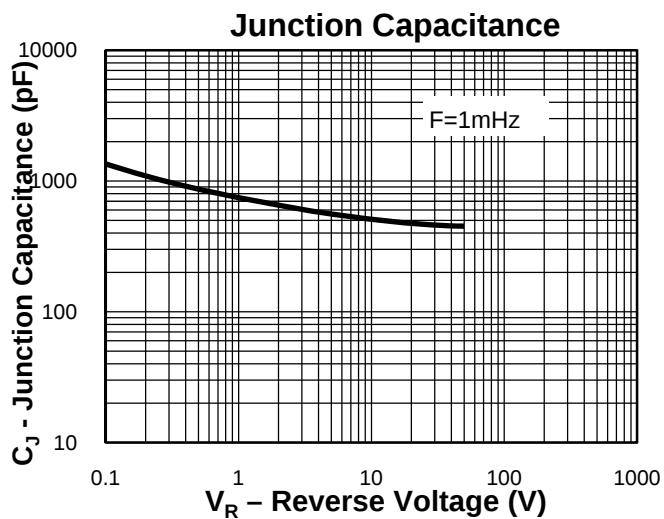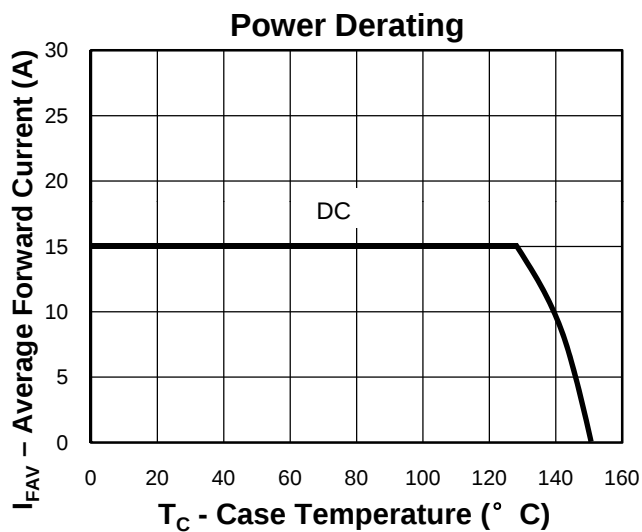

Package Information

PDFN4053

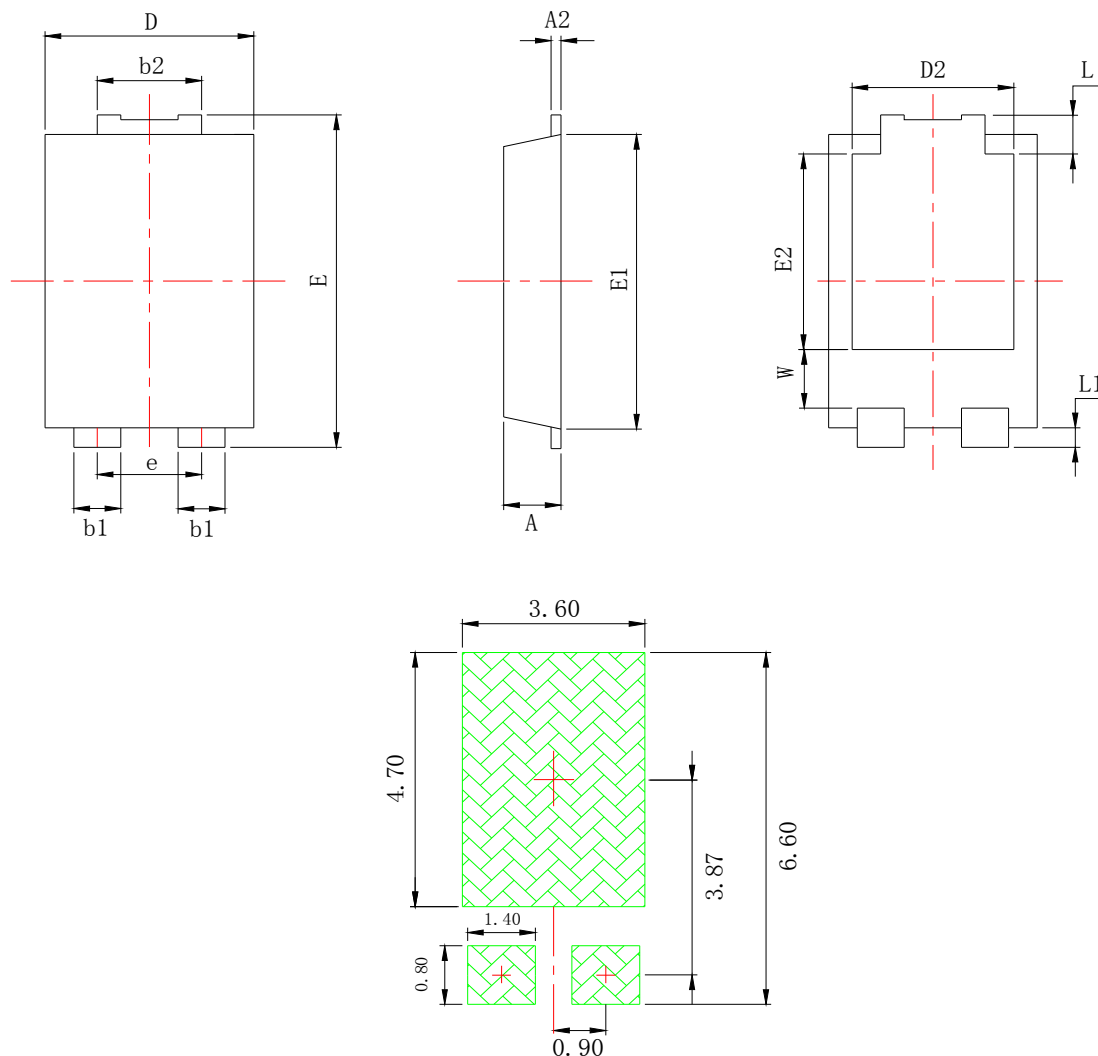

Land Pattern
(Only for Reference)

SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.10	1.20	1.30	0.043	0.047	0.051
A2	0.20	0.25	0.30	0.008	0.010	0.012
b1	0.80	0.90	1.00	0.031	0.035	0.039
b2	1.70	1.80	1.90	0.067	0.071	0.075
D	3.85	3.95	4.05	0.152	0.156	0.159
D2	*	3.05 TYP	*	*	0.12 TYP	*
E	6.30	6.40	6.50	0.248	0.252	0.256
e	*	1.84 TYP	*	*	0.072 TYP	*
E1	5.20	5.30	5.40	0.205	0.209	0.213
E2	3.40	3.50	3.60	0.134	0.138	0.142
L	0.65	0.80	0.95	0.026	0.031	0.037
L1	0.50	0.60	0.70	0.020	0.024	0.028
W	1.10	1.30	1.50	0.043	0.051	0.059

Customer Service

Worldwide Sales and Service:

Sales@ruichips.com

Technical Support:

Technical@ruichips.com

Investor Relations Contacts:

Investor@ruichips.com

Marcom Contact:

Marcom@ruichips.com

Editorial Contact:

Editorial@ruichips.comm

HR Contact:

HR@ruichips.com

Legal Contact:

Legal@ruichips.com

Shen Zhen RUICHIPS Semiconductor CO., LTD

Room 501, the 5floor An Tong Industrial Building,
NO.207 Mei Hua Road Fu Tian Area Shen Zhen City, CHINA

TEL: (86-755) 8311-5334

FAX: (86-755) 8311-4278

E-mail: Sales-SZ@ruichips.com