

RYC9901

Multi-LED Boost

GENERAL DESCRIPTION

The RYC9901 device is a low-cost integrated boost converter IC specifically designed for driving multi-LED arrays. It can be operated from a single Lithium cell or two alkaline cells, and drives up to 7 LEDs. All LEDs are in series, and the RYC9901 device regulates at constant current, yielding uniform illumination. The RYC9901 device features an active low enable/ dimming pin and thermal protection, and is available in a space-saving SOT-23-6 package.


FEATURES

- Constant current regulation
- Up to 700mW output power
- 1.9V to 5.5V input voltage range
- 25V maximum output voltage
- 1 μ A maximum shutdown current
- SOT-23-6 package

APPLICATIONS

- Backlight for LCD panels
- Cellular telephones
- Handy Terminals
- PDAs
- Portable lighting
- Battery-powered backlight applications

TYPICAL APPLICATION SCHEMATIC

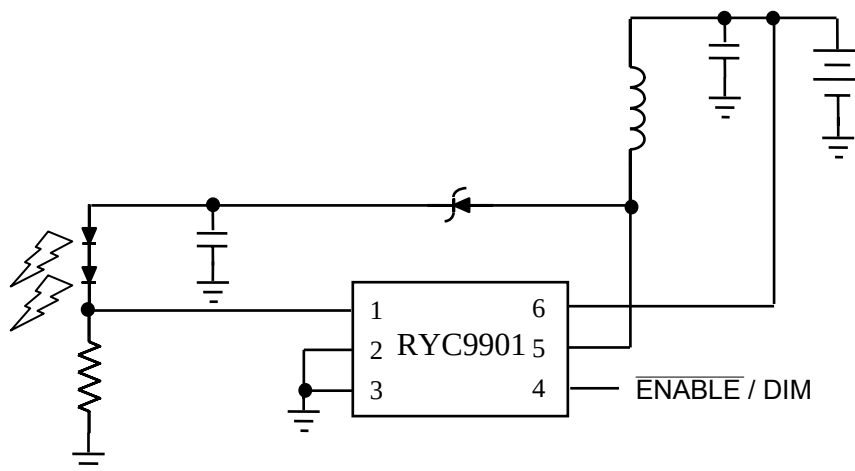

RYC9901

Multi-LED Boost

ORDERING INFORMATION

Part Description	Part Number	Package	Tape and Reel Quantity
RYC9901	E67308-000	SOT-23(6L)	2,500 pcs

MATERIALS INFORMATION

ROHS Compliant

Directive 2002/95/EC
Compliant


ELV Compliant

Directive 2000/53/EC
Compliant


Pb-Free



PIN CONFIGURATION

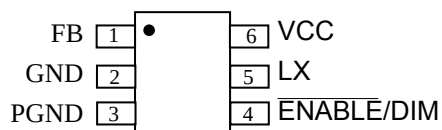


DEVICE MARKING

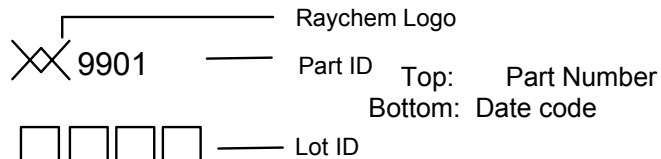

PIN DESCRIPTION

Pin Number	Pin Name	Pin Function
1	FB	Feedback: This pin is the feedback to the PWM to control the output current. Attach to a current sense resistor.
2	GND	Ground.
3	PGND	Power Ground.
4	ENABLE / DIM	Enable: A logic low turns on the converter. A logic high or open turns off the converter. A PWM signal on this pin dims the output.
5	LX	Switch Node: Connection to internal power MOSFET. Attach to inductor and diode.
6	VCC	VCC. Power input to run the IC.

BLOCK DIAGRAM

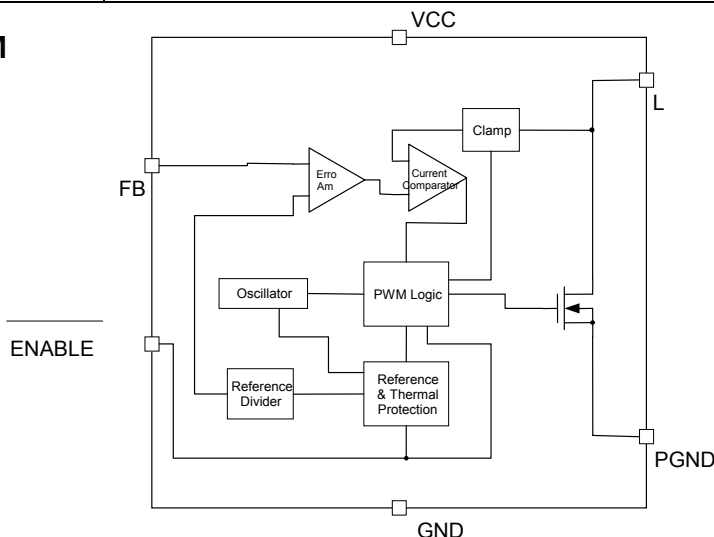

RYC9901

Multi-LED Boost

ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

Parameter	Min	Max	Units
VCC to GND	-0.3	+6.5	V
Lx to GND	-0.3	33	V
All Other Pins to GND	-0.3	VCC + 0.3	V
Continuous Power Dissipation (70°C) (Derate 5.9mW/°C above 70°C)		380	mW
Ambient operating temperature	-40	+85	°C
Storage temperature		- 65 to +150	°C
Max lead temperature during soldering (5 sec.)		260	°C

Note 1. Operation beyond absolute maximum rating or improper use may result in permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods or to conditions beyond absolute maximum rating conditions may adversely affect device reliability. Functional operation under absolute maximum rating conditions is not implied.

Note 2. Devices are ESD sensitive. Handling precautions recommended. This device is rated at HBM ±2.0 kV.

ELECTRICAL CHARACTERISTICS

(Vcc = +3.5V, TA = 25°C, using circuit in Figure 1, unless otherwise noted)

(The • denotes specifications which apply over the full operating temperature range.)


Parameters	Condition	Min	Typ	Max	Units
VCC					
Supply voltage		1.9	-----	5.5	V
Supply Current	V _{ENABLE} = 0V		150	260	μA
Disable Supply Current	V _{ENABLE} = 3.5V		0.15	0.55	μA
ENABLE					
Threshold	Low-to-High	•	1.3	1.8	V
	High-to-Low	•	1.3		V
Input Current	V _{ENABLE} = 0V	•	0.05	1	μA
	V _{ENABLE} = 3.5V	•	-0.05		
Turn-on Time			200		μs
LX					
LX Voltage				25	V
Switch Resistance			860		mΩ
Current Limit		600		1900	mA
Current Limit Temperature Variation		•	±10		%
FB					
Feedback Voltage		300	340	370	mV
Feedback Voltage Temperature Variation		•	±5		%
Other					
Switching frequency		60	85	110	kHz
Frequency Temperature Variation		•	±10		%
Maximum Duty Cycle			75		%
Thermal Shutdown			135		°C
Thermal Shutdown Hysteresis			10		°C

RYC9901


Multi-LED Boost

TYPICAL CHARACTERISTICS


Switching Waveforms, Pout = 1W

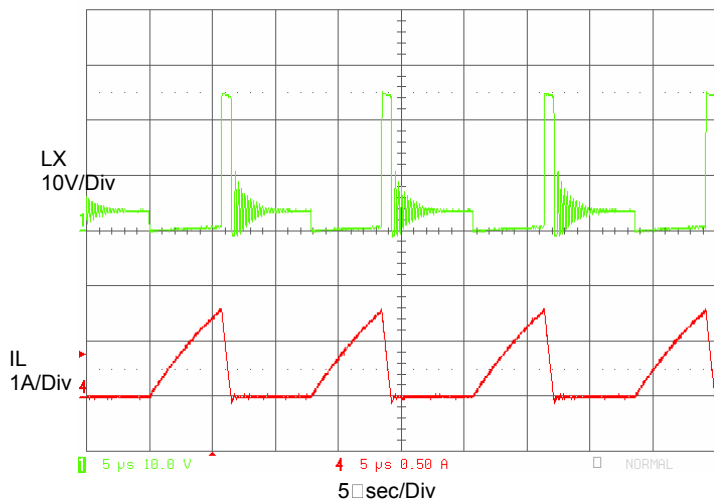


Efficiency, 1W Super-Bright White LED

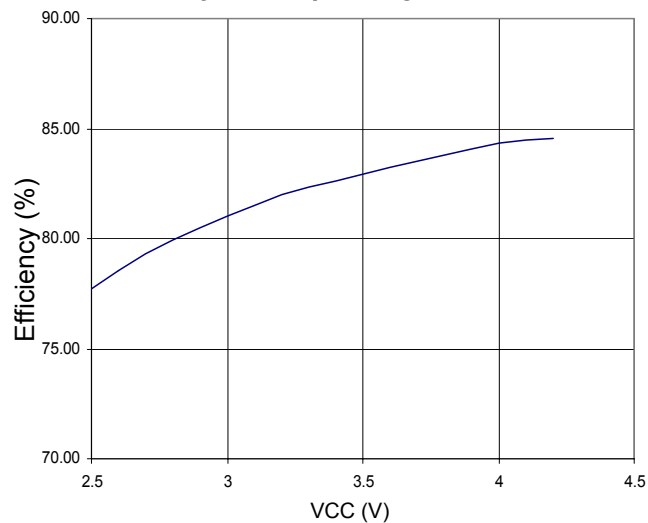

LED Current vs. Modulation

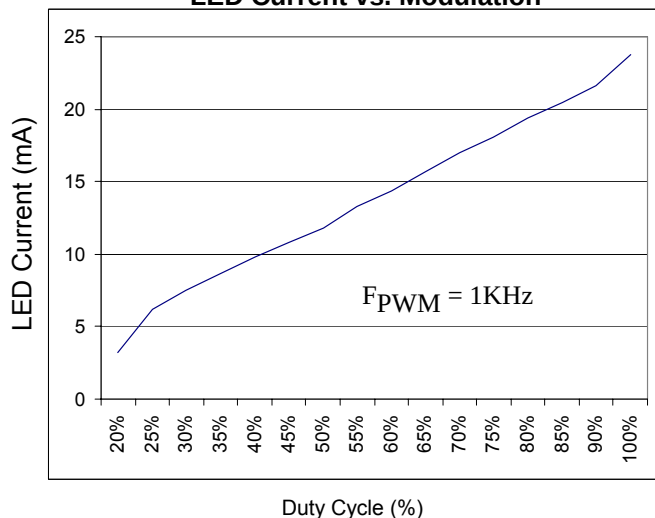

Output Current vs. Temperature

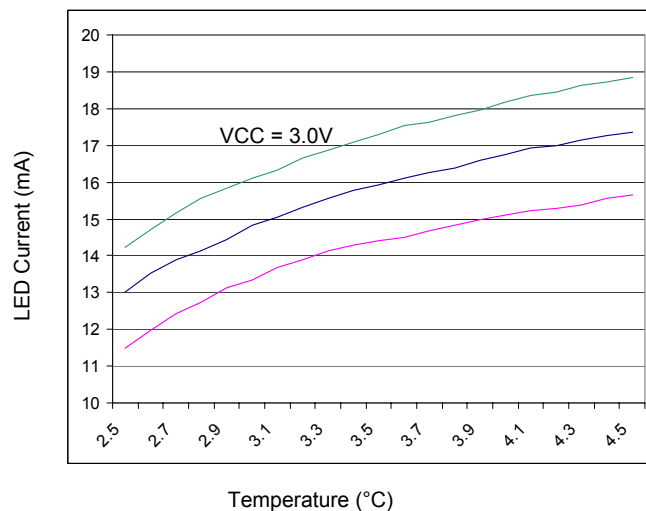


RYC9901


Multi-LED Boost

TYPICAL CHARACTERISTICS (CONT)


Frequency Normalized at 25°C

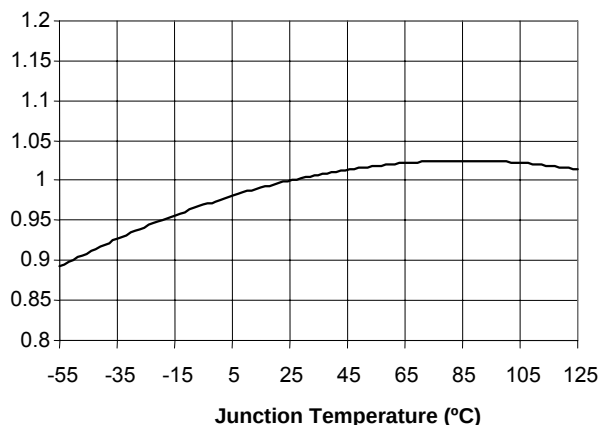


Feedback Voltage Normalized at 25°C

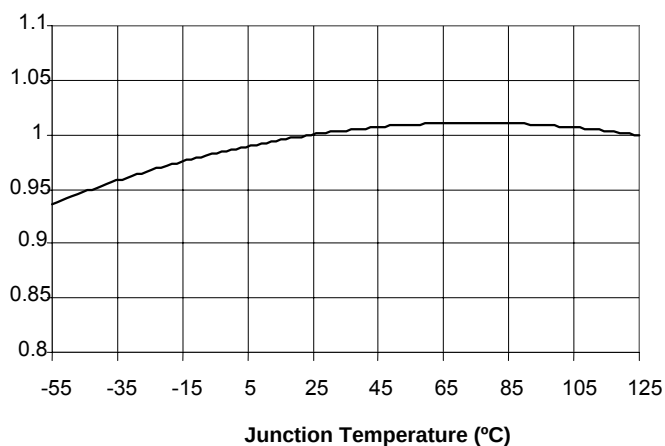

Supply Current Normalized at 25°C

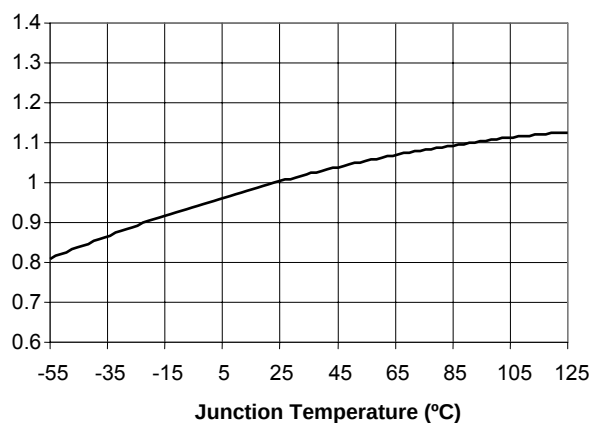


Disable Supply Current Normalized at 25°C

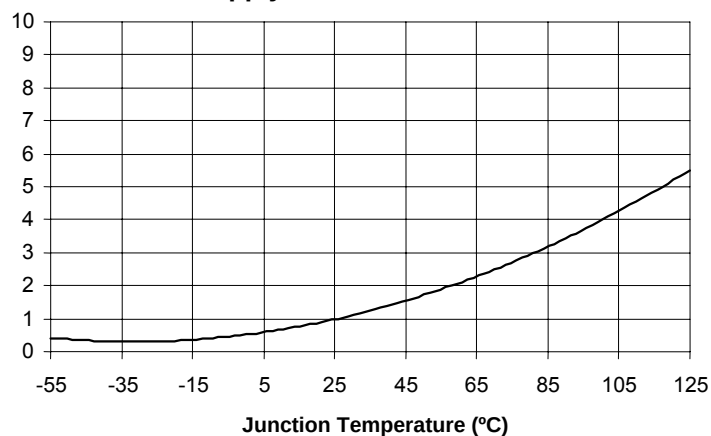

RYC9901

Multi-LED Boost

TYPICAL CHARACTERISTICS (CONT)

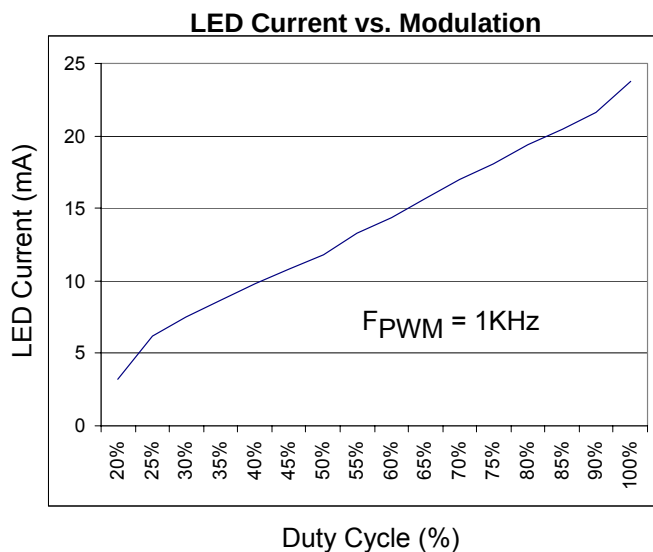

APPLICATION CIRCUIT

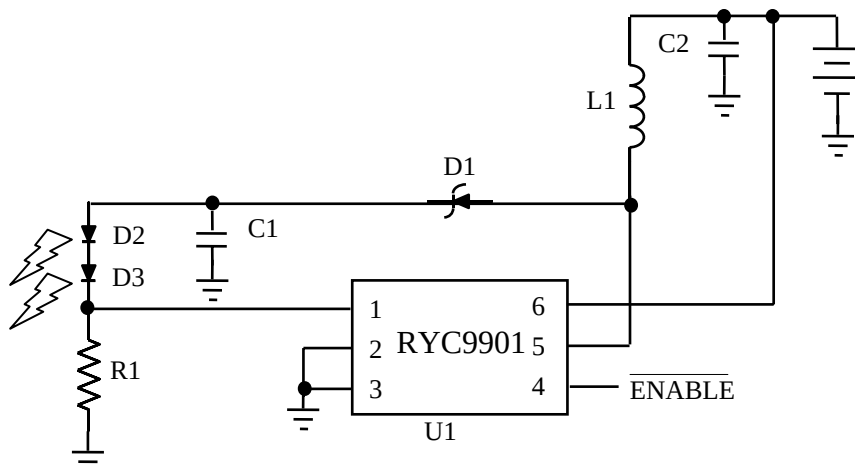


Figure X Application Circuit for Two LEDs

RYC9901

Multi-LED Boost

TABLE 1. APPLICATION BILL OF MATERIALS FOR FIGURE X

Reference	Manufacturer Example Part #	Quantity	Description	Notes
C1	Any	1	2.2 μ F, Ceramic Cap	
C2	Any	1	1 μ F, Ceramic Cap	
D1	Zetex ZHCS400	1	400mA, 40V Schottky	
D2-3	Fairchild MV8W00	2	Super-Bright White LEDs	
R1	Any	1	13.3 Ω	
L1	Coiltronics SD12-220	1	22 μ H, 635m Ω	I _{SAT} > 0.575A
U1	Raychem RYC9901	1	Multi-LED Boost IC	

RYC9901 **Multi-LED Boost**

APPLICATION INFORMATION

The RYC9901 device is a low-cost integrated boost converter IC specifically designed for driving multi-LED arrays. It can be operated from a single Lithium cell or two alkaline cells, and drives up to 7 LEDs. All LEDs are in series, and the RYC9901 device regulates at constant current, yielding uniform illumination. The RYC9901 device features an active low enable pin and thermal protection, and is available in a space-saving SOT-23-6 package

Startup

The RYC9901 device does not require a soft-start. It has a current limit on the LX pin that is designed to avoid damage to the IC even by a short circuit. At startup, then, it simply runs at maximum current until the output capacitor is charged, at which time it enters normal operation.

Normal Operation

In normal operation, the RYC9901 device is intended to be operated as a discontinuous conduction mode non-isolated flyback converter. It boosts the input voltage to another DC voltage, which then passes through the series string of LEDs and a sense resistor. The current is regulated by measuring the voltage across the sense resistor, and regulating the DC output voltage to be such that the voltage across the sense resistor is 340mV.

Input Capacitor

It may be desirable to include an input capacitor to this circuit. Even though the input to the converter is a battery, batteries have limited ability to source high-frequency currents. Thus, there may be significant voltage drops at the input unless an input capacitor is used.

The input capacitor must be rated to take the AC ripple current, which is given by:

$$I_{rms} = \sqrt{\frac{\sqrt{2}P}{3V_{in}} \left[\sqrt{LTP} \left(\frac{2}{L} + \frac{3P}{V_{in}^2 T} \right) - \frac{3\sqrt{2}P}{V_{in}} \right]}$$

with L the inductance, V_{in} the input voltage, T the period ($=12.5\mu\text{sec}$), and P the input power ($=\text{output power} / \text{efficiency}$).

As an example, using the circuit in Figure 1, suppose that $L = 10\mu\text{H}$, $V_{in} = 3\text{V}$, and input power $= 7.6\text{V} * 20\text{mA} / 85\% = 179\text{mW}$, with an assumed efficiency of 85%. We calculate that $I_{rms} = 132\text{mA}$. The input capacitor should be rated to take this ripple current in steady-state.

Output Capacitor

Typical usage will require only a $1\mu\text{F}$ ceramic capacitor at the output of the converter. If a different capacitor is necessary, the following information may be used. The output capacitor of a discontinuous conduction mode flyback converter sees high ripple current. The capacitor must be rated to take this current, which is given by:

$$I_{rms} = \sqrt{\frac{\sqrt{2}}{3} \frac{P^2}{T(V_{in} - V_{out})^3} \left[\sqrt{2}T(V_{in} - V_{out}) + \sqrt{PTL} \right]}$$

with L the inductance, V_{in} the input voltage, V_{out} the output voltage, T the period ($=10\mu\text{sec}$), and P the input power ($=\text{output power} / \text{efficiency}$).

As an example, using the circuit in Figure 1, suppose that $L = 10\mu\text{H}$, $V_{in} = 3\text{V}$, $V_{out} = 7.6\text{V}$, and input power $= 7.6\text{V} * 20\text{mA} / 85\% = 179\text{mW}$, with an assumed efficiency of 85%. We calculate that $I_{rms} = 31\text{mA}$. The output capacitor must be rated to take this ripple current in steady-state.

Bootstrap Application

Efficiency of the RYC9901 device is somewhat limited by the low voltage available on the VCC pin to drive the internal MOSFET. If a higher voltage is not available, an alternative is to bootstrap the input. As shown in Figure 2, this can be accomplished by orring together the external supply voltage with the voltage

RYC9901

Multi-LED Boost

across one of the LEDs, which latter is approximately 3.6V.

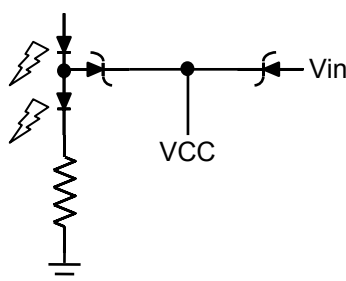


Figure 2. Bootstrapping Circuit

Enable

The RYC9901 device can be turned off by pulling the **ENABLE** pin high. In this condition, there is extremely low leakage current into the IC, and very low current into the LEDs, since the supply voltage (minus a diode drop) is much less than the forward voltage required to turn on the LEDs.

Disconnecting the LEDs in Shutdown

If it is still desired to disconnect the LEDs when the RYC9901 device is disabled, the circuit in Figure 3 may be used. When the IC is enabled, the voltage on the emitter of the PNP will be greater than the input voltage, and so the transistor will conduct current to the LEDs. When the IC is disabled, the voltage on the emitter will be a diode drop less than that on the base, and so the LEDs will be disconnected.




Figure 3. LED Disconnect Circuit

Dimming

Even with a fixed sense resistor, the RYC9901 device output current can be dimmed. There are two methods for **dimming**, either applying a PWM signal directly to the **ENABLE** pin, or else adding an analog signal to the **FB** pin.

Since the switching starts up approximately 200μsec after **ENABLE** is asserted, a low frequency PWM signal applied to the **ENABLE** pin turns the converter on and off, **dimming** the output. Since the switching is enabled by **ENABLE** low, the average output current to the LEDs will be proportional to 1 – DC, with DC the duty cycle of the PWM signal. As an example, applying a 1KHz PWM signal with high present for 700μsec, results in a light level that is (1msec – 700μsec) / 1msec = 30% of the level set by the sense resistor. It is not possible to use this method to achieve light levels higher than that set by the sense resistor. If higher light levels are desired, select a smaller sense resistor. PWM frequencies in excess of a couple of KHz are not feasible with this method.

The second method for dimming the RYC9901 device is to add in an analog signal to the **FB** pin, causing the IC to generate less current to add up to the total 340mV required on the **FB** pin. In the example shown in Figure 4, a high frequency PWM signal is integrated by an RC filter, which is then added together with the current sense signal. The resistor value is chosen with such a value that the **HIGH** voltage of the PWM is divided down to approximately 340mV by the resistor divider formed with the current sense resistor. The capacitor is chosen to filter the PWM frequency.

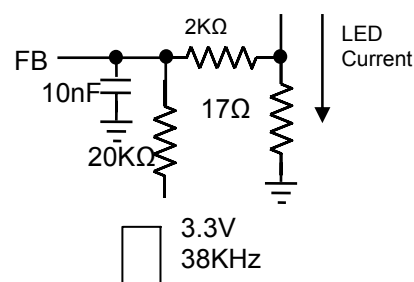


Figure 4. Dimming Circuit

Operation with a High or Low Input Voltage

If the power source available is outside the recommended operating range of the IC, the RYC9901 device can still be used to drive LEDs. To do this, the power source may be connected to the inductor, while the **VCC** pin needs to receive a small amount of current within its operating range.

RYC9901

Multi-LED Boost

In the case of a high voltage power source, the inductor may be attached directly to a voltage up to about 25V, subject to the limitations mentioned above about the nature of non-isolated flybacks. The small current needed for the VCC pin can then be generated by a low-power resistor and a zener from the high voltage source. A 5V supply is recommended.

In the case of a voltage power source below the UVLO of the IC, the inductor may still be operated from the power source. All that is required is that the small current required by the RYC9901 be made available from a higher voltage supply; a 5V supply is recommended.

Open String

If the output of the RYC9901 device is open, as might happen if the LED string fails open, the energy stored in the inductor each cycle is dissipated in the power

device of the IC. Although not recommended, the RYC9901 device is rated to take this avalanche energy, which will not damage it, for up to one minute. If the energy is sufficiently high, the RYC9901 device may go into thermal shutdown. After cooling off, it will begin operation again. This cycling should not damage the IC. The output voltage in open string may rise as high as 40V, and the output capacitor and diode should be rated to withstand this voltage in this mode. Alternatively a 30V zener may be placed in parallel with the output cap.

Thermal Shutdown




If the RYC9901 device die becomes excessively hot, the IC should shut itself down. It will then resume normal operation after cooling down sufficiently.

RYC9901



Multi-LED Boost

PACKAGE INFORMATION

DIMENSIONS (MM)			
SYMBOL	MIN	NOM	MAX
A	-	-	1.45
A1	-	-	0.15
A2	0.90	1.15	1.30
b	0.30	-	0.50
c	0.08	-	0.22
D	2.90 BSC		
E	2.80 BSC		
E1	1.60 BSC		
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	0.45	0.60
L1	0.60 REF		
θ	0°	4°	8°
R	0.10	-	0.25

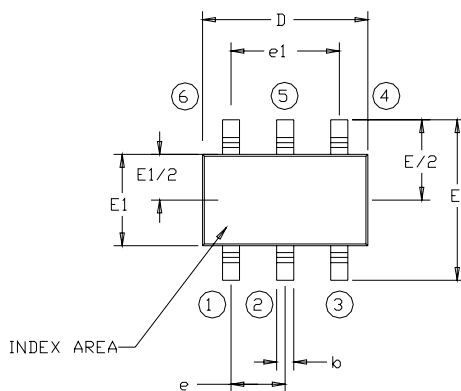

DETAIL S



SEE DETAIL S

6 Pin SOT-23 PACKAGE NOTES:

1. Dimensions and tolerance per ANSI Y14.5M-1982.
2. Dimensions A and B are datums and T is a datum surface.
3. Controlling dimensions: Millimeters
4. Dimension A and B do not include mold flash. Mold flash shall not exceed 0.15mm [0.006] per side.
5. Dimension D does not include interlead flash. Interlead flash shall not exceed 0.25 mm [0.010].

RYC9901

Multi-LED Boost

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product for their applications. Tyco Electronics Corporation assumes no responsibility for the use of its product or for any infringement of patents or other rights of third parties resulting from the use of its product. No license is granted by implication or otherwise under any patent or proprietary right of Tyco Electronics except the right to use such product for the purpose for which it is sold. Tyco Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without express written consent by an officer of Tyco Electronics, Tyco Electronics does not authorize the use of any its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Raychem is a trademark of Tyco Electronics Corporation.