


S-24CC02, S-93CC46


2-wire, 3-wire Serial E²PROM

Feature


- Low current consumption
- Wide operating voltage range
 - Read : 1.8V to 5.5V (at -40 to +85)
 - Write : 2.7V to 5.5V (at -40 to +85)
- Sequential read capable
- Endurance : 10⁶ cycles/word
- Data retention : 10 years
- Write protection area : 100% (S-24CC02A)
- Function to protect against write due to erroneous instruction recognition (S-93CC46B)
- Write inhibition function at low power voltage

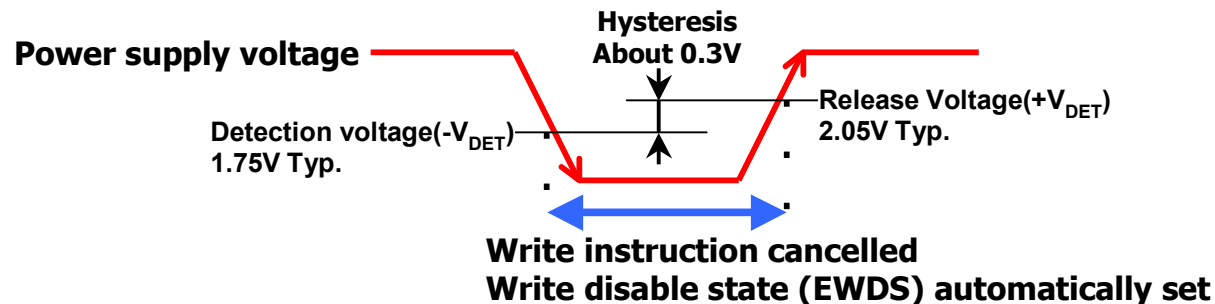

8-Pin SOP (JEDEC)
Top view

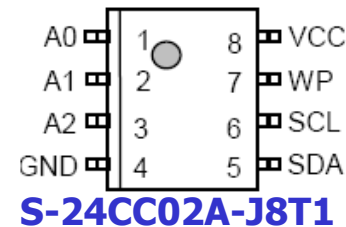

8-Pin SOP (JEDEC)
Top view

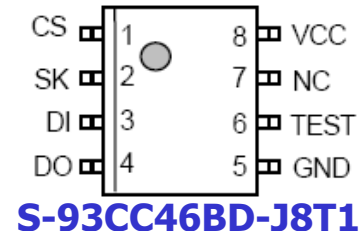

8-Pin SOP (JEDEC) (Rotated)
Top view

