



## Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1.2A

### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Lead free in comply with EU RoHS 2011/65/EU directives

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Simplified outline SOD-123FL and symbol

### MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	S15AW	S15BW	S15DW	S15GW	S15JW	S15KW	S15MW	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_a = 65^\circ C$	$I_{F(AV)}$	1.2						A	
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	40						A	
Maximum Instantaneous Forward Voltage at 1.5 A	$V_F$	1.0						V	
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Blocking Voltage $T_a = 125^\circ C$	$I_R$	1 50						$\mu A$	
Typical Junction Capacitance <sup>1)</sup>	$C_j$	4						pF	
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	60						$^\circ C/W$	
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150						$^\circ C$	

1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

2 ) P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas.



Fig.1 Forward Current Derating Curve

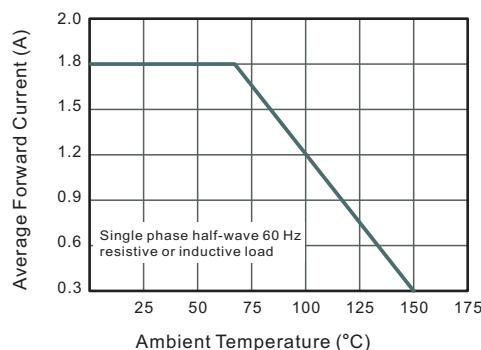


Fig.2 Typical Instantaneous Reverse Characteristics

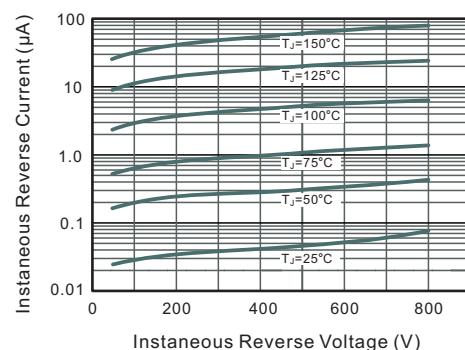


Fig.3 Typical Forward Characteristic


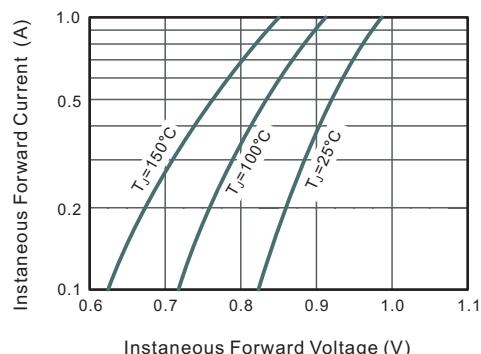


Fig.4 Typical Junction Capacitance




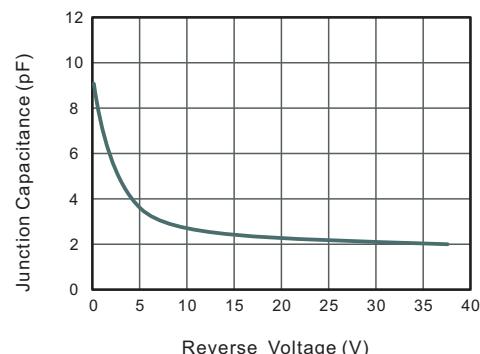


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL

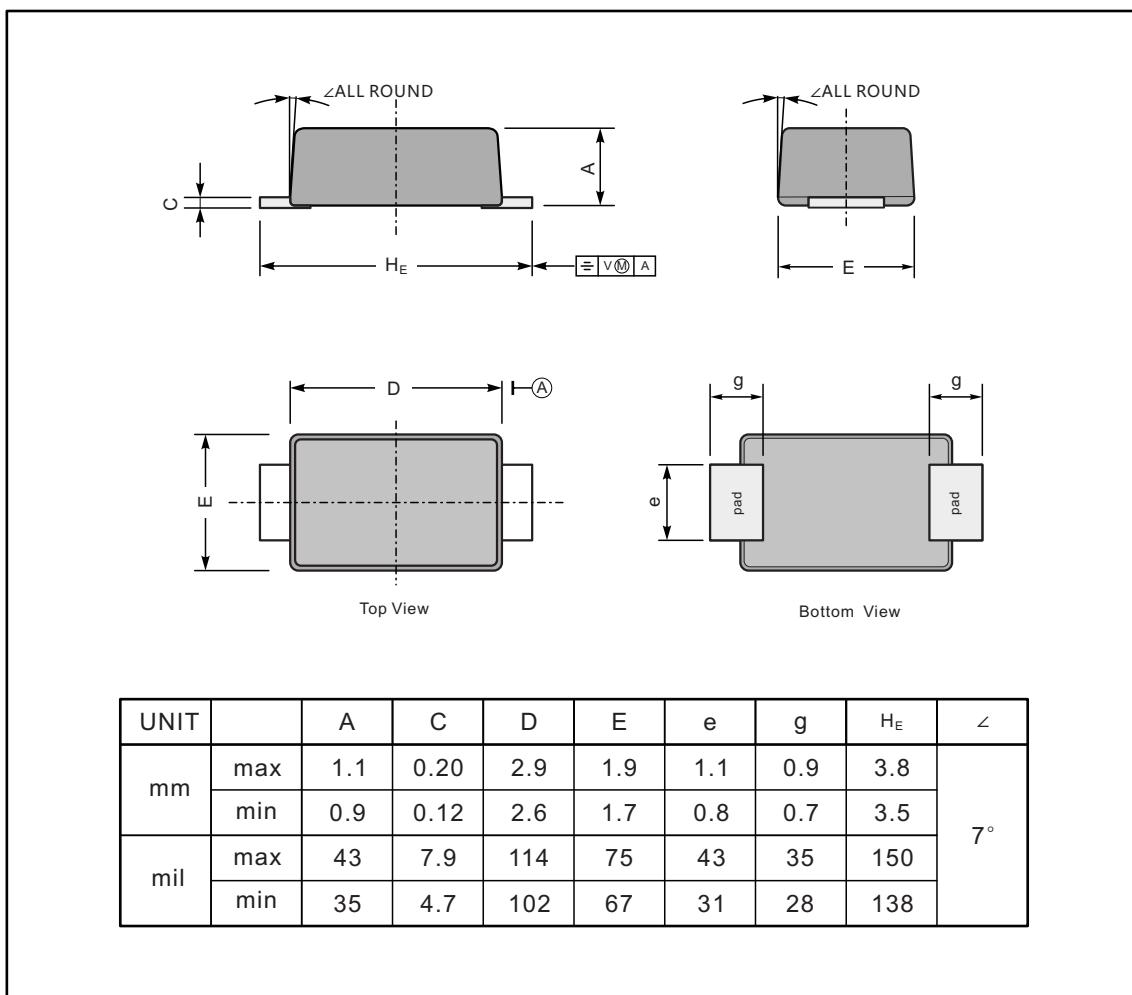

### The recommended mounting pad size

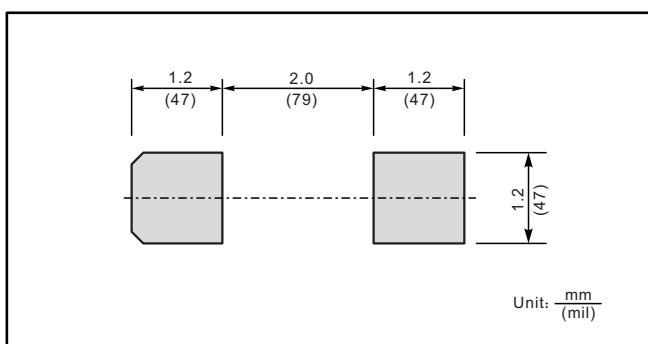

### Marking

Type number	Marking code
S15AW	S15A
S15BW	S15B
S15DW	S15D
S15GW	S15G
S15JW	S15J
S15KW	S15K
S15MW	S15M