

## Surface Mount Standard Rectifier Voltage Range 50 to 1000 V Current 2.0 Ampere

### Features


- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability
- ★ Glass passivated chip
- ★ Chips for GPP

### Mechanical Data

- ★ Case: Molded plastic SMA/DO-214AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-750 method 2026
- ★ Polarity: Color band denotes cathode end
- ★ Mounting position: Any
- ★ Weight: 0.064 gram

**SMA/DO-214AC**

Unit: inch (mm)

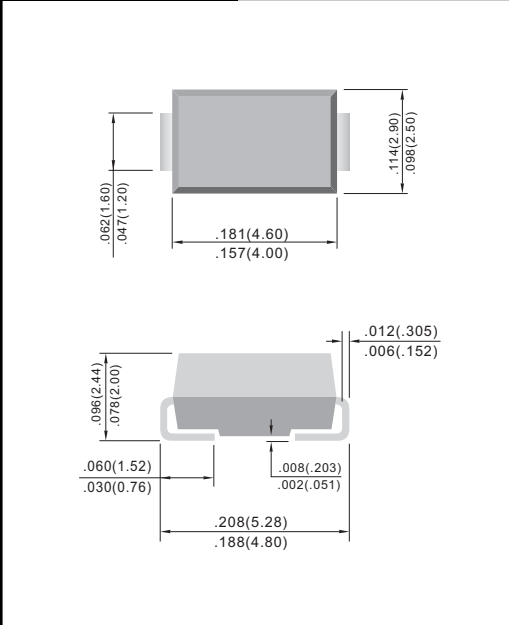

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

	SYMBOL	S2AA	S2BA	S2DA	S2GA	S2JA	S2KA	S2MA	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current TA=110°C	IAV	2.0							A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	50							A
Maximum Instantaneous Forward Voltage @ 2.0 A	VF	1.1							V
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	IR	5.0 100							uA uA
Typical junction Capacitance (Note 1)	CJ	20							pF
Typical Thermal Resistance (Note 2)	RθJA	20							°C/W
Operating Junction and Storage Temperature Range	TJ,TSTG	-55 to +150							°C

NOTES : (1) Thermal Resistance junction to ambient.  
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

FIG.1 - FORWARD CURRENT DERATING CURVE

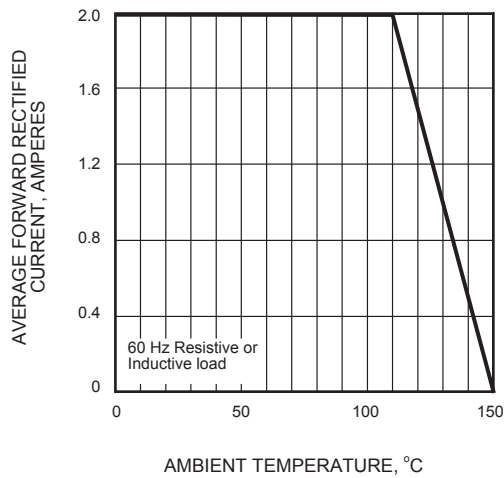


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

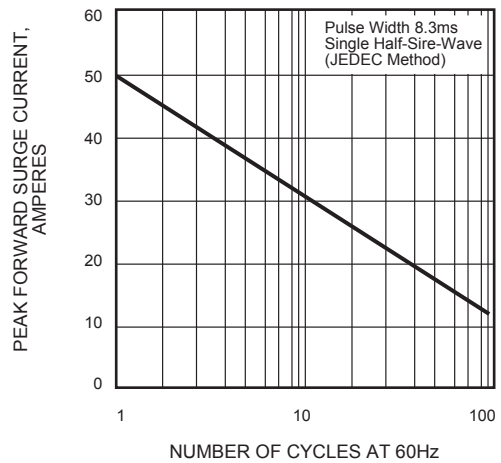


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

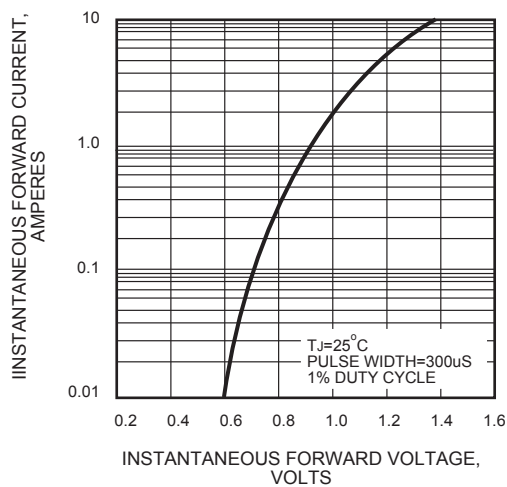


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

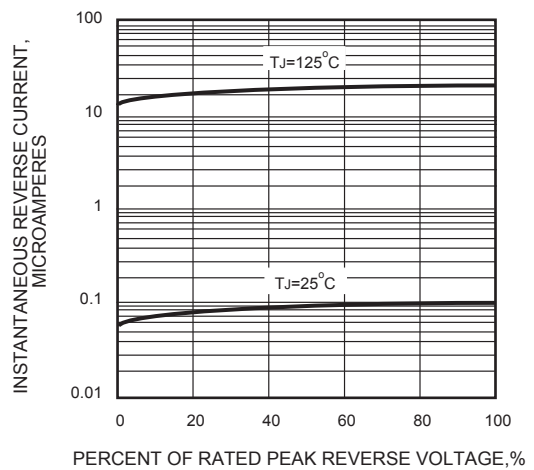


FIG.5 - TYPICAL JUNCTION CAPACITANCE

