

Description

The S358 consists of two independent high gain Internally frequency compensated operational amplifiers designed to operate from a single power supply over a wide range of voltage.

Features

- Input common mode voltage range includes ground.
- Internally frequency compensated for unity gain.
- Large DC voltage gain : 100dB
- Wide bandwidth for unity gain : 1 MHz
- Very low power consumption.
- Wide supply voltage range : Single : 3V ~ 30V, Dual : ±1.5 ~ ±15V

Applications


- Transducer amplifier.
- DC gain blocks.
- Conventional operational amplifiers.

Ordering Information

Type NO.	Marking	Package Code
S358P	S358P	DIP-8

Outline Dimensions

unit : mm

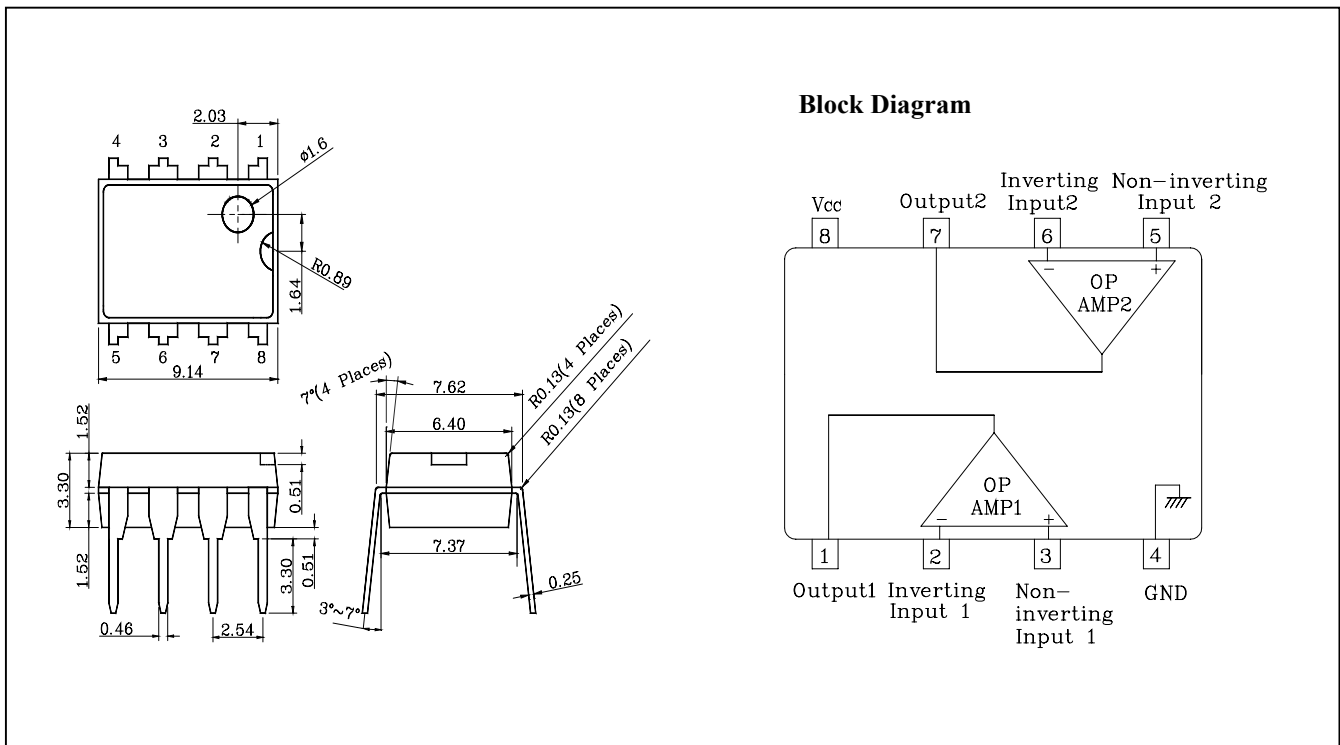

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V_{CC}	36 or ± 18	V
Differential input voltage	V_{IND}	32	V
Input voltage	V_{IN}	-0.3 ~ +32	V
Power Dissipation	P_D	570	mW
Operating temperature	T_{opr}	-45 ~ +85	°C
Storage temperature	T_{stg}	-55 ~ 150	°C

Electrical Characteristics

(Unless otherwise specified. $V_{CC} = 5V$ and $-45\text{ °C} \leq T_a \leq +85\text{ °C}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input offset voltage	V_{IOS}	$5V \leq V_{CC} \leq 30V$ (Ta=25 °C)	-	± 2	± 7	mV
		$R_g = 0\Omega, 0V \leq V_{IC} \leq V_{CC} - 1.5V$	-	-	± 9	
Input offset voltage drift	$\Delta V_{IOS}/\Delta T$	$R_g = 0\Omega$	-	7	-	$\mu V/^\circ C$
Input offset current	I_{IOS}	(Ta=25 °C)	-	± 5	± 50	nA
			-		± 150	
Input offset current drift	$\Delta I_{IOS}/\Delta T$	-	-	10	-	pA/°C
Input bias current	I_{IB}	(Ta=25 °C)	-	45	250	nA
			-	40	500	
Input common mode voltage range	V_{ICR}	$V_{CC} = 30V$ (Ta=25 °C)	0	-	$V_{CC} - 1.5$	V
			0	-	$V_{CC} - 2$	V
Supply current	I_{CC}	$V_{CC} = 30V, R_L = \infty$	-	1	2	mA
		$V_{CC} = 5V, R_L = \infty$	-	0.7	1.2	
Large signal voltage gain	G_V	$V_{CC} = 15V$ (Ta=25 °C)	25	100	-	V/mV
		$R_L \geq 2\text{ K}\Omega$	15	-	-	
Output voltage swing	V_{OH}	$V_{CC} = 30V$				V
			$R_L = 2\text{ K}\Omega$	26	-	
		$R_L = 10\text{ K}\Omega$	27	28	-	
	V_{OL}	$V_{CC} = 5V, R_L \leq 10\text{ K}\Omega$	-	3	20	mV
Common mode rejection ratio	CMRR	(Ta=25 °C)	65	90	-	dB
Power supply rejection ratio	PSRR	(Ta=25 °C)	65	100	-	dB
Output source current	I_{O+}	$V_{CC} = 15V$ (Ta=25 °C)	20	40	-	mA
		$V_{IN+} = 1V, V_{IN-} = 0V$	10	20	-	
Output sink current	I_{O-}	$V_{CC} = 15V$ (Ta=25 °C)	10	20	-	mA
		$V_{IN+} = 0V, V_{IN-} = 1V$	5	8	-	
		$V_{OUT} = 200mV,$ (Ta=25 °C) $V_{IN+} = 0V, V_{IN-} = 1V$	12	50	-	μA
Output short circuit to ground	I_{SC}	Ta=25 °C	-	40	60	mA

Electrical Characteristic Curves

Fig. 1 $I_{CC}-V_{CC}$

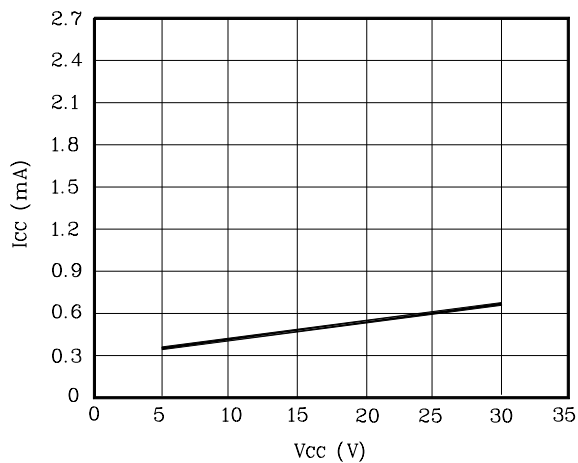


Fig. 2 $I_{IB}-V_{CC}$

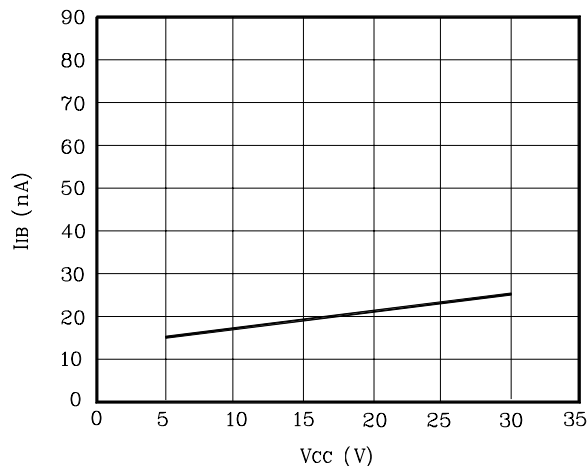


Fig. 3 $V_{IOS}-T_a$

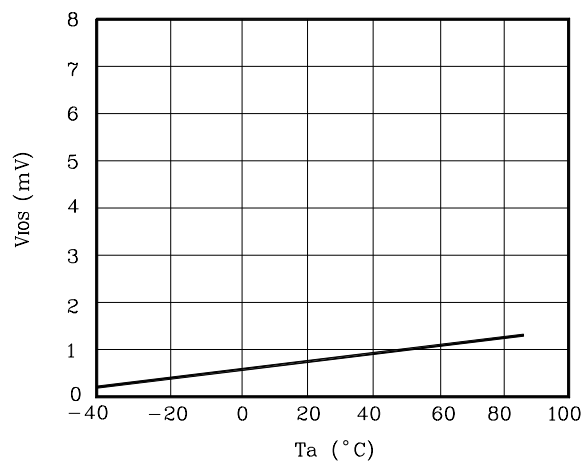


Fig. 4 I_O-T_a

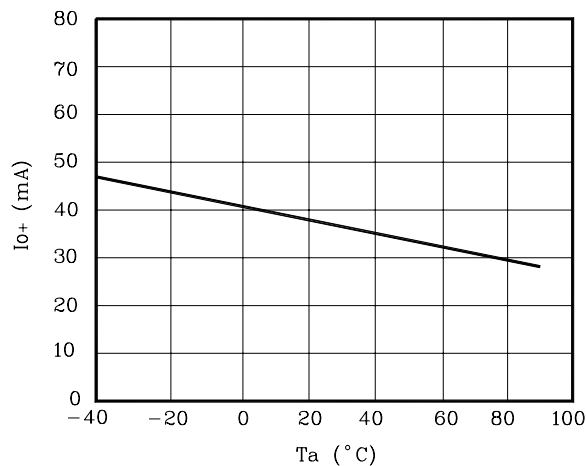


Fig. 5 CMRR-f

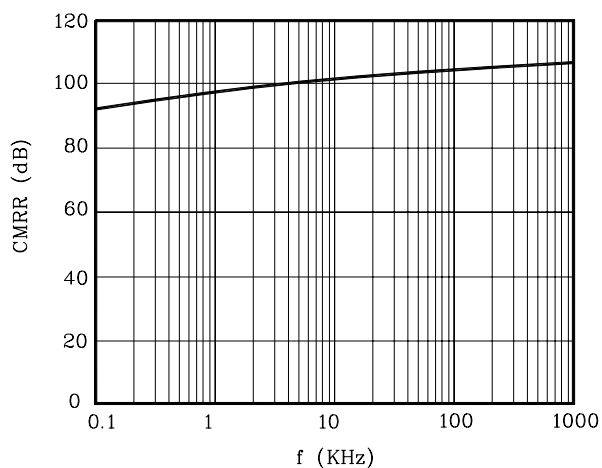


Fig. 6 $V_{OR}-f$

