



DESCRIPTION

The S3ABF~S3MBF are available in SMBF package

ORDERING INFORMATION

Package Type	Part Number
SMBF	S3ABF
	S3BBF
	S3DBF
	S3GBF
	S3JBF
	S3KBF
	S3MBF
Note	SPQ: 5,000pcs/Reel
AiT provides all RoHS Compliant Products	

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Available in SMBF package

MECHANICAL DATA

- Case: SMBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz

PIN DESCRIPTION





MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter		Symbol	S3ABF	S3BBF	S3DBF	S3GBF	S3JBF	S3KBF	S3MBF	Unit
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage		V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		V_{DC}	50	100	200	400	600	800	100	V
Maximum Average Forward Rectified Current $T_A=65^{\circ}\text{C}$		$I_{F(AV)}$	3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine wave Superimposed on Rated Load (JEDEC Method)		I_{FSM}	100							A
Maximum Instantaneous Forward Voltage at 3A		V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A=25^{\circ}\text{C}$ $T_A=125^{\circ}\text{C}$	I_R	5.0 200							μA
Typical Junction Capacitance ^{NOTE1}		C_J	45							pF
Typical Thermal Resistance ^{NOTE2}		$R_{\theta JA}$	40							$^{\circ}\text{C}/\text{W}$
Operating and Storage Temperature Range		T_J, T_{STG}	-55~+150							$^{\circ}\text{C}$

NOTE1: Measured at 1MHz and applied reverse voltage of 4V D.C

NOTE2: P.C.B. mounted with 0.5 x 0.5" (12.7 x 12.7 mm) copper pad areas.



TYPICAL CHARACTERISTICS

Figure 1. Forward Current Derating Curve

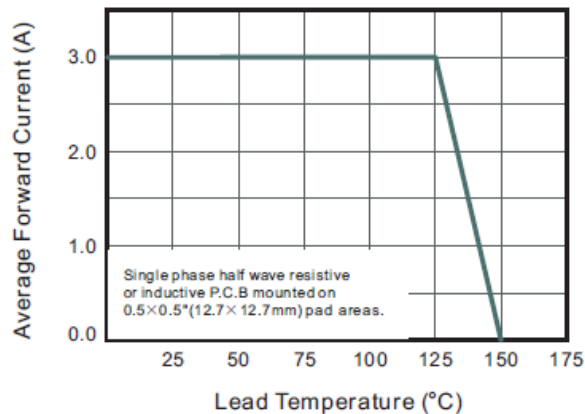


Figure 2. Typical Reverse Characteristics

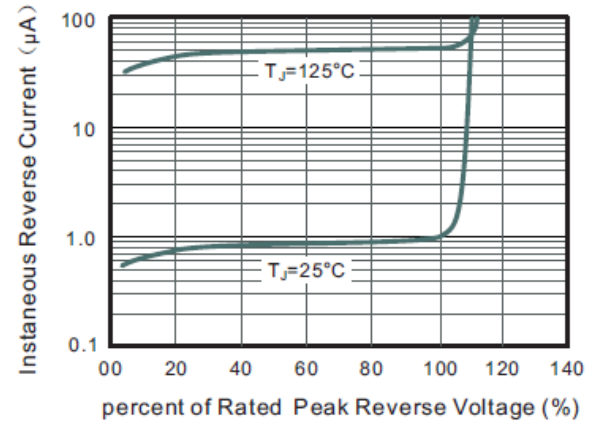


Figure 3. Typical Instantaneous Forward Characteristic

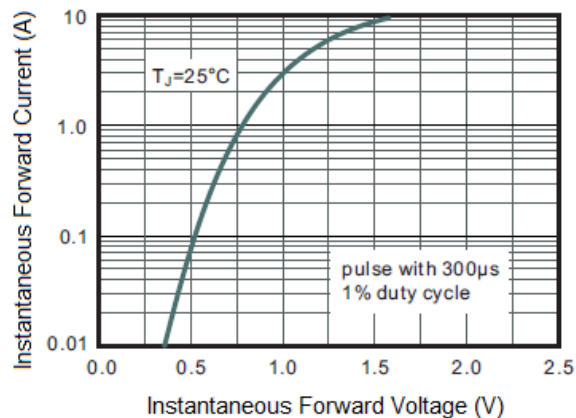


Figure 4. Typical Junction Capacitance


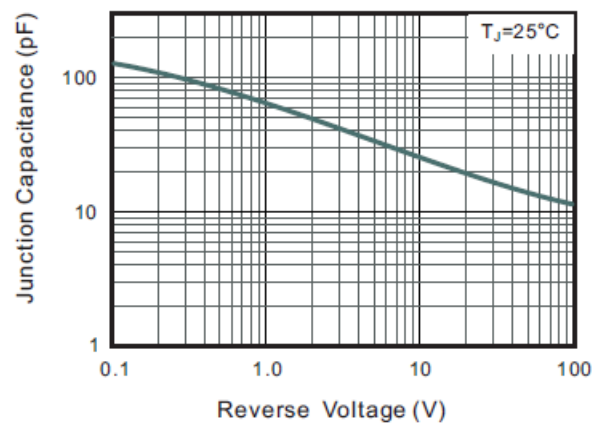


Figure 5. Maximum Non-Repetitive Peak Forward Surge Current




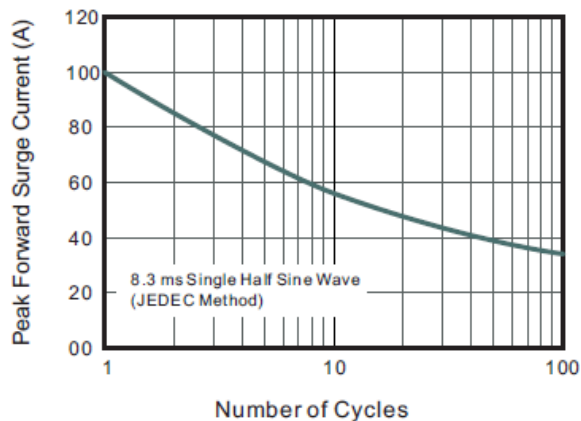


PACKAGE INFORMATION

Dimension in SMBF (Unit: mm)

Plastic Surface mounted package; 2 leads

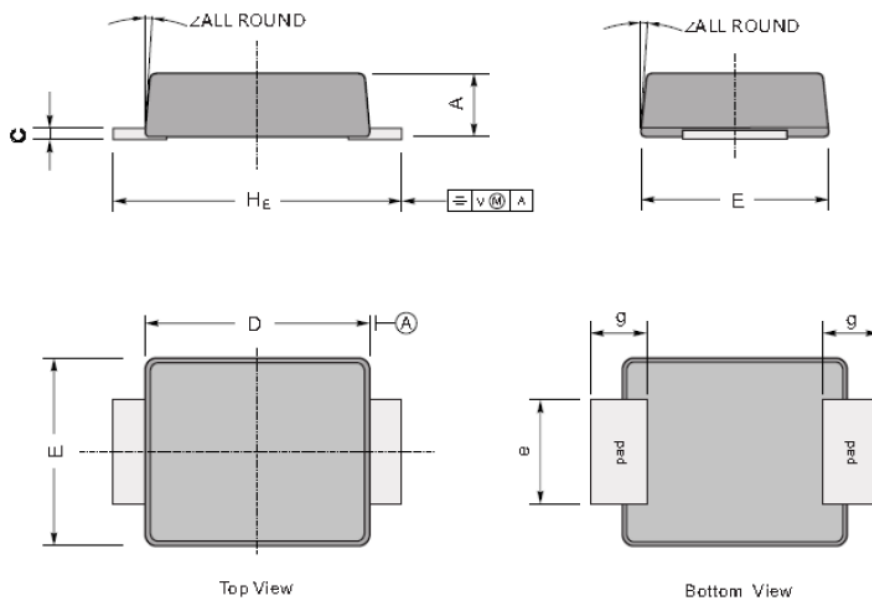

The recommended mounting pad size

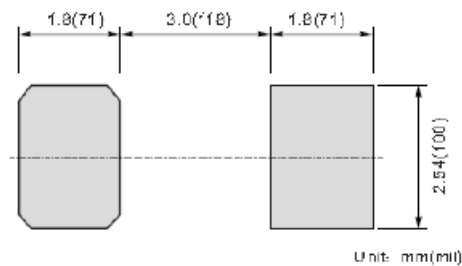

UNIT		A	C	D	E	H _E	E	g	∠
mm	Max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	Min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	Max	51	10	173	146	216	86	40	
	Min	43	7	165	138	200	75		



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.