



P/N:S5664 DATA SHEET

Feature





- Fast rise time compatible with standards.
- Through hole package available.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	OCL (uH Min)	C <sub>WW</sub> (pF Max)	L.L (uH Max)	Primary Pin	HI-POT
S5664	1:2CT	35	10	0.12	2-6	1500

Schematic

Mechanical

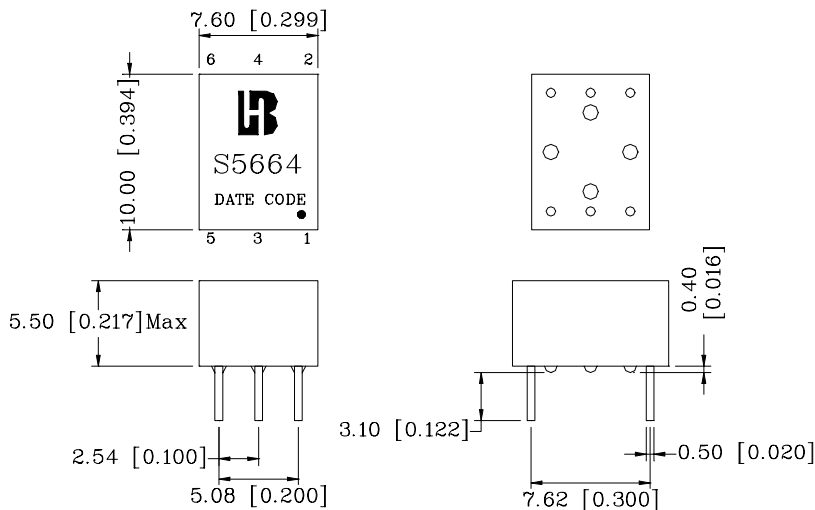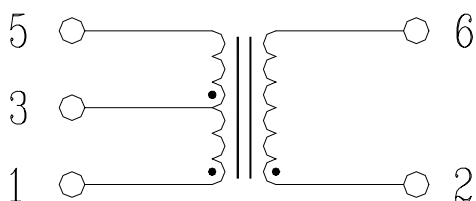

www.DataSheet4U.com

Units: mm [Inches] Tolerances: xx.x0±0.25 [0.010]

0.xx±0.05 [0.002]

www.DataSheet4U.com