

**P/N: S5778A DATA SHEET**

Page : 1/1

Feature

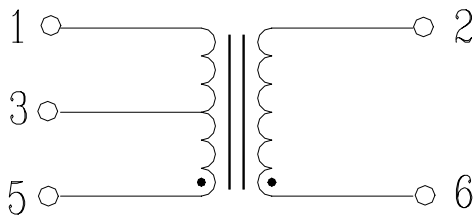
- This standard series of 6 pin DIL Line interface Modules to meet the isolation and impedance matching requirements for T1,E1,CEPT and PRI ISDN applications.
- Operating temperature of :0°C to +70°C
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

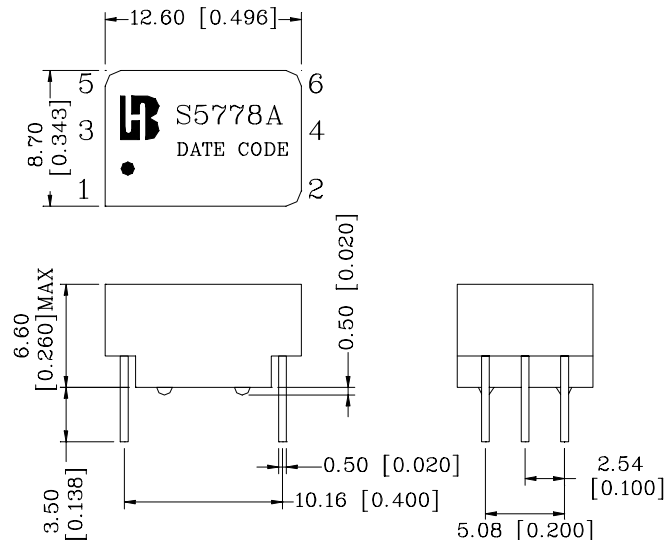
Part Number	Turns Ratio (±2%)	OCL (mH Min)	L.L (uH Max)	C _{ww} (Max pF)
S5778A	1CT:1	1.2	0.8	25

Continue

Part Number	DCR(Ω Max) PRI/SEC	PRI PINS	HI-POT (Vrms)
S5778A	0.7	1-5	1500

Schematic

www.DataSheet4U.com

Mechanical

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]

www.DataSheet4U.com