



S5AC thru S5TC



General Purpose Rectifiers Glass Passivation Junction



DO-214AB(SMC)

Primary Characteristics		
I_F	5	A
V_{RRM}	50~1300	V
I_{FSM}	125	A
V_F	1.15	V
$T_J \text{ max}$	150	°C

Features
<ul style="list-style-type: none"> • High current capability • High surge current capability • Low reverse current • Component in accordance to RoHS 2002/95/EC

Mechanical Data
<ul style="list-style-type: none"> • Cases: DO-214AB(SMC) • Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 • Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208 • Polarity: Cathode Band • Weight: 0.231 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
S5xC	General	SMC	3000 / Tape & Reel
S5xC-H	Halogen Free		
S5xC-Q	AEC-Q101 qualified		

Maximum Ratings (TA=25°C unless otherwise noted)										
PARAMETER	SYMBOL	S5AC	S5BC	S5DC	S5GC	S5JC	S5KC	S5MC	S5TC	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	910	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1300	V
Maximum average forward rectified current	I_F	5.0								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125								A
Maximum Instantaneous Forward Voltage IF=5A @ 25°C	V_F	1.15								V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	I_R	5 100								uA
Typical Junction Capacitance(NOTE1)	C_j	25								pF
Typical Thermal Resistance(NOTE2)	$R_{\theta JC}$	10								°C/W
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{STG}	-55 to +150								°C
Marking Code		S5AC	S5BC	S5DC	S5GC	S5JC	S5KC	S5MC	S5TC	

NOTES:

- 1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC
- 2.The heat sink are dimensioned as 20*70mm We clip the terminal of device by a pair of heat sink.(total 2 pc)



General Purpose Rectifiers Glass Passivation Junction

Rating and Characteristics Curvers

FIG. 1-Typical Forward Current Derating Curve

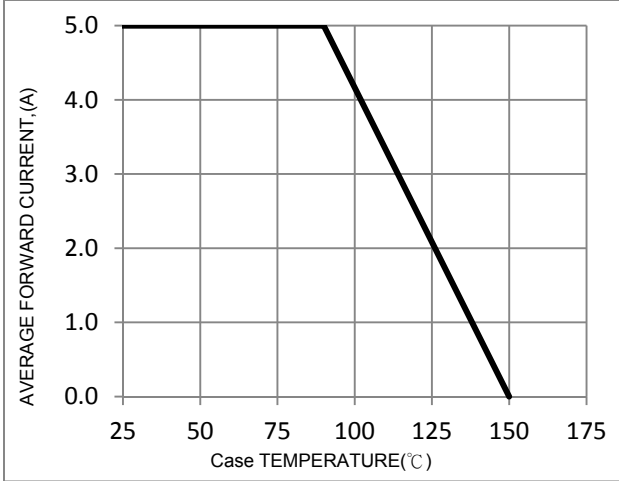


FIG. 2-Typical Forward Characteristics

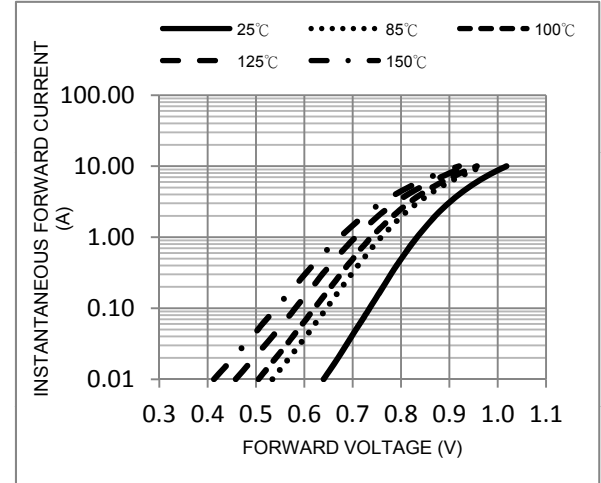


FIG. 3-Maximum Non-Repetitive Forward Surge Current

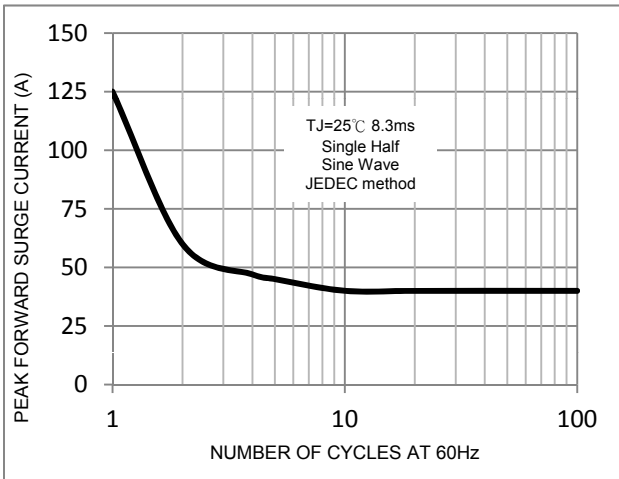


FIG. 4-Typical Reverse Characteristics


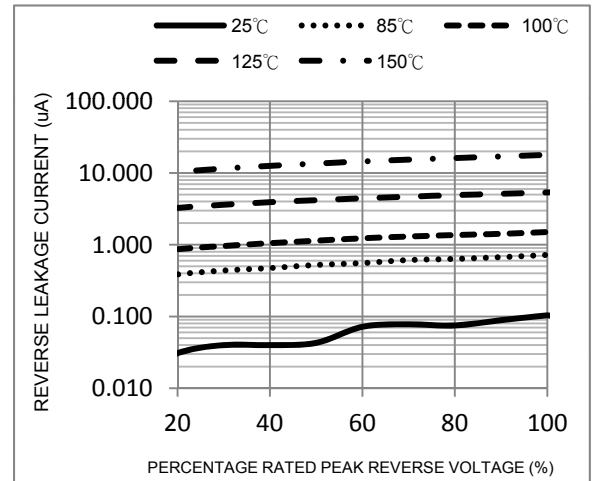


FIG. 5-Typical Junction Capacitance






S5AC thru S5TC

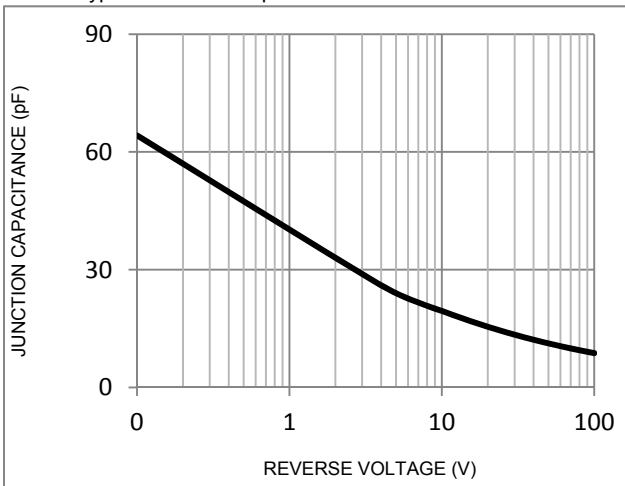

General Purpose Rectifiers Glass Passivation Junction


Package Outline Dimensions

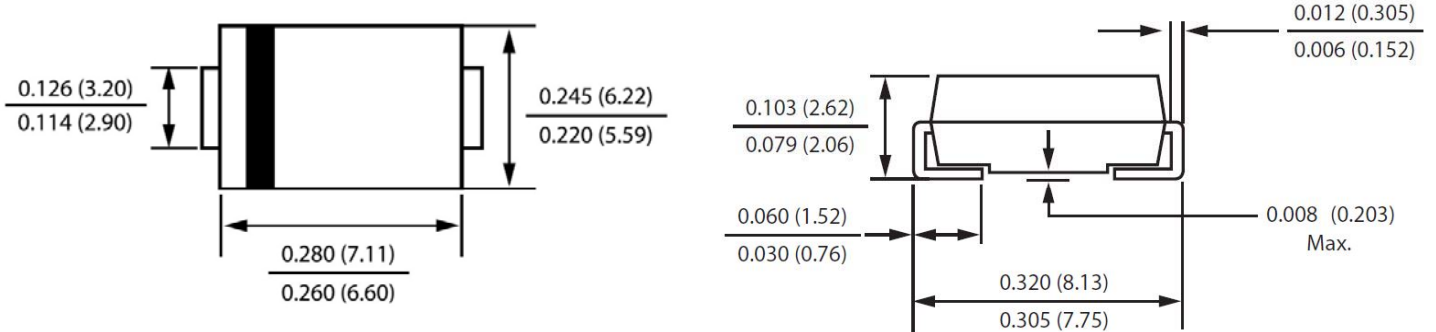

DO-214AB(SMC)


Dimensions in inches and (millimeters)

Marking Information

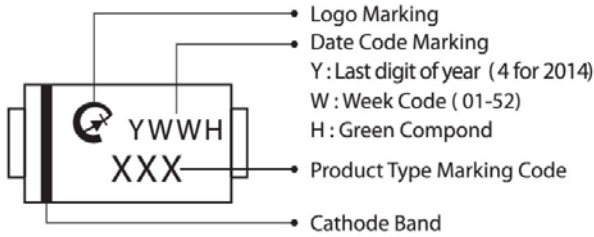

Suggested Pad Layout

Dimension	Outline	SMC (DO-214AB)
A		9.40
B		4.40
C		3.30
D		2.50
E		6.80



Tap & Reel Specification

ITEM	SYMBOL	SMC (mm)
		DO-214AB
Carrier width	A	6.3(max)
Carrier length	B	8.6(max)
Carrier depth	C	2.9(max)
Sprocket hole	d	1.50±0.1
Reel outside diameter	D	330±2.0
Feed hole diameter	D0	13.5±1
Reel inner diameter	D1	50 (min.)
Sprocket hole position	E	1.75±0.1
Punch hole position	F	7.5±0.05
Sprocket hole pitch	P	8.0±0.1
Sprocket hole pitch	Po	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.6 (max)
Tape width	W	16.0±0.3
Reel width	W2	22.4 (max)
Reel width	W1	18.4 (max)

