

SHINDENGEN


Schottky Rectifiers (SBD)

Dual

S60HC1R5

15V 60A

OUTLINE DIMENSIONS

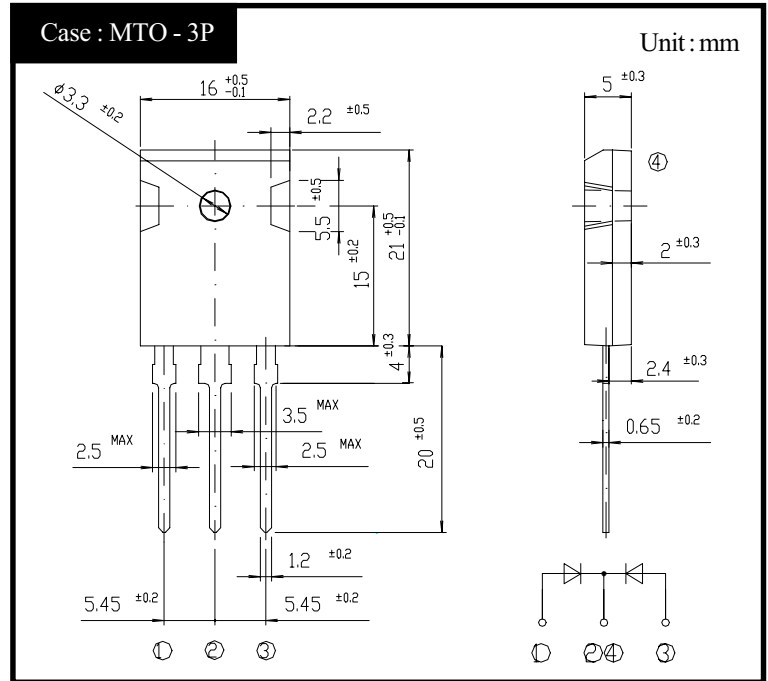

RATINGS

● Absolute Maximum Ratings ($T_c=25^{\circ}\text{C}$, unless otherwise specified)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 125	$^{\circ}\text{C}$
Operating Junction Temperature	Tj		125	$^{\circ}\text{C}$
Maximum Reverse Voltage	V _{RM}		15	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =90 $^{\circ}\text{C}$	60	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25 $^{\circ}\text{C}$	500	A
Mounting Torque	TOR	(Recommended torque : 0.5N·m)	0.8(0.5)	N·m


● Electrical Characteristics ($T_c=25^{\circ}\text{C}$, unless otherwise specified)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =30A, Pulse measurement, Rating of per diode	Max 0.41	V
Reverse Current	I _R	V _R =15V, Pulse measurement, Rating of per diode	Max 15	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V, Rating of per diode	Typ 1400	pF
Thermal Resistance	θ_{jc}	junction to case	Max 1.0	$^{\circ}\text{C/W}$

S60HC1R5


Forward Voltage

Pulse measurement per diode

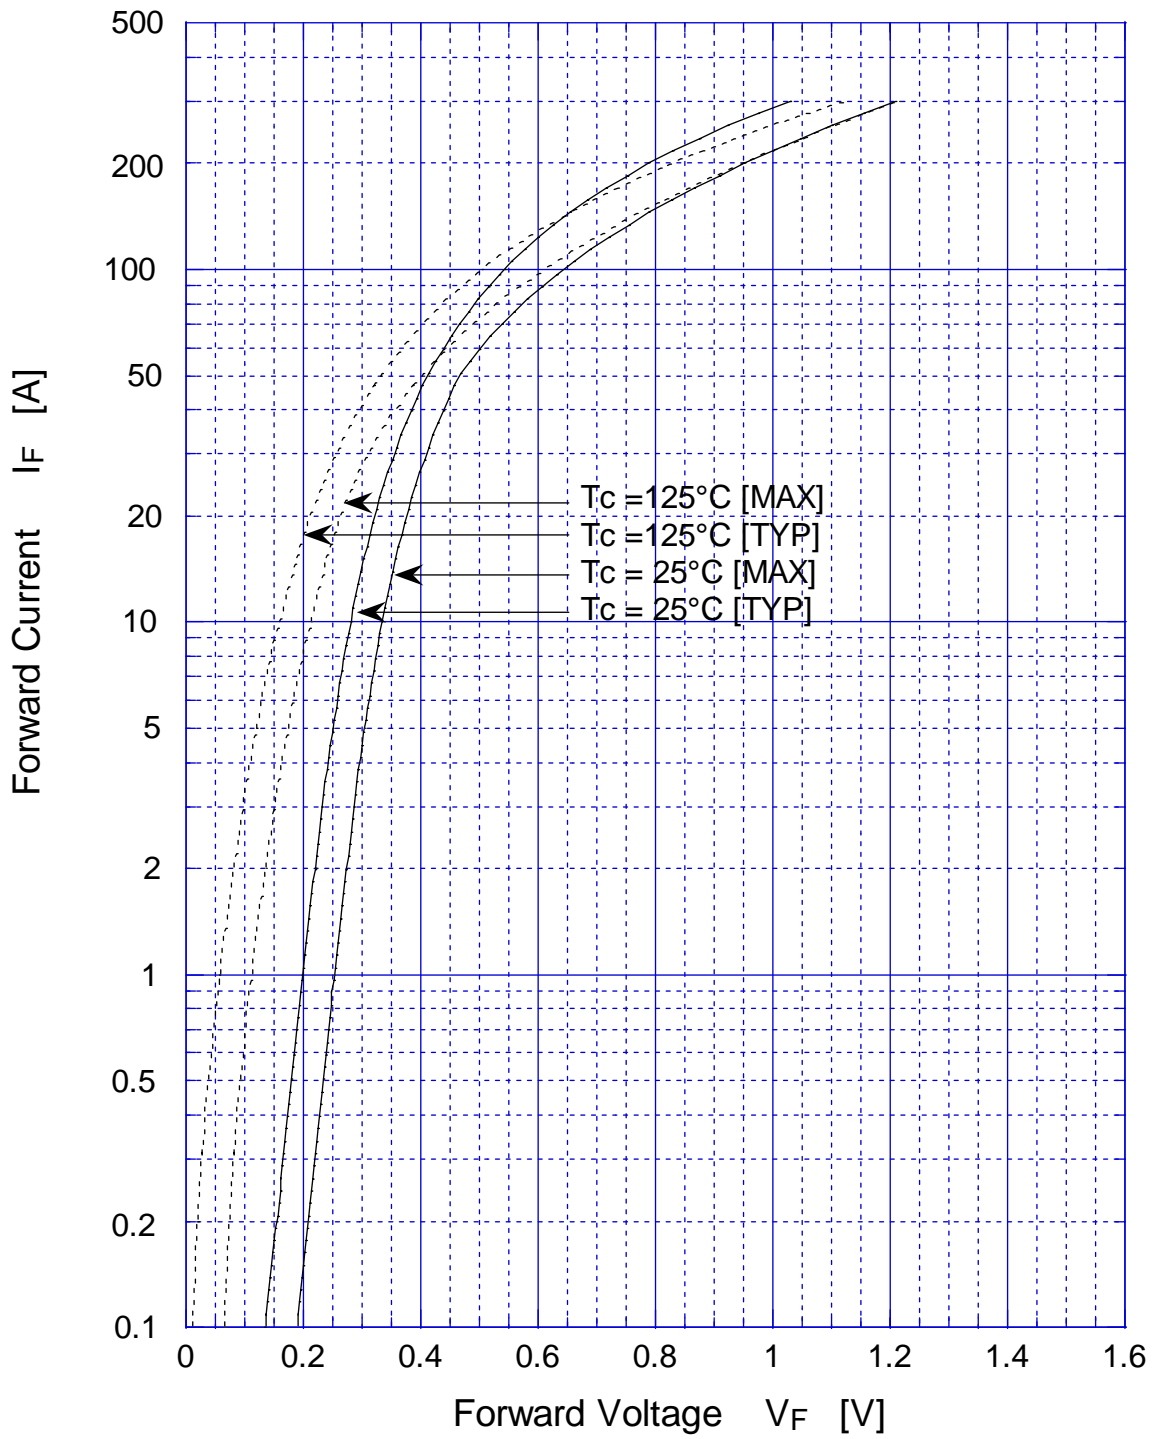


S60HC1R5 Reverse Current


Pulse measurement per diode

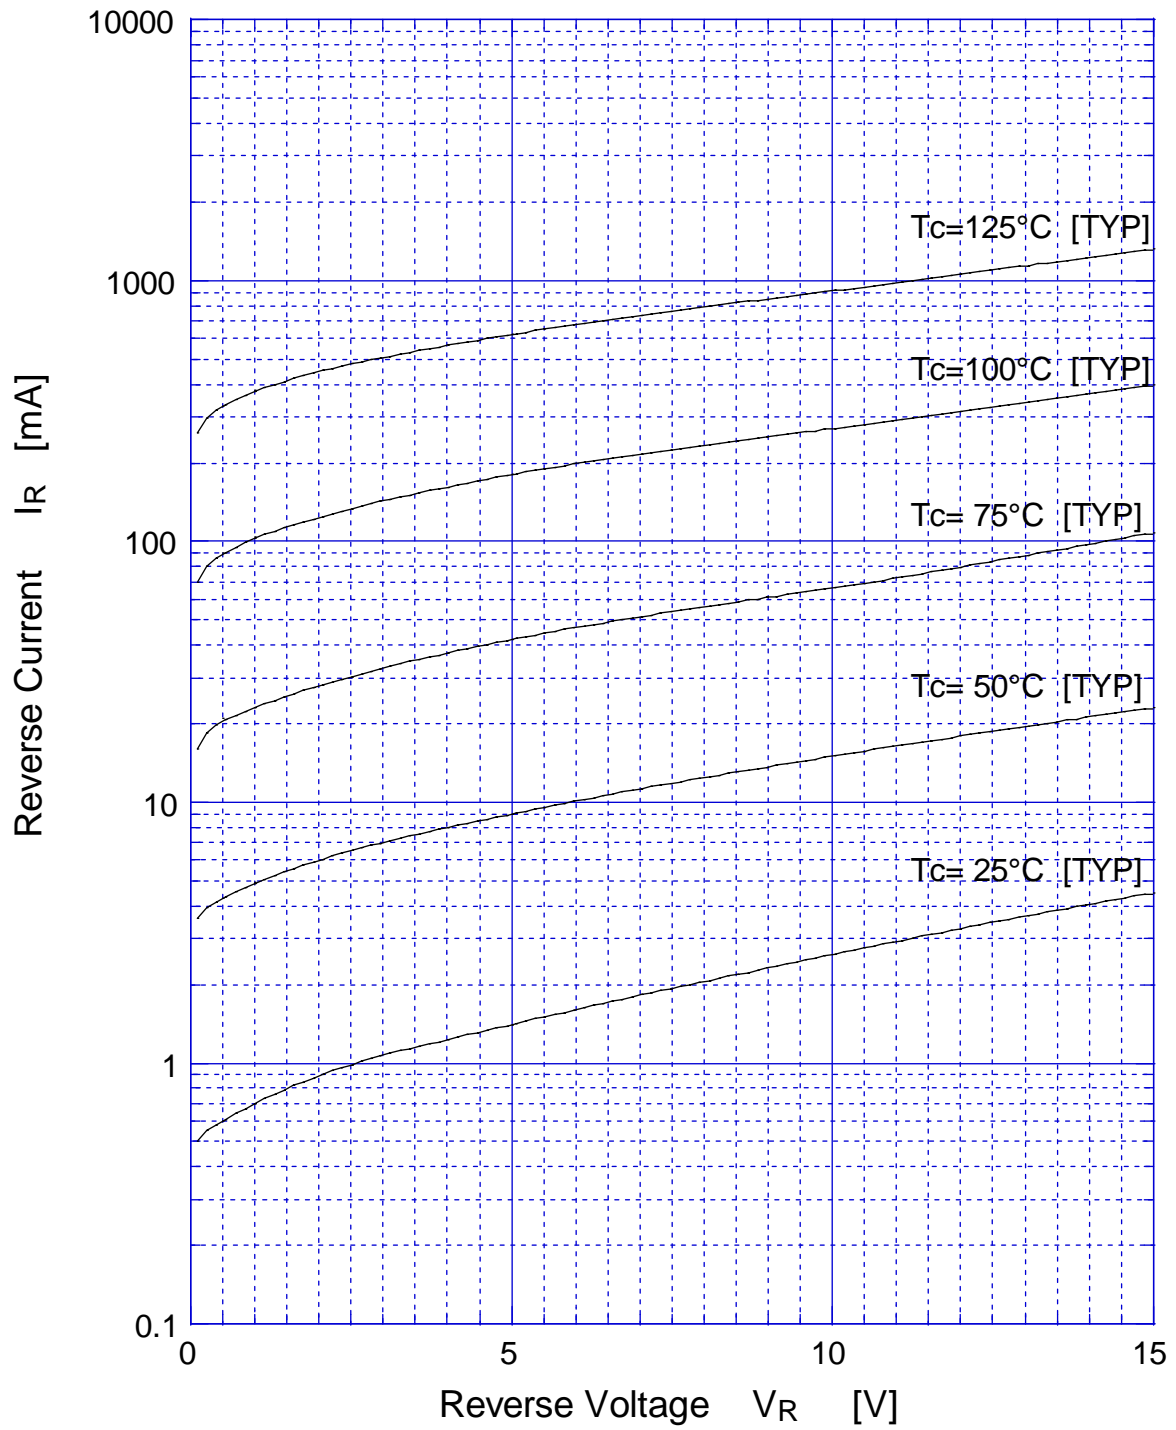



S60HC1R5 Forward Power Dissipation

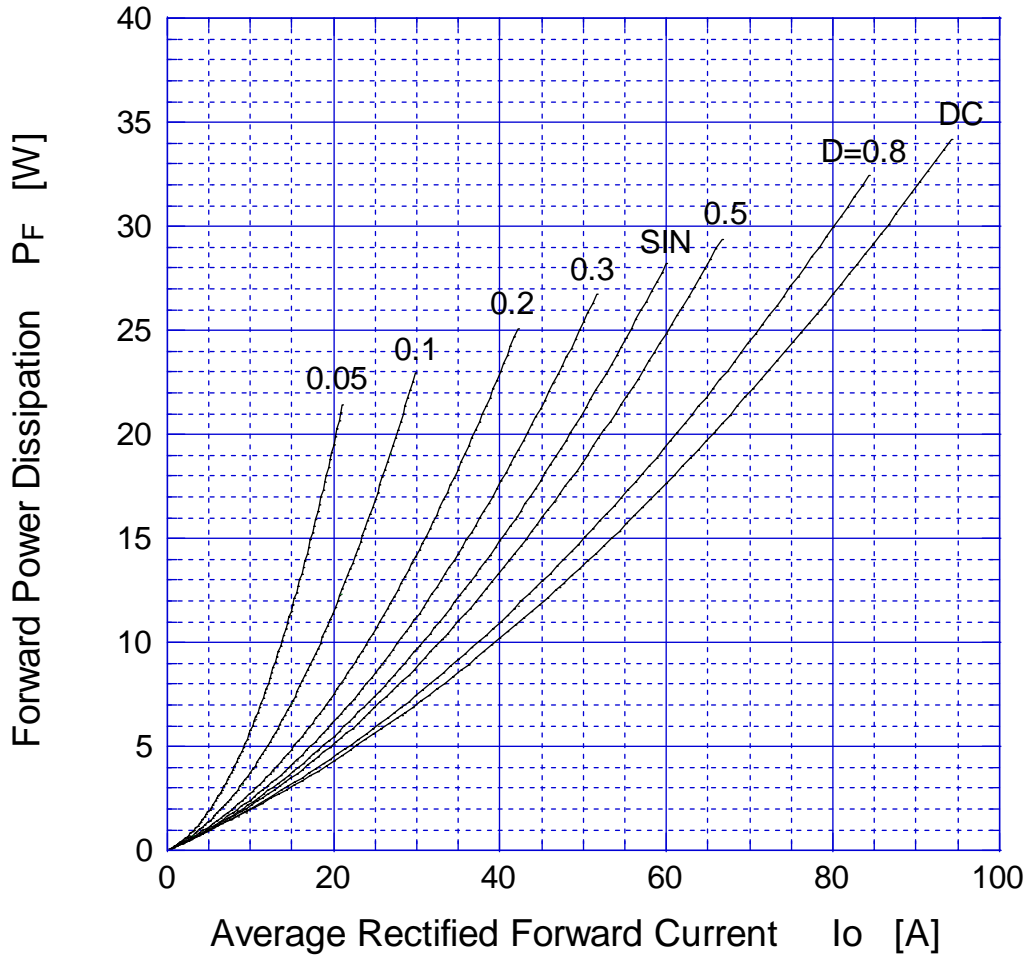

$T_j = 125^\circ\text{C}$


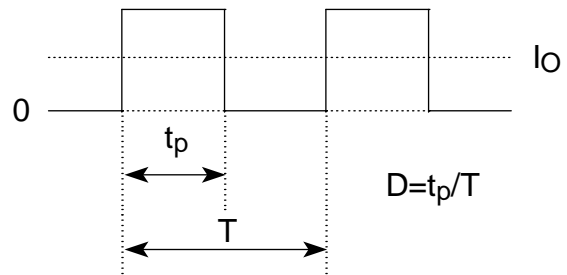


S60HC1R5 Reverse Power Dissipation

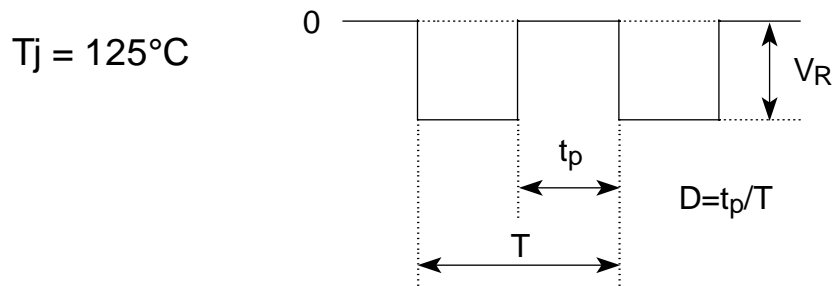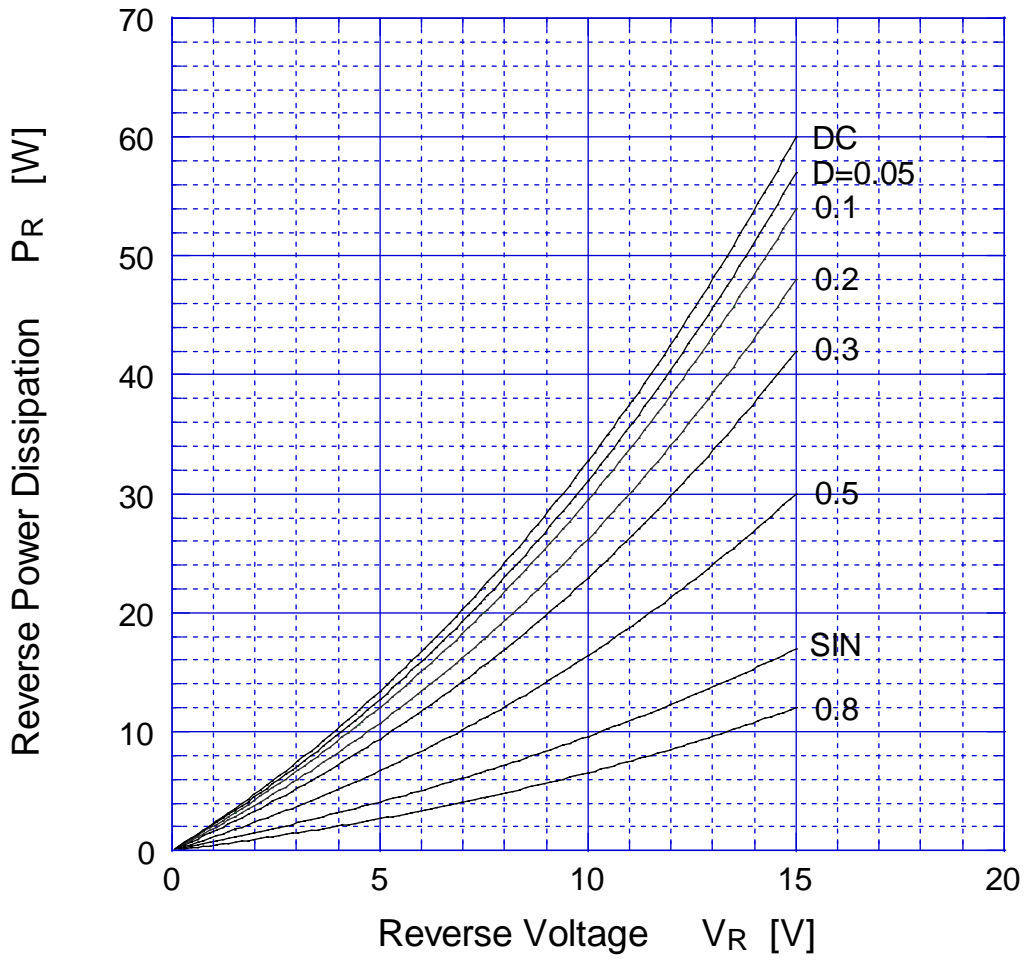


S60HC1R5

Derating Curve

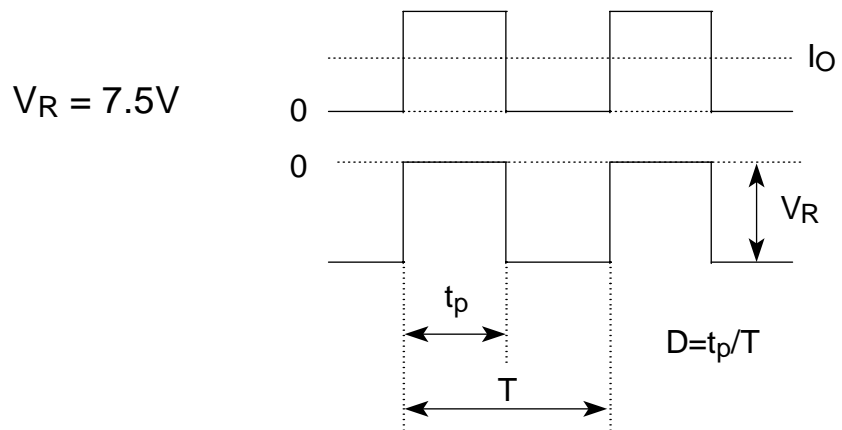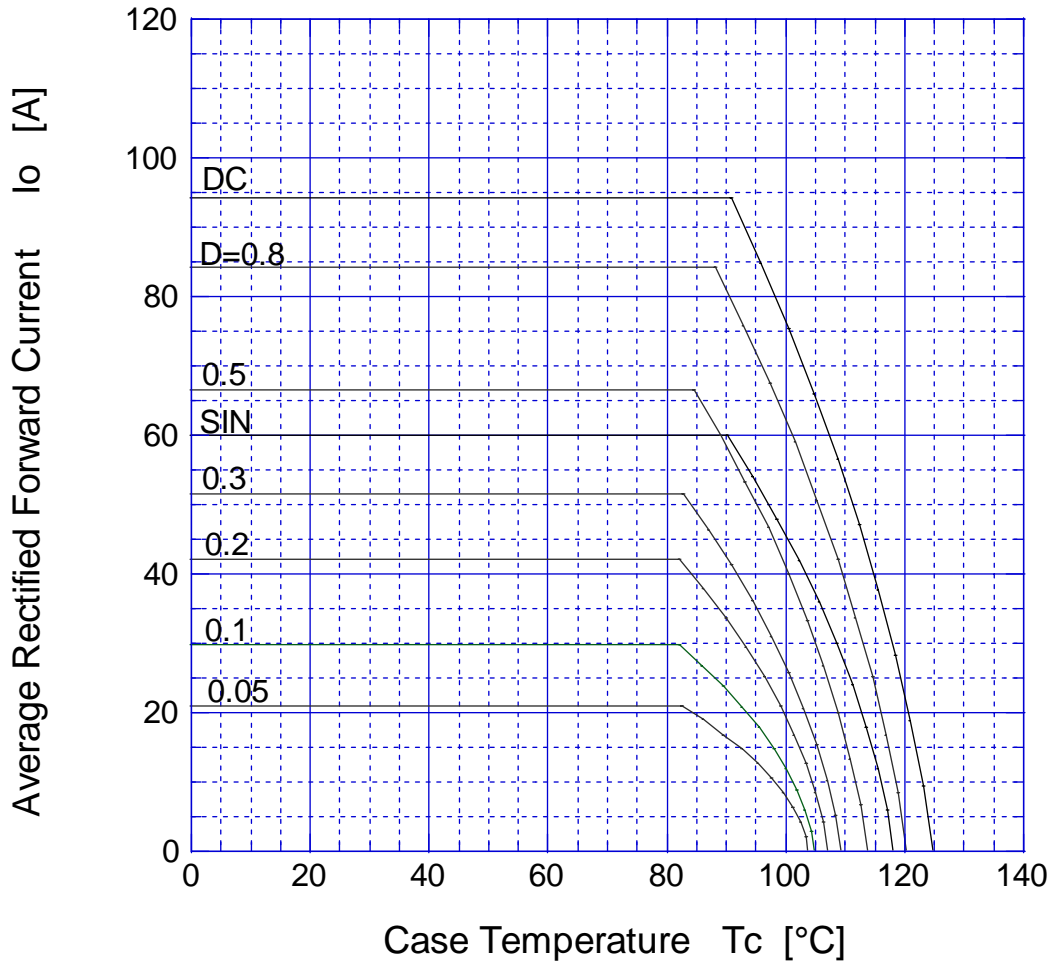

S60HC1R5 Peak Surge Forward Capability

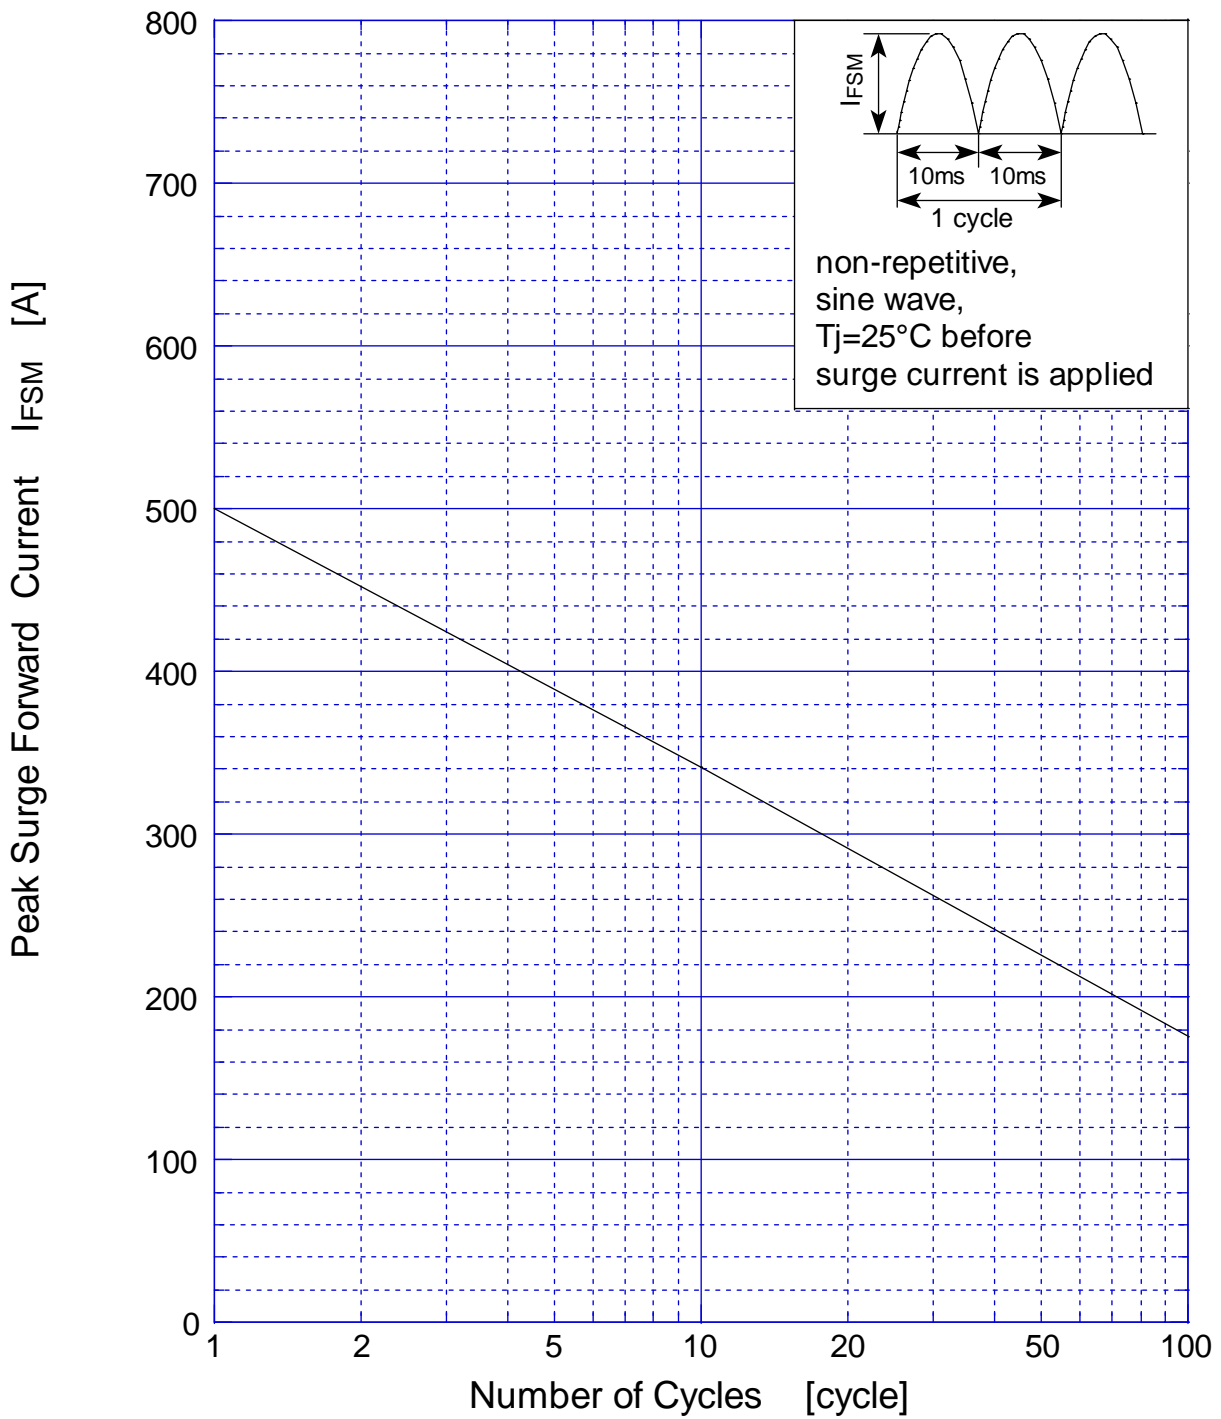

S60HC1R5 Junction Capacitance

