


Description

www.secos.com


The SM79L12 is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that require supply current up to 100mA.

Features

- * Short Circuit Current Limiting
- * Output Current Up To 100mA
- * Thermal Overload Shutdown Protection

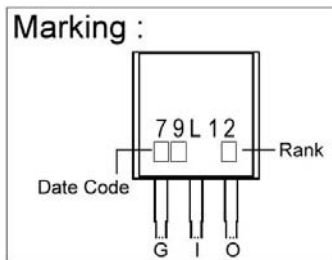

TO-92

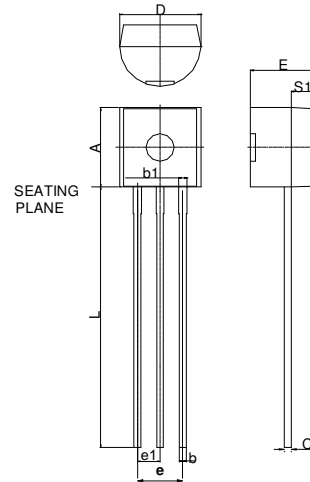


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.45	4.7	D	4.44	4.7
S1	1.02	-	E	3.30	3.81
b	0.36	0.51	L	12.70	-
b1	0.36	0.76	e1	1.150	1.390
C	0.36	0.51	e	2.42	2.66

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Input Voltage	V_{IN}	-35	V
Output Current	I_o	100	mA
Operating Junction Temperature Range	T_j	0~+125	°C
Storage Temperature Range	T_{stg}	-55~+150	°C
Total Power Dissipation	P_D	625	mW

Application Circuit

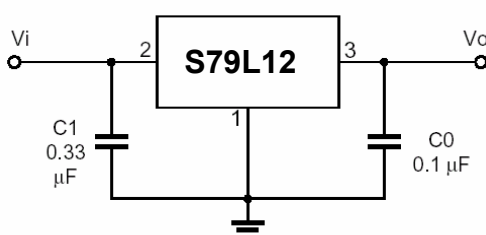

Electrical Characteristics at Ta=25°C

Rank A (3%) $V_i = -19V, I_o = 40mA, T_j = 25^\circ C, C_{IN} = 0.33\mu F, C_{OUT} = 0.1\mu F$ unless otherwise specified

Symbol	Min.	Typ.	Max.	Unit	Test Condition
V_o	-11.58	-12	-12.42	V	$V_{IN} = -19V, I_o = 40mA$
$\Delta V_o - V_{IN}$ (Line Regulation)	-	36	250	mV	$V_{IN} = -14.5V \sim -27V, I_o = 40mA$
$\Delta V_o - I_o$ (Load Regulation)	-	16	100	mV	$V_{IN} = -19V, I_o = 1 \sim 100mA$
I_q Quiescent Current	-	3.5	6	mA	$V_{IN} = -19V, I_o = 40mA$
V_{NO} Output Noise Voltage	-	210	-	μV	$V_{IN} = -19V, BW = 10Hz \sim 100KHz, I_o = 40mA$
RR Ripple Rejection	37	64	-	dB	$V_{IN} = -15V \sim -25V, I_o = 40mA, E_{IN} = 1V_{P-P}, f = 190Hz$

Rank B (5%) $V_i = -19V, I_o = 40mA, T_j = 25^\circ C, C_{IN} = 0.33\mu F, C_{OUT} = 0.1\mu F$ unless otherwise specified

Symbol	Min.	Typ.	Max.	Unit	Test Condition
V_o	-11.4	-12	-12.6	V	$V_{IN} = -19V, I_o = 40mA$
$\Delta V_o - V_{IN}$ (Line Regulation)	-	36	250	mV	$V_{IN} = -14.5V \sim -27V, I_o = 40mA$
$\Delta V_o - I_o$ (Load Regulation)	-	16	100	mV	$V_{IN} = -19V, I_o = 1 \sim 100mA$
I_q Quiescent Current	-	3.5	6	mA	$V_{IN} = -19V, I_o = 40mA$
V_{NO} Output Noise Voltage	-	210	-	μV	$V_{IN} = -19V, BW = 10Hz \sim 100KHz, I_o = 40mA$
RR Ripple Rejection	37	64	-	dB	$V_{IN} = -15V \sim -25V, I_o = 40mA, E_{IN} = 1V_{P-P}, f = 190Hz$