


Series 8000 Fuseblocks

For 1/4" x 1 1/4" Fuses

S-8000

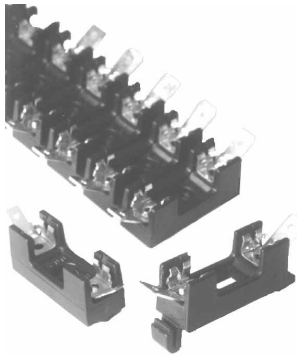

Catalog Symbol: S-8000, S-8100, S-8200, and S-8300 Fuseblocks

Bolt-in Mounting

Voltage Rating: 300V

Agency Approvals:

U.L. Recognized, Guide IZLT2, File E14853A

CSA Certified, Class 6225-01, File 47235

Temperature Rating (RTI): 140°C

Flammability Rating: U.L. 94 VO

General Information:

- For low-cost, tight cluster mounting of 1/4" x 1 1/4" fuses. Available in screw mount and snap-in mount.
- Single-pole to 12 pole units.
- Break-a-way design permits fuseblock to be subdivided with simple finger pressure.
- All types of terminal configurations.
- A host of exclusive Buss® features, "anti-pivot" barriers; solid mount clips; totally sealed base; spec grade terminal tabs.
- Blocks are molded flame retardant thermoplastic. Clips are spring-bronze.

Bolt-in Mounting


Series	Terminal	Amperes	Angle	*Basic Cat. No.	Poles (Suffix)
8000	Solder	U.L. 25A CSA 21A	0° 40°	S-8001- S-8002-	1 - 12
8100	3/16" Quick Connect	U.L. 20A CSA 16A	0° 40°	S-8101- S-8102-	
8200	1/4" Quick Connect	U.L. 20A CSA 16A	0° 40° Side	S-8201- S-8202- S-8203-	
8300	Screw	U.L. 30A CSA 10A	—	S-8301-	

*When ordering bulk quantities, prefix "BK/" to catalog number; i.e., BK/S-8001-12.


Dimensional and Mounting Data

mm
Inches

Single Pole Bolt-in Mounting

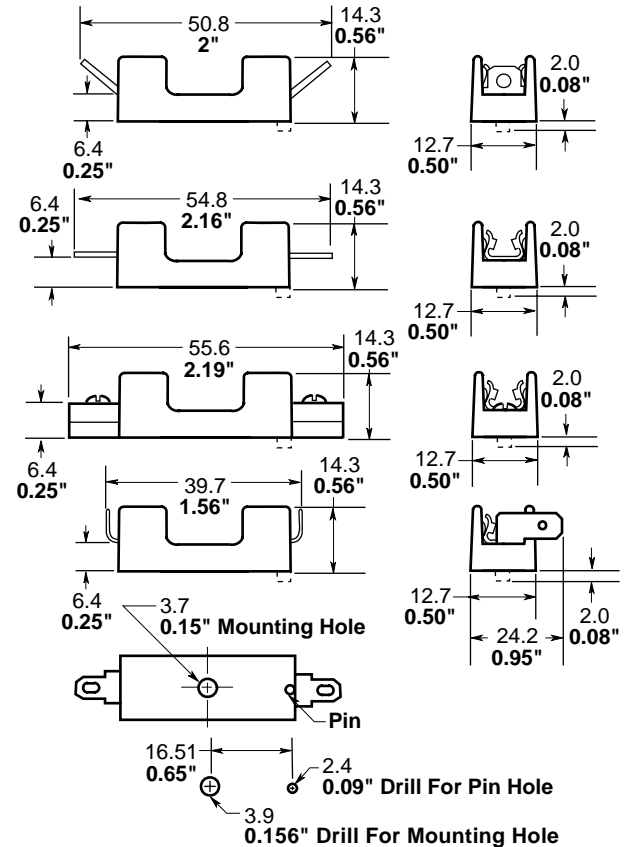

Multiple Pole



Dimensions

No. of Poles	Inches		Millimeters	
	A	B	A	B
1	*	*	*	*
2	1 1/8"	5/8"	28.6	15.9
3	1 3/4"	1 1/4"	44.4	31.8
4	2 3/8"	1 7/8"	60.3	47.6
5	3"	2 1/2"	76.2	63.5
6	3 5/8"	3 1/8"	92.1	79.4
7	4 1/4"	3 3/4"	108.0	95.2
8	4 7/8"	4 3/8"	123.8	111.1
9	5 1/2"	5"	139.7	127.0
10	6 1/8"	5 5/8"	155.6	142.9
11	6 3/4"	6 1/4"	171.4	158.8
12	7 3/8"	6 7/8"	187.3	174.6

*See outline drawings.

Series 8000 Fuseblocks

For 1/4" x 1 1/4" Fuses

S-8000

Anti-Rotation Pin: Single pole blocks may be ordered without the anti-rotational pin simply by adding an "X" to the number of poles. (Example: BK/S-8000-1X.)
 Carton Quantity: 10 Fuseblocks
 Shelf Package: 100 Fuseblocks
 Bulk Carton: Single-pole and 2-pole fuseblocks-1,000;
 Multiple-pole fuseblocks-3-8 pole: 200;
 9-12 pole: 50.

Catalog Code

	BK/	S-8	0	00	-00
Prefix for Bulk Packing					
Series 8000 Product Line					
Type Terminal					
*0"-Solder; *1"-3/16"					
Quick Connect; *2"-1/4"					
Quick Connect; *3"-Screw					
Terminal Angle					
*01"-straight (0); *02"-40°;					
03"-side					
	Number of Poles (01-12)				

*Available only in a single pole

Series 8000 - Snap-In Mounting
 Catalog Symbol: S-8000, S-8100, and S-8200 Fuseblocks
 Snap-in Mounting
 Agency Approvals:
 U.L. Recognized, Guide IZLT2, File E14853A
 CSA Certified, Class 6225-01, File 47235

Snap-in Mounting


Series	Terminal	Amperes	Angle	Cat. No.
8000	Solder	U.L. 25A	0°	S-8001-1-SNP
		CSA 21A	40°	S-8002-1-SNP
8100	3/16" Quick Connect	U.L. 20A	0°	S-8101-1-SNP
		CSA 16A	40°	S-8102-1-SNP
8200	1/4" Quick Connect	U.L. 20A	0°	S-8201-1-SNP
		CSA 16A	Side	S-8203-1-SNP

Snap-in Mount: Available only in single pole. When ordering bulk quantities, prefix "BK/" to catalog number; (Example: BK/S-8001-1-SNP).
 Carton Quantity: 10 Fuseblocks
 Shelf Package: 100 Fuseblocks
 Bulk Carton: 1000 Fuseblocks

Dimensional and Mounting Data

mm
Inches

Single Pole Snap-in Mounting

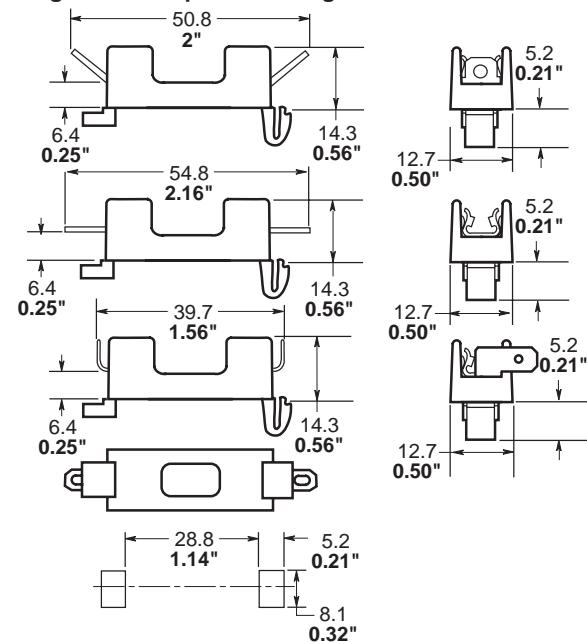

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.