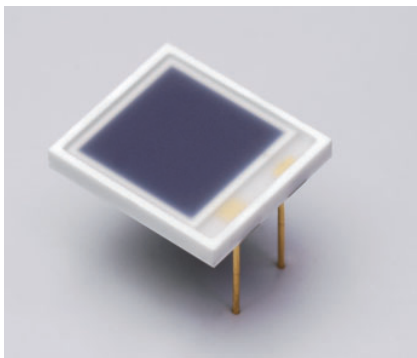


Si PIN photodiode



S8650

Flat surface ideal for bonding to scintillator

The S8650 Si PIN photodiode has an epoxy coating window processed to have a flat surface (flatness: $\pm 5 \mu\text{m}$). When bonded to a scintillator, the flat surface allows highly tight coupling to the scintillator so bubbles are unlikely to penetrate in between.

We also accept special orders for machining flat surfaces on other ceramic package products. Feel free to place an order with us.

Features

- ➔ Flat epoxy coating surface ideal for bonding to scintillator
Flatness: $\pm 5 \mu\text{m}$
- ➔ Photosensitive area: $10 \times 10 \text{ mm}$

Applications

- ➔ Scintillation X-ray detectors
- ➔ Calorimeters, etc.

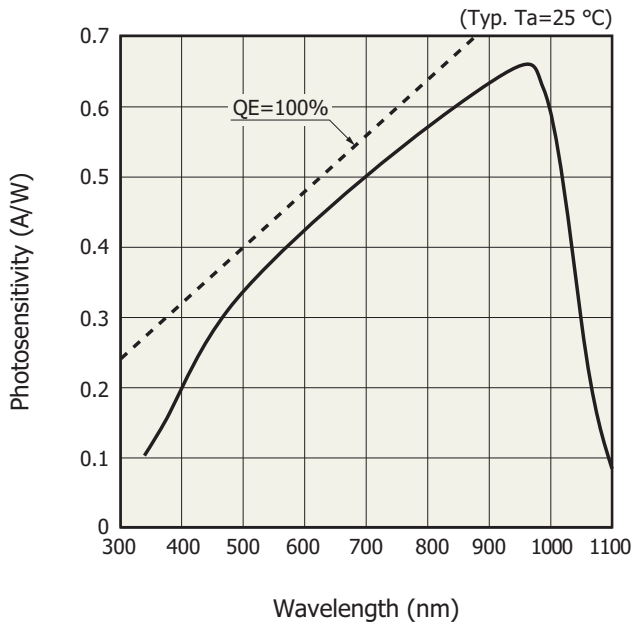
Absolute maximum ratings ($T_a=25 \text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Reverse voltage	V_R Max.	100	V
Operating temperature	T_{opr}	-20 to +60	$^\circ\text{C}$
Storage temperature	T_{stg}	-20 to +80	$^\circ\text{C}$

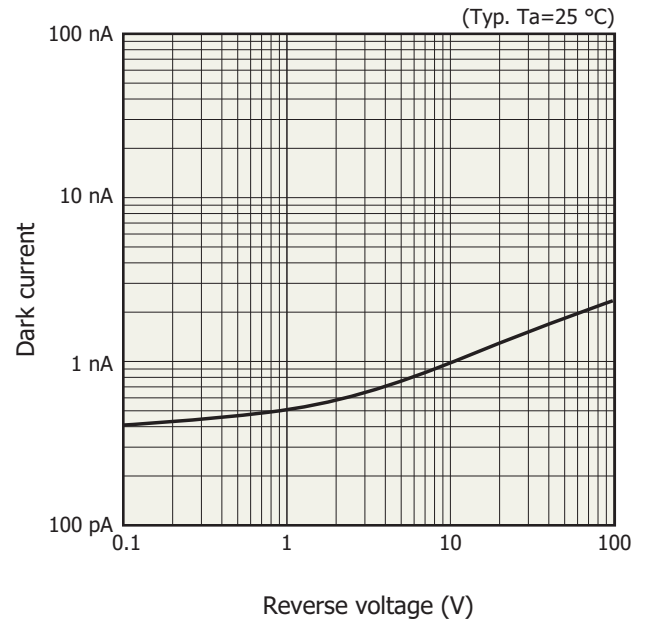
Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics ($T_a=25 \text{ }^\circ\text{C}$)

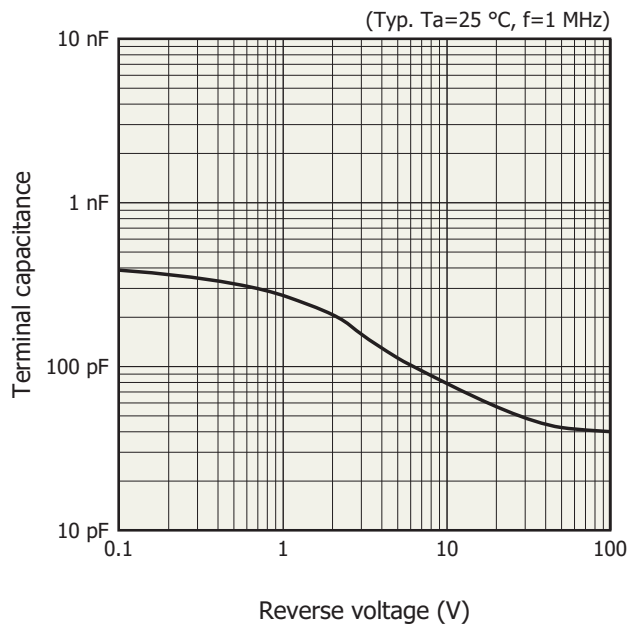
Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	340 to 1100	-	nm
Peak sensitivity wavelength	λ_p		-	960	-	nm
Photosensitivity	S	$\lambda=\lambda_p$	-	0.66	-	A/W
		BGO: $\lambda=480 \text{ nm}$	-	0.30	-	A/W
		CsI (TI): $\lambda=540 \text{ nm}$	-	0.37	-	A/W
Dark current	I_D	$V_R=70 \text{ V}$	-	2	6	nA
Cutoff frequency	f_c	$\lambda=780 \text{ nm}$, $V_R=70 \text{ V}$ $R_L=50 \Omega$, -3 dB	-	40	-	MHz
Terminal capacitance	C_t	$V_R=70 \text{ V}$, $f=1 \text{ MHz}$	-	40	-	pF
Noise equivalent power	NEP	$V_R=70 \text{ V}$, $\lambda=\lambda_p$	-	3.8×10^{-14}	-	$\text{W}/\text{Hz}^{1/2}$

Spectral response

KPINB0231EC

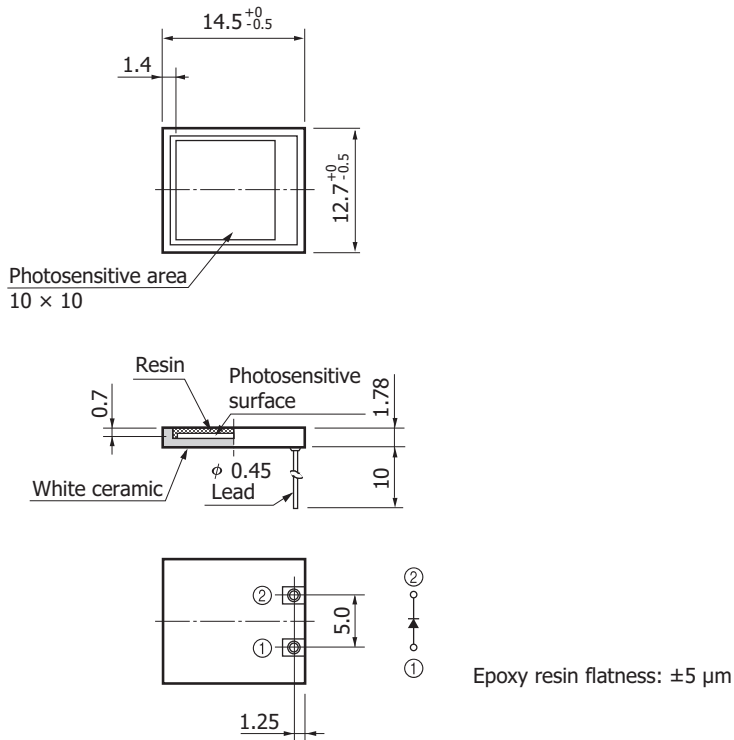
Dark current vs. reverse voltage

KPINB0255EB

Terminal capacitance vs. reverse voltage

KPINB0256EB

▣ Dimensional outline (unit: mm, tolerance unless otherwise noted: ± 0.2)



KPINA0088EB

Information described in this material is current as of April, 2012.

Product specifications are subject to change without prior notice due to improvements or other reasons. Before assembly into final products, please contact us for the delivery specification sheet to check the latest information.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.

Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Thorshamnsgatan 35 16440 Kista, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1 int. 6, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

China: Hamamatsu Photonics (China) Co., Ltd.: 1201 Tower B, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866