



## TRANSZORB<sup>®</sup> Transient Voltage Suppressors

**Stand Off Voltage** 5.0 to 170V  
**Peak Pulse Power** 500W

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- 500W peak pulse power surge capability with a 10/100  $\mu$ s waveform, repetition rate (duty cycle): 0.01%
- High temperature soldering guaranteed: 265°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3kg) tension

### Mechanical Data


**Case:** JEDEC DO-204AC molded plastic body over passivated junction

**Terminals:** Solder plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation

**Mounting Position:** Any    **Weight:** 0.015 oz., 0.4 g

### DO-204AC (DO-15)

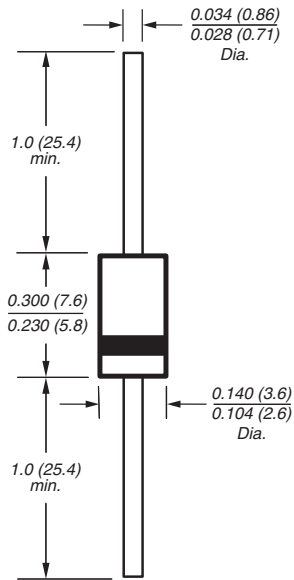

Dimensions in inches and (millimeters)

### Devices for Bidirectional Applications

For bidirectional use C or CA suffix. (e.g. SA5.0C, SA170CA). Electrical characteristics apply in both directions.

### Maximum Ratings and Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter   | Symbol                            | Value          | Unit |
|---|-----------------------------------|----------------|------|
| Peak pulse power dissipation with a 10/1000 $\mu$ s waveform <sup>(1)</sup> (Fig. 1)                | PPPM                              | 500 (min.)     | W    |
| Peak pulse current with a 10/1000 $\mu$ s waveform (Note 1)   | IPPM                              | See Next Table | A    |
| Steady state power dissipation at T <sub>A</sub> = 75°C lead lengths, 0.375" (9.5mm) <sup>(2)</sup> | P <sub>M(AV)</sub>                | 3.0            | W    |
| Peak forward surge current, 10ms single half sine-wave unidirectional only                          | I <sub>FSM</sub>                  | 70             | A    |
| Maximum instantaneous forward voltage at 35A for unidirectional only                                | V <sub>F</sub>                    | 3.5            | V    |
| Operating junction and storage temperature range  | T <sub>J</sub> , T <sub>STG</sub> | -55 to +175    | °C   |

**Notes:** (1) Non-repetitive current pulse, per Fig. 3 and derated above T<sub>A</sub> = 25°C per Fig. 2.

(2) Mounted on copper pad area of 1.6 x 1.6" (40 x 40mm) per Fig. 5.

(3) 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.



**Electrical Characteristics** (TA=25°C unless otherwise noted)

| Device Type           | Breakdown Voltage<br>V <sub>(BR)</sub> at I <sub>T</sub> <sup>(1)</sup><br>(V) |      | Test<br>Current<br>I <sub>T</sub><br>(mA) | Stand-off<br>Voltage<br>V <sub>WM</sub><br>(V) | Maximum<br>Reverse<br>Leakage<br>at V <sub>WM</sub><br>I <sub>D</sub> <sup>(3)</sup> (μA) | Maximum<br>Peak Pulse<br>Current<br>I <sub>PPM</sub> <sup>(2)</sup><br>(A) | Maximum<br>Clamping<br>Voltage at<br>I <sub>PPM</sub><br>V <sub>c</sub> (V) | Maximum<br>Temperature<br>Coefficient<br>of V <sub>(BR)</sub><br>(mV / °C) |
|-----------------------|--|------|---|--|---|--|---|--|
|                       | MIN  | MAX  |   |  |   |  |   |  |
| SA5.0                 | 6.40   | 7.30 | 10  | 5.0  | 600   | 52.1   | 9.6   | 5.0  |
| SA5.0A <sup>(4)</sup> | 6.40   | 7.07 | 10  | 5.0  | 600   | 54.3   | 9.2   | 5.0  |
| SA6.0                 | 6.67   | 8.15 | 10  | 6.0  | 600   | 43.9   | 11.4  | 5.0  |
| SA6.0A                | 6.67   | 7.37 | 10  | 6.0  | 600   | 48.5   | 10.3  | 5.0  |
| SA6.5                 | 7.22   | 8.82 | 10  | 6.5  | 400   | 40.7   | 12.3  | 5.0  |
| SA6.5A                | 7.22   | 7.98 | 10  | 6.5  | 400   | 44.7   | 11.2  | 5.0  |
| SA7.0                 | 7.78   | 9.51 | 10  | 7.0  | 150   | 37.6   | 13.3  | 6.0  |
| SA7.0A                | 7.78   | 8.60 | 10  | 7.0  | 150   | 41.7   | 12.0  | 6.0  |
| SA7.5                 | 8.33   | 10.2 | 1.0                                       | 7.5  | 50  | 35.0   | 14.3  | 7.0  |
| SA7.5A                | 8.33   | 9.21 | 1.0                                       | 7.5  | 50  | 38.8   | 12.9  | 7.0  |
| SA8.0                 | 8.89   | 10.9 | 1.0                                       | 8.0  | 25  | 33.3   | 15.0  | 7.0  |
| SA8.0A                | 8.89   | 9.83 | 1.0                                       | 8.0  | 25  | 36.8   | 13.6  | 7.0  |
| SA8.5                 | 9.44   | 11.5 | 1.0                                       | 8.5  | 10  | 31.4   | 15.9  | 8.0  |
| SA8.5A                | 9.44   | 10.4 | 1.0                                       | 8.5  | 10  | 34.7   | 14.4  | 8.0  |
| SA9.0                 | 10.0   | 12.2 | 1.0                                       | 9.0  | 5.0   | 29.6   | 16.9  | 9.0  |
| SA9.0A                | 10.0   | 11.1 | 1.0                                       | 9.0  | 5.0   | 32.5   | 15.4  | 9.0  |
| SA10                  | 11.1   | 13.6 | 1.0                                       | 10.0   | 1.0   | 26.6   | 18.8  | 10.0   |
| SA10A                 | 11.1   | 12.3 | 1.0                                       | 10.0   | 1.0   | 29.4   | 17.0  | 10.0   |
| SA11                  | 12.2   | 14.9 | 1.0                                       | 11.0   | 1.0   | 24.9   | 20.1  | 11.0   |
| SA11A                 | 12.2   | 13.5 | 1.0                                       | 11.0   | 1.0   | 27.5   | 18.2  | 11.0   |
| SA12                  | 13.3   | 16.3 | 1.0                                       | 12.0   | 1.0   | 22.7   | 22.0  | 12.0   |
| SA12A                 | 13.3   | 14.7 | 1.0                                       | 12.0   | 1.0   | 25.1   | 19.9  | 12.0   |
| SA13                  | 14.4   | 17.6 | 1.0                                       | 13.0   | 1.0   | 21.0   | 23.8  | 13.0   |
| SA13A                 | 14.4   | 15.9 | 1.0                                       | 13.0   | 1.0   | 23.3   | 21.5  | 13.0   |
| SA14                  | 15.6   | 19.1 | 1.0                                       | 14.0   | 1.0   | 19.4   | 25.8  | 14.0   |
| SA14A                 | 15.6   | 17.2 | 1.0                                       | 14.0   | 1.0   | 21.6   | 23.2  | 14.0   |
| SA15                  | 16.7   | 20.4 | 1.0                                       | 15.0   | 1.0   | 18.6   | 26.9  | 16.0   |
| SA15A                 | 16.7   | 18.5 | 1.0                                       | 15.0   | 1.0   | 20.5   | 24.4  | 16.0   |
| SA16                  | 17.8   | 21.8 | 1.0                                       | 16.0   | 1.0   | 17.4   | 28.8  | 19.0   |
| SA16A                 | 17.8   | 19.7 | 1.0                                       | 16.0   | 1.0   | 19.2   | 26.0  | 17.0   |
| SA17                  | 18.9   | 23.1 | 1.0                                       | 17.0   | 1.0   | 16.4   | 30.5  | 20.0   |
| SA17A                 | 18.9   | 20.9 | 1.0                                       | 17.0   | 1.0   | 18.1   | 27.6  | 19.0   |
| SA18                  | 20.0   | 24.4 | 1.0                                       | 18.0   | 1.0   | 15.5   | 32.2  | 21.0   |
| SA18A                 | 20.0   | 22.1 | 1.0                                       | 18.0   | 1.0   | 17.1   | 29.2  | 20.0   |
| SA20                  | 22.2   | 27.1 | 1.0                                       | 20.0   | 1.0   | 14.0   | 35.8  | 25.0   |
| SA20A                 | 22.2   | 24.5 | 1.0                                       | 20.0   | 1.0   | 15.4   | 32.4  | 23.0   |
| SA22                  | 24.4   | 29.8 | 1.0                                       | 22.0   | 1.0   | 12.7   | 39.4  | 28.0   |
| SA22A                 | 24.4   | 26.9 | 1.0                                       | 22.0   | 1.0   | 14.1   | 35.5  | 25.0   |
| SA24                  | 26.7   | 32.6 | 1.0                                       | 24.0   | 1.0   | 11.6   | 43.0  | 31.0   |
| SA24A                 | 26.7   | 29.5 | 1.0                                       | 24.0   | 1.0   | 12.9   | 38.9  | 28.0   |
| SA26                  | 28.9   | 35.3 | 1.0                                       | 26.0   | 1.0   | 10.7   | 46.6  | 31.0   |
| SA26A                 | 28.9   | 31.9 | 1.0                                       | 26.0   | 1.0   | 11.9   | 42.1  | 30.0   |
| SA28                  | 31.1   | 38.0 | 1.0                                       | 28.0   | 1.0   | 10.0   | 50.1  | 35.0   |
| SA28A                 | 31.1   | 34.4 | 1.0                                       | 28.0   | 1.0   | 11.0   | 45.4  | 31.0   |
| SA30                  | 33.3   | 40.7 | 1.0                                       | 30.0   | 1.0   | 9.3  | 53.5  | 39.0   |
| SA30A                 | 33.3   | 36.8 | 1.0                                       | 30.0   | 1.0   | 10   | 48.4  | 36.0   |
| SA33                  | 36.7   | 44.9 | 1.0                                       | 33.0   | 1.0   | 8.5  | 59.0  | 42.0   |
| SA33A                 | 36.7   | 40.6 | 1.0                                       | 33.0   | 1.0   | 9.4  | 53.3  | 39.0   |
| SA36                  | 40.0   | 48.9 | 1.0                                       | 36.0   | 1.0   | 7.8  | 64.3  | 46.0   |
| SA36A                 | 40.0   | 44.2 | 1.0                                       | 36.0   | 1.0   | 8.6  | 58.1  | 41.0   |
| SA40                  | 44.4   | 54.3 | 1.0                                       | 40.0   | 1.0   | 7.0  | 71.4  | 51.0   |
| SA40A                 | 44.4   | 49.1 | 1.0                                       | 40.0   | 1.0   | 7.8  | 64.5  | 46.0   |



## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)


| Device Type | Breakdown Voltage V <sub>BR</sub> at I <sub>T</sub> <sup>(1)</sup> (V) |      | Test Current I <sub>T</sub> (mA) | Stand-off Voltage V <sub>WM</sub> (V) | Maximum Reverse Leakage at V <sub>WM</sub> I <sub>D</sub> <sup>(3)</sup> (μA) | Maximum Peak Pulse Current I <sub>PPM</sub> <sup>(2)</sup> (A) | Maximum Clamping Voltage at I <sub>PPM</sub> V <sub>C</sub> (V) | Maximum Temperature Coefficient of V <sub>BR</sub> (mV / °C) |
|-------------|--|------|----------------------------------|---------------------------------------|---|--|---|--|
|             | MIN  | MAX  |                                  |                                       |   |  |   |  |
| SA43        | 47.8   | 58.4 | 1.0                              | 43.0                                  | 1.0   | 6.5  | 76.7  | 55.0   |
| SA43A       | 47.8   | 52.8 | 1.0                              | 43.0                                  | 1.0   | 7.2  | 69.4  | 50.0   |
| SA45        | 50.0   | 61.1 | 1.0                              | 45.0                                  | 1.0   | 6.2  | 80.3  | 58.0   |
| SA45A       | 50.0   | 55.3 | 1.0                              | 45.0                                  | 1.0   | 6.9  | 72.7  | 52.0   |
| SA48        | 53.3   | 65.2 | 1.0                              | 48.0                                  | 1.0   | 5.8  | 85.5  | 63.0   |
| SA48A       | 53.3   | 58.9 | 1.0                              | 48.0                                  | 1.0   | 6.5  | 77.4  | 56.0   |
| SA51        | 56.7   | 69.3 | 1.0                              | 51.0                                  | 1.0   | 5.5  | 91.1  | 66.0   |
| SA51A       | 56.7   | 62.7 | 1.0                              | 51.0                                  | 1.0   | 6.1  | 82.4  | 61.0   |
| SA54        | 60.0   | 73.3 | 1.0                              | 54.0                                  | 1.0   | 5.2  | 96.3  | 71.0   |
| SA54A       | 60.0   | 66.3 | 1.0                              | 54.0                                  | 1.0   | 5.7  | 87.1  | 65.0   |
| SA58        | 64.4   | 78.7 | 1.0                              | 58.0                                  | 1.0   | 4.9  | 103   | 78.0   |
| SA58A       | 64.4   | 71.2 | 1.0                              | 58.0                                  | 1.0   | 5.3  | 93.6  | 70.0   |
| SA60        | 66.7   | 81.5 | 1.0                              | 60.0                                  | 1.0   | 4.7  | 107   | 80.0   |
| SA60A       | 66.7   | 73.7 | 1.0                              | 60.0                                  | 1.0   | 5.2  | 96.8  | 71.0   |
| SA64        | 71.1   | 86.9 | 1.0                              | 64.0                                  | 1.0   | 4.4  | 114   | 86.0   |
| SA64A       | 71.1   | 78.6 | 1.0                              | 64.0                                  | 1.0   | 4.9  | 103   | 76.0   |
| SA70        | 77.8   | 95.1 | 1.0                              | 70.0                                  | 1.0   | 4.0  | 125   | 94.0   |
| SA70A       | 77.8   | 86.0 | 1.0                              | 70.0                                  | 1.0   | 4.4  | 113   | 85.0   |
| SA75        | 83.3   | 102  | 1.0                              | 75.0                                  | 1.0   | 3.7  | 134   | 101  |
| SA75A       | 83.3   | 92.1 | 1.0                              | 75.0                                  | 1.0   | 4.1  | 121   | 91.0   |
| SA78        | 86.7   | 106  | 1.0                              | 78.0                                  | 1.0   | 3.6  | 139   | 105  |
| SA78A       | 86.7   | 95.8 | 1.0                              | 78.0                                  | 1.0   | 4.0  | 126   | 95.0   |
| SA85        | 94.4   | 115  | 1.0                              | 85.0                                  | 1.0   | 3.3  | 151   | 114  |
| SA85A       | 94.4   | 104  | 1.0                              | 85.0                                  | 1.0   | 3.6  | 137   | 103  |
| SA90        | 100  | 122  | 1.0                              | 90.0                                  | 1.0   | 3.1  | 160   | 121  |
| SA90A       | 100  | 111  | 1.0                              | 90.0                                  | 1.0   | 3.4  | 146   | 110  |
| SA100       | 111  | 136  | 1.0                              | 100                                   | 1.0   | 2.8  | 179   | 135  |
| SA100A      | 111  | 123  | 1.0                              | 100                                   | 1.0   | 3.1  | 162   | 123  |
| SA110       | 122  | 149  | 1.0                              | 110                                   | 1.0   | 2.6  | 196   | 148  |
| SA110A      | 122  | 135  | 1.0                              | 110                                   | 1.0   | 2.8  | 177   | 133  |
| SA120       | 133  | 163  | 1.0                              | 120                                   | 1.0   | 2.3  | 214   | 162  |
| SA120A      | 133  | 147  | 1.0                              | 120                                   | 1.0   | 2.6  | 193   | 146  |
| SA130       | 144  | 176  | 1.0                              | 130                                   | 1.0   | 2.2  | 230   | 175  |
| SA130A      | 144  | 159  | 1.0                              | 130                                   | 1.0   | 2.4  | 209   | 158  |
| SA150       | 167  | 204  | 1.0                              | 150                                   | 1.0   | 1.9  | 268   | 203  |
| SA150A      | 167  | 185  | 1.0                              | 150                                   | 1.0   | 2.1  | 243   | 184  |
| SA160       | 178  | 218  | 1.0                              | 160                                   | 1.0   | 1.7  | 257   | 217  |
| SA160A      | 178  | 197  | 1.0                              | 160                                   | 1.0   | 1.9  | 259   | 196  |
| SA170       | 189  | 231  | 1.0                              | 170                                   | 1.0   | 1.6  | 304   | 230  |
| SA170A      | 189  | 209  | 1.0                              | 170                                   | 1.0   | 1.8  | 275   | 208  |

- Notes:** (1) Pulse test: t<sub>p</sub> ≤ 50ms  
(2) Surge current waveform per Fig. 3 and derate per Fig. 2  
(3) For bidirectional types with V<sub>WM</sub> of 10 Volts and less, the I<sub>D</sub> limit is doubled  
(4) For the bidirectional SA5.0CA, the maximum V<sub>BR</sub> is 7.25V  
(5) All terms and symbols are consistent with ANSI/IEEE C62.35




**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 - Peak Pulse Power Rating Curve**

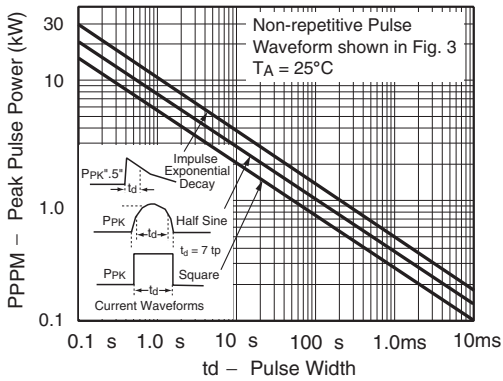


**Fig. 2 - Pulse Derating Curve**

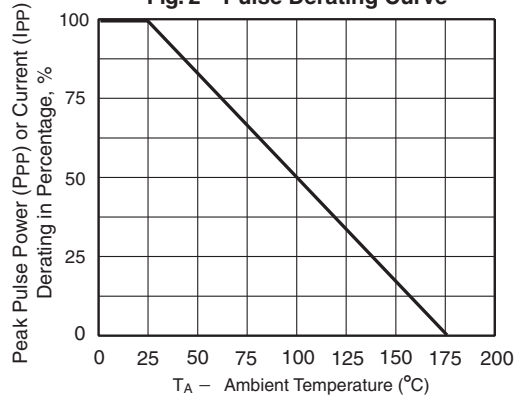


**Fig. 3 - Pulse Waveform**

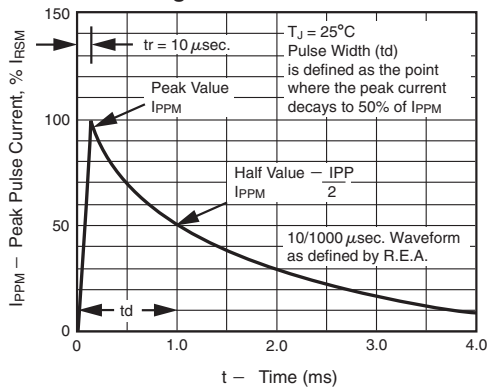


**Fig. 4 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only**

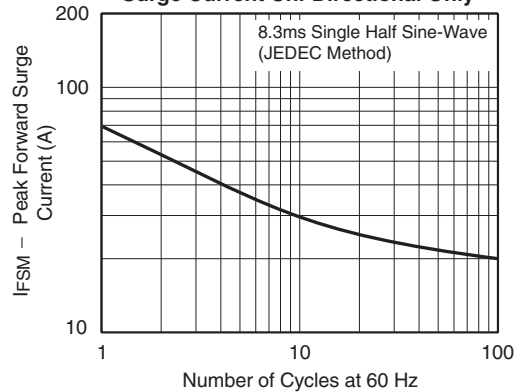

**Fig. 5 - Steady State Power Derating Curve**

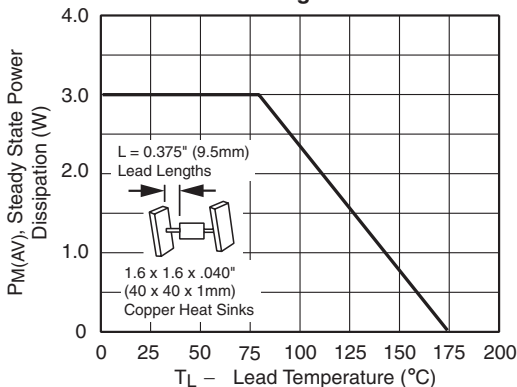


**Fig. 6 - Capacitance**

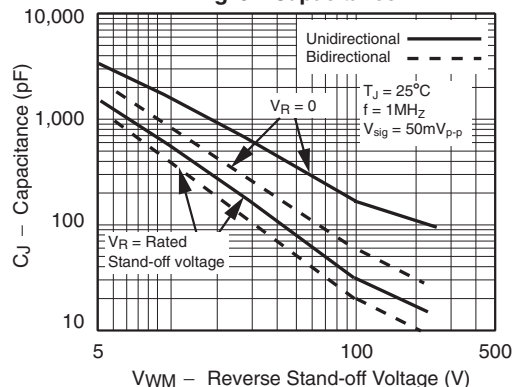




## Ratings and Characteristic Curves (T<sub>A</sub> = 25°C unless otherwise noted)


**Fig. 7 - Incremental Clamping Voltage Curve Unidirectional**

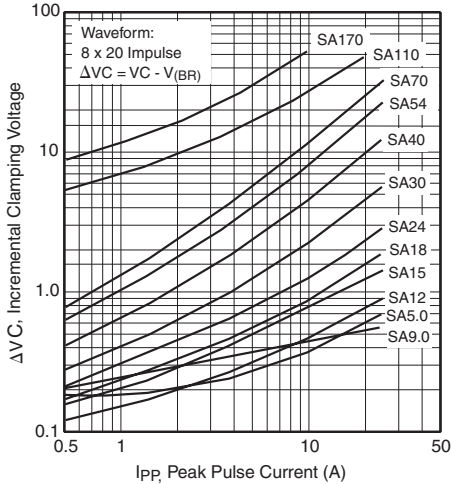


**Fig. 8 - Incremental Clamping Voltage Curve Unidirectional**

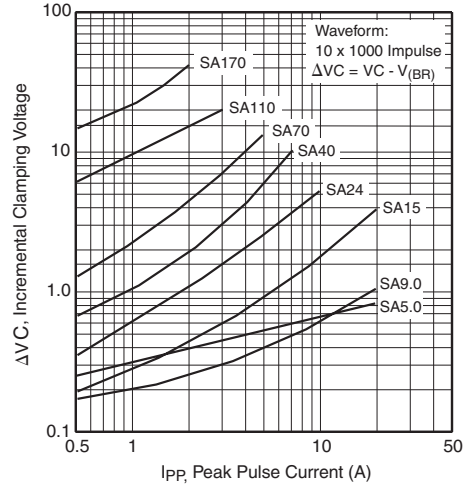

**Fig. 9 - Incremental Clamping Voltage Curve Bidirectional**

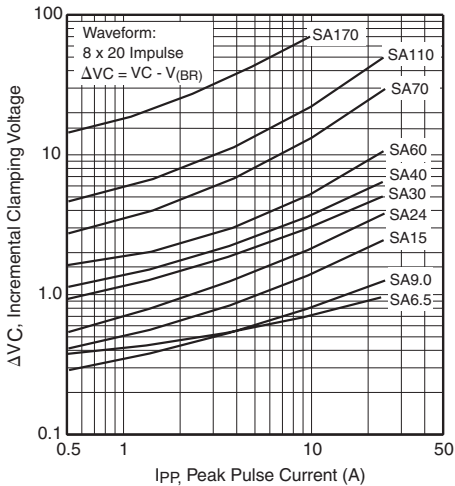


**Fig. 10 - Incremental Clamping Voltage Curve Bidirectional**

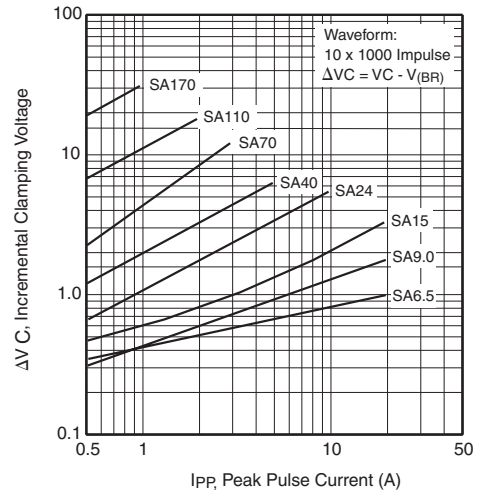



**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig. 11 - Typical Instantaneous Forward Voltage**

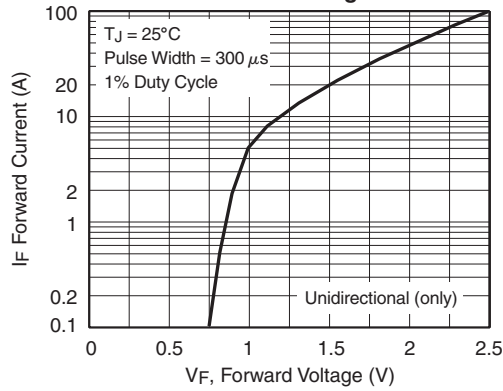

**Fig. 12 - Breakdown Voltage Temperature Coefficient Curve**

