

## 3.5A, 3.0-15.0V H-Bridge Driver

### Description

The SA8339 is one channel H-Bridge driver IC, it provides integrated motor-driver solution for toys, robotics, consumer products and other low voltage or battery-powered motion control applications.

The SA8339 maximum operational voltage is 15.0V. It can supply up to 3.5A of output continuous current and 6.0A of output peak current. There is internal shutdown function for over-temperature protection and over-current protection ( $I_{OCP} = 6.0\text{ A}$ ).

Package material is Pb-Free Product & RoHS compliant for the purpose of environmental protection and for sustainable development of the earth.


### Features

- Operation voltage up to 15.0V
- Continuous current output up to 3.5A
- Peak current up to 6.0A
- $R_{DS(on)}$ : 110m $\Omega$  (HS+LS)
- Support PWM control
- Over current protection
- Over temperature protection
- UVLO protection
- Low standby current
- Low quiescent current
- SOP8 package

### Application

- Robotics (R/C servo, Sweeping robot)
- Toys (R/C car, R/C aircraft)
- Any relevant DC motor applications.

## SA8339 Package & Simplified Application

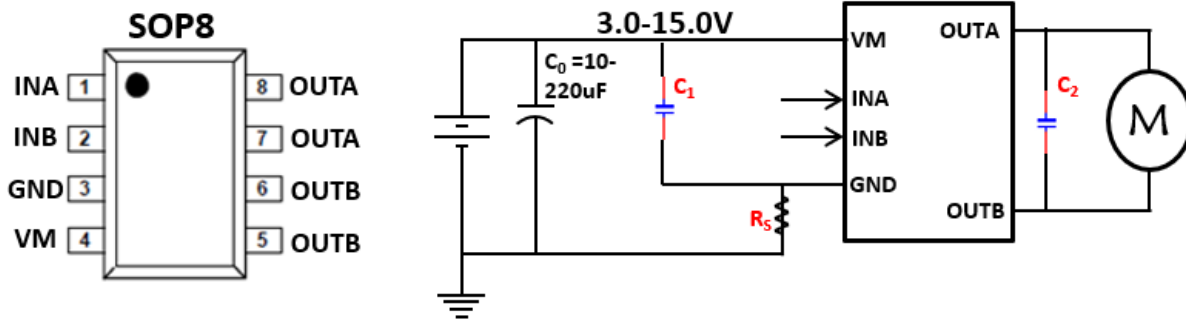





### Device Information

| Part No. | Package | Quantity | Operation Temp. |
|----------|---------|----------|-----------------|
| SA8339   | SOP8    | 4000     | -40~85 °C       |

## 3.5A, 3.0-15.0V H-Bridge Driver

### Package

SOP8

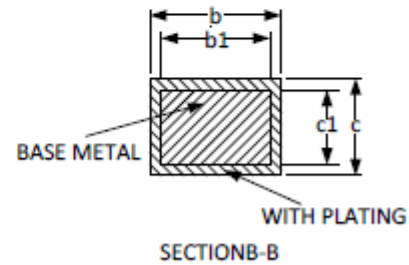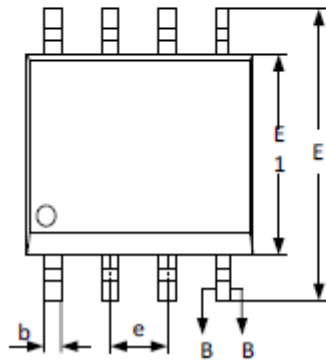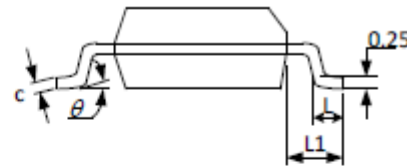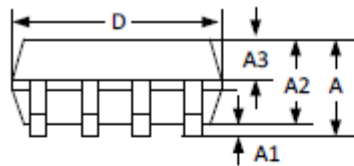

| SYMBOL | MILLIMETER |      |      |
|--------|------------|------|------|
|        | MIN        | NOM  | MAX  |
| A      | --         | --   | 1.77 |
| A1     | 0.08       | 0.18 | 0.28 |
| A2     | 1.20       | 1.40 | 1.60 |
| A3     | 0.55       | 0.65 | 0.75 |
| b      | 0.39       | --   | 0.48 |
| b1     | 0.38       | 0.41 | 0.43 |
| c      | 0.21       | --   | 0.26 |
| c1     | 0.19       | 0.20 | 0.21 |
| D      | 4.70       | 4.90 | 5.10 |
| E      | 5.80       | 6.00 | 6.20 |
| E1     | 3.70       | 3.90 | 4.10 |
| e      | 1.27BSC    |      |      |
| L      | 0.50       | 0.65 | 0.80 |
| L1     | 1.05BSC    |      |      |
| θ      | 0          | --   | 8°   |

**3.5A, 3.0-15.0V H-Bridge Driver****IMPORTANT NOTICE**

Syta Technology Corporation (Sytatek) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and to discontinue any product without notice at any time.

Sytatek cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Sytatek product. No circuit patent licenses are implied.