



Part Number	Center Frequency (MHz)	3dB Bandwidth (MHz)	Insertion Loss (dB)	Ripple (dB max.)	Input/Output Impedance
SAFCC110MCA1T00	110.0	±1.023 min.	3.7 max. (at min. loss point)	0.6	480ohm// -1.6μH (Input) 650ohm// -1.6μH (Output)


● PHS




SAFDA243MRD9X00



SAFCC243MRB9X00

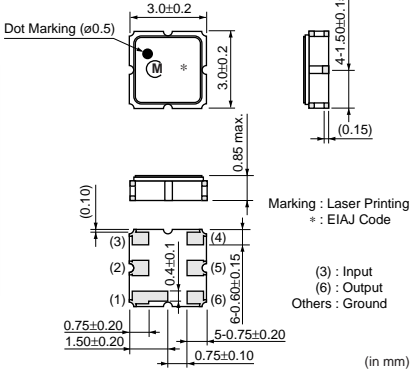

(in mm)

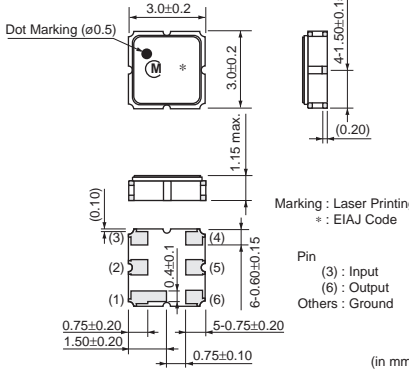


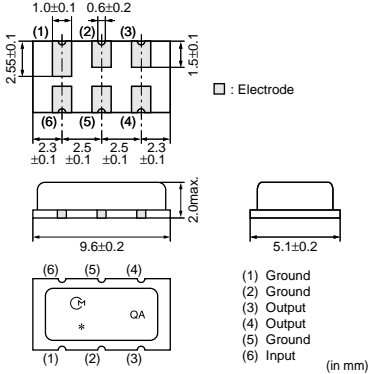
(in mm)

Marking : Laser Printing
* : EIAJ Code

(3) : Input
(6) : Output
Others : Ground

Part Number	Center Frequency (MHz)	3dB Bandwidth (kHz)	Insertion Loss (dB)	Ripple (dB max.)	Input/Output Impedance
SAFDA243MRD9X00	243.95	±130 min.	4.5 max. (at fo point)	1.0 (fo±100kHz)	760ohm// -1.0pF (Input) 760ohm// -0.8pF (Output)
SAFDA265MRD5X00	265.55	±130 min.	4.5 max. (at fo point)	1 (fo±100kHz)	740ohm// -1.0pF (Input) 820ohm// -0.9pF (Output)
SAFCC243MRB9X00	243.95	±130 min.	4.5 max. (at min. loss point)	1.0 (fo±100kHz)	760ohm// -1.0pF (Input) 760ohm// -0.8pF (Output)
SAFCC265MRB5X01	265.55	±130 min.	4.5 max. (at fo point)	1.0 (fo±100kHz)	740ohm// -1.0pF (Input) 820ohm// -0.9pF (Output)

● Wireless LAN

□ : Electrode

(1) Ground
(2) Ground
(3) Output
(4) Output
(5) Ground
(6) Input

(in mm)

Part Number	Center Frequency (MHz)	3dB Bandwidth (MHz)	Insertion Loss (dB)	Ripple (dB max.)	Input/Output Impedance
SAFJA43M0WC0Z00R03	43.00 ±0.1MHz (fo)	1.25 min.	21.0 max. (at fo point)	-	-