


● 5G W-LAN


SAFCD450MCL0N00

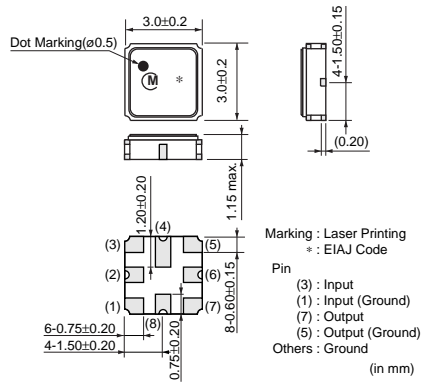

Part Number	Center Frequency (MHz)	3dB Bandwidth (MHz)	Insertion Loss (dB)	Ripple (dB max.)	Input/Output Impedance
SAFCD450MCL0N00	450	±8.2 min.	4.5 max. (at min. loss point)	1.5 (fo±8.2MHz)	200ohm//150nH (Input) 200ohm//150nH (Output)
SAFCD570MCL0N00	570	±8.5 min. (2dB Bandwidth)	7.0 max. (fo±8.5MHz)	2.0 (fo±8.5MHz)	200ohm//100nH (Input) 200ohm//100nH (Output)

for IF

BGS Filters

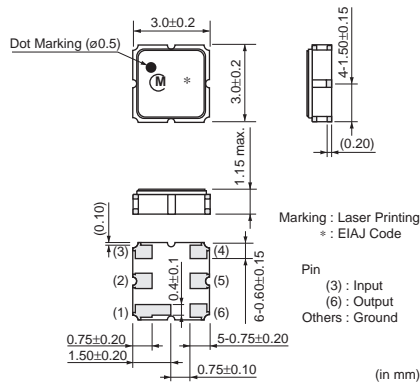

Part Number	Nominal Center Frequency(fn) (MHz)	3dB Bandwidth (MHz)
MKFCC40M0CC0P00R05	40.00	fn±1.75 min.