

SAP24xxx-K Series

Panel Mount




- Ratings from 10A to 90A @ 24-280 VAC
- 800 Volts transient overvoltage
- Removable IP 20 touch-safe cover
- Easy-to-use thermal pad
- Input LED status indicator
- EMC Compliant for reliable operation in harsh environments
- Strengthened current design improves reliability
- UL/CE approved, RoHS compliant.
- Designed in according with the requirements of IEC 62314
- Zero-crossing (resistive loads) or instantaneous (inductive loads) output

PRODUCT SELECTION

Control Voltage	5A	10A	25A	40A	50A
90-280 VAC	SAP2405A-K	SAP2410A-K	SAP2425A-K	SAP2440A-K	SAP2450A-K
3-32 VDC	SAP2405D-K	SAP2410D-K	SAP2425D-K	SAP2440D-K	SAP2450D-K

MODEL NAME DEFINITIONS

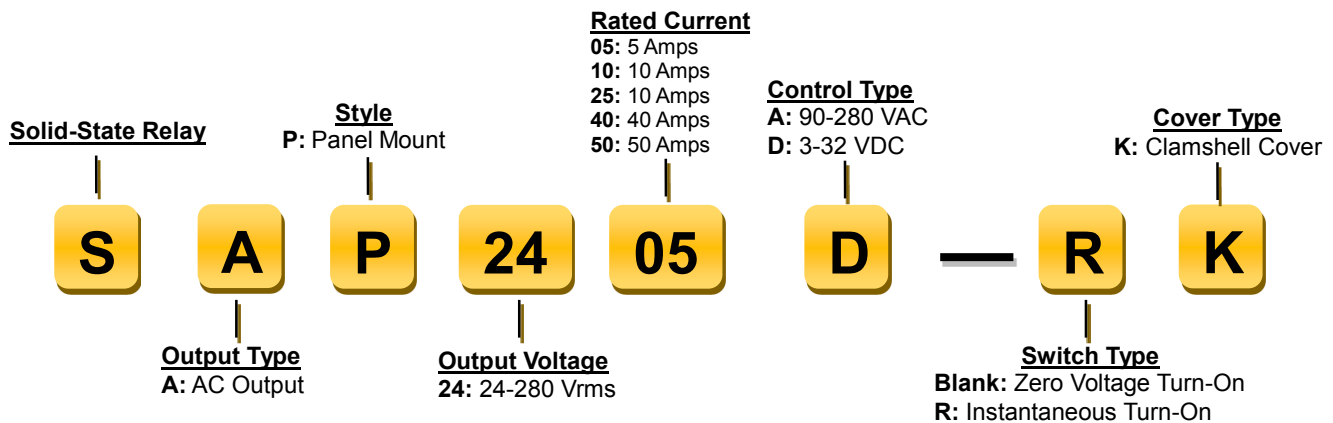

OUTPUT SPECIFICATIONS ⁽¹⁾

Description	5A	10A	25A	40A	50A
Operating Voltage (47-63Hz) [Vrms]	24-280	24-280	24-280	24-280	24-280
Transient Overvoltage [Vpk]	600	600	600	600	600
Maximum Off-State Leakage Current @ Rated Voltage [mA rms]	8	8	8	8	8
Minimum Off-State dv/dt @ Maximum Rated Voltage [V/μsec]	300	300	500	500	500
Maximum Load Current ⁽²⁾ [Arms]	5	10	25	40	50
Minimum Load Current [Arms]	0.15	0.15	0.15	0.15	0.15
Maximum 1 Cycle Surge Current (50/60Hz) [A pk]	114/120	153/160	392/410	477/500	573/600
Maximum On-State Voltage Drop @ Rated Current [Vrms]	1.15	1.15	1.15	1.15	1.15
Thermal Resistance Junction to Case (Rjc) [°C/W]	2.03	1.89	1.12	0.71	0.59
Maximum 1/2 Cycle I ² t for Fusing (50/60 Hz) [A ² sec]	106/96	142/129	285/259	1770/1629	2124/1954
Minimum Power Factor (with Maximum Load)	0.5	0.5	0.5	0.5	0.5
Weight (typical) [Gram]	75	75	80	80	85


INPUT SPECIFICATIONS ⁽¹⁾

Description	SAP24xxA-K	SAP24xxD-K
Control Voltage Range	90-280 Vrms	3-32 VDC
Maximum Reverse Voltage	-	-32
Minimum Turn-On Voltage	90 Vrms	3.0 VDC
Minimum Turn-Off Voltage	10 Vrms	1.0 VDC
Minimum Input Current [mA]	5	7
Maximum Input Current [mA]	10	12
Nominal Input Impedance	Current Regulated	Current Regulated
Maximum Turn-On Time ⁽³⁾ [msec]	20	1/2 cycle
Maximum Turn-Off Time [msec]	30	1/2 cycle

GENERAL SPECIFICATIONS

Description	Parameters
Dielectric Strength, Input/Output/Base (50/60Hz)	4000 Vrms
Minimum Insulation Resistance (@ 500 V DC)	10 ⁹ Ohm
Maximum Capacitance, Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125 °C
Housing Material	UL E211125: 94 V-0
Terminal Material	Gilded
Baseplate Material	Aluminum (Except for 80 & 90A)
Humidity	85% non-condensing
LED Input Status Indicator	Red

MECHANICAL SPECIFICATIONS

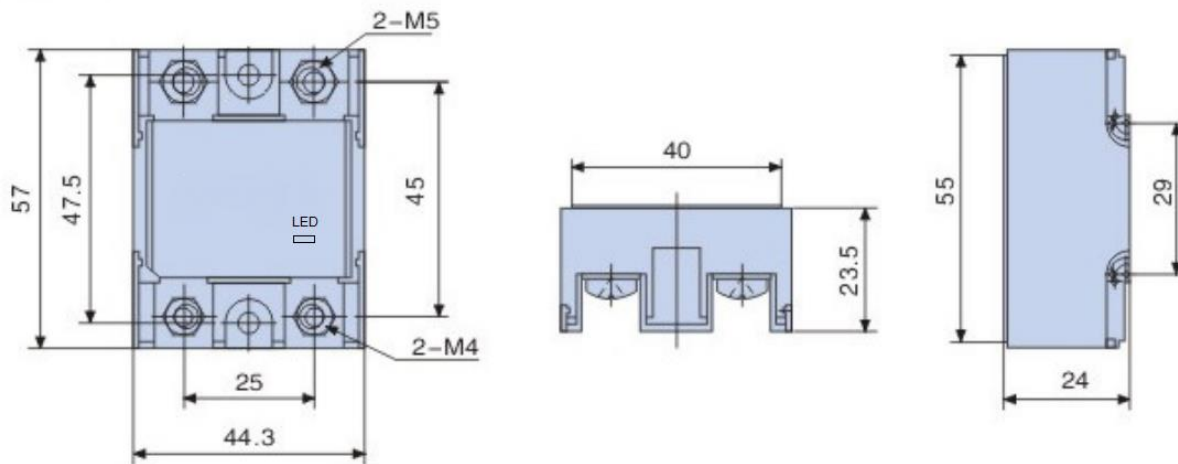

Unit of Length: Millimeters

RECOMMENDED MODEL & HEATSINK

Choosing compatible current is critical in selecting a right model of solid state relay. Our engineers recommend SSR models according to actual applications and internal components of relay. For example, when solid state relay is used for electric heating, because of the cold resistance effect (the resistance value is 60% of heating wire value when it is in cold state), the SSR's current should be 1.67 times bigger than actual working current in order to prevent the over-current of solid state relay. The recommendations for the other types of application are provided in the similar reasons. Heatsink in the table are compatible (size and thermal parameters) with the corresponding SSRs.

Application to Electric Heating

Actual Load Current	0.15A-7A	0.15A-18A	0.15A-22A	0.15A-27A	0.15A-31A	0.15A-40A	0.15A-45A	0.15A-50A
Recommended Model ⁽⁴⁾	SAP2410D-K	SAP2425D-K	SAP2440D-K	SAP2450D-K	SAP2460D-K	SAP2470D-K	SAP2480D-K	SAP2490D-K
Recommended Panel	X50	G60	G60	G80	G100	T80	T110	T110
Recommended Din Rail	CX50	CH60	CH80	CH100	CH120			

Application to Single-Phase Motors

Actual Load Current	0.15A-2A	0.15A-5A	0.15A-7A	0.15A-8A
Recommended Model ⁽⁴⁾	SAP2410D-RK	SAP2425D-RK	SAP2440D-RK	SAP2450D-RK
Recommended Heatsink	Panel Din Rail	No Need Clip	X75 CR75	x75 CR75

Application to Three-Phase Motors⁽⁵⁾

Actual Load Current	0.15A-2A	0.15A-5A	0.15A-6A	0.15A-7A
Recommended Model ⁽⁴⁾	SAP2410D-RK	SAP2425D-RK	SAP2440D-RK	SAP2450D-RK
Recommended Panel Mount Heatsink	No Need	G150	G150	G150

Application to Transformer Loads

Actual Load Current	0.15A-4A	0.15A-10A	0.15A-12A	0.15A-15A
Recommended Model ⁽⁴⁾	SAP2410D-RK	SAP2425D-RK	SAP2440D-RK	SAP2450D-RK
Recommended Heatsink	Panel Din Rail	No Need Clip	X75 CR75	X75 CH60

Application to Solenoid Valves or Contactor Coils

Actual Load Current	0.15A-1.4A	0.15A-3.7A	0.15A-4.5A	0.15A-5.4A
Recommended Model ⁽⁴⁾	SAP2410D-RK	SAP2425D-RK	SAP2440D-RK	SAP2450D-RK
Recommended Heatsink	Panel Din Rail	No Need Clip	No Need Clip	X75 CR75

GENERAL NOTES

- (1) All parameters at 25°C and per section unless otherwise specified.
- (2) Heat sinking required, for derating curves see next page.
- (3) Turn-on time for random turn-on (-R) version is 0.1 msec.
- (4) It is DC control as a default in the recommendation table, but it can be changed to AC control according to demand.
- (5) Each Heatsink is suitable to assemble three solid state relays.

AGENCY APPROVALS

Designed in accordance with the requirements of IEC 62314

