

RoHS Compliant Product  
A suffix of "C" specifies halogen free

## FEATURES


- Trench Barrier Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any

## ORDER INFORMATION

Part Number	Type
SBL10U100DS1	Lead (Pb)-free
SBL10U100DS1-C	Lead (Pb)-free and Halogen-free

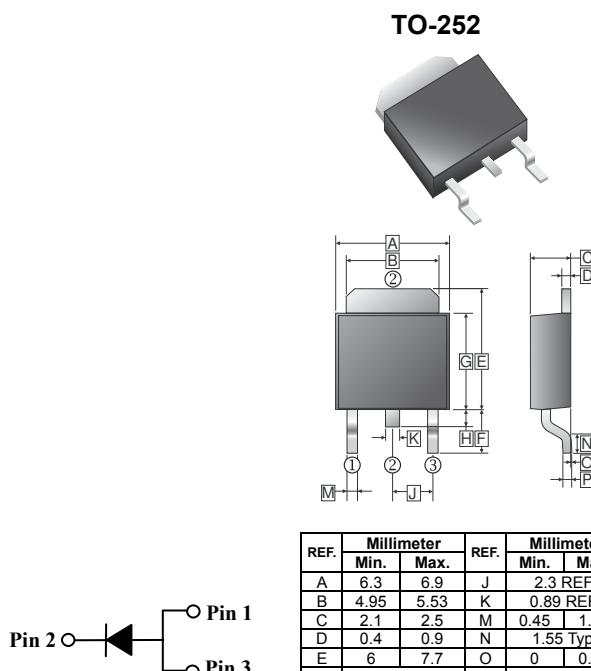

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%).

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	100	V
Working Peak Reverse Voltage	V <sub>RSM</sub>	100	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	V
Maximum Average Forward Rectified Current	I <sub>F</sub>	10	A
Peak Forward Surge Current@ 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150	A
Voltage Rate of Change (Rated V <sub>R</sub> )	dv/dt	10000	V / $\mu$ s
Typical Thermal Resistance from Junction to Case <sup>3</sup>	R <sub>θJC</sub>	6	°C / W
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-40~150	°C


## ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	0.48	0.52	V	I <sub>F</sub> =3A, T <sub>J</sub> =25°C
		0.54	0.58		I <sub>F</sub> =5A, T <sub>J</sub> =25°C
		0.69	0.72		I <sub>F</sub> =10A, T <sub>J</sub> =25°C
		0.63	-		I <sub>F</sub> =10A, T <sub>J</sub> =125°C
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>2</sup>	I <sub>R</sub>	-	0.1	mA	T <sub>J</sub> =25°C
		-	10		T <sub>J</sub> =100°C
Typical Junction Capacitance <sup>1</sup>	C <sub>J</sub>	470	-	pF	


Notes:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test: Pulse width=300 $\mu$ s, duty cycle  $\leq$ 2.0%.
3. Surface mounted on 2.5cm x 2.5cm x 0.5mm copper pad area.

## RATINGS AND CHARACTERISTIC CURVES

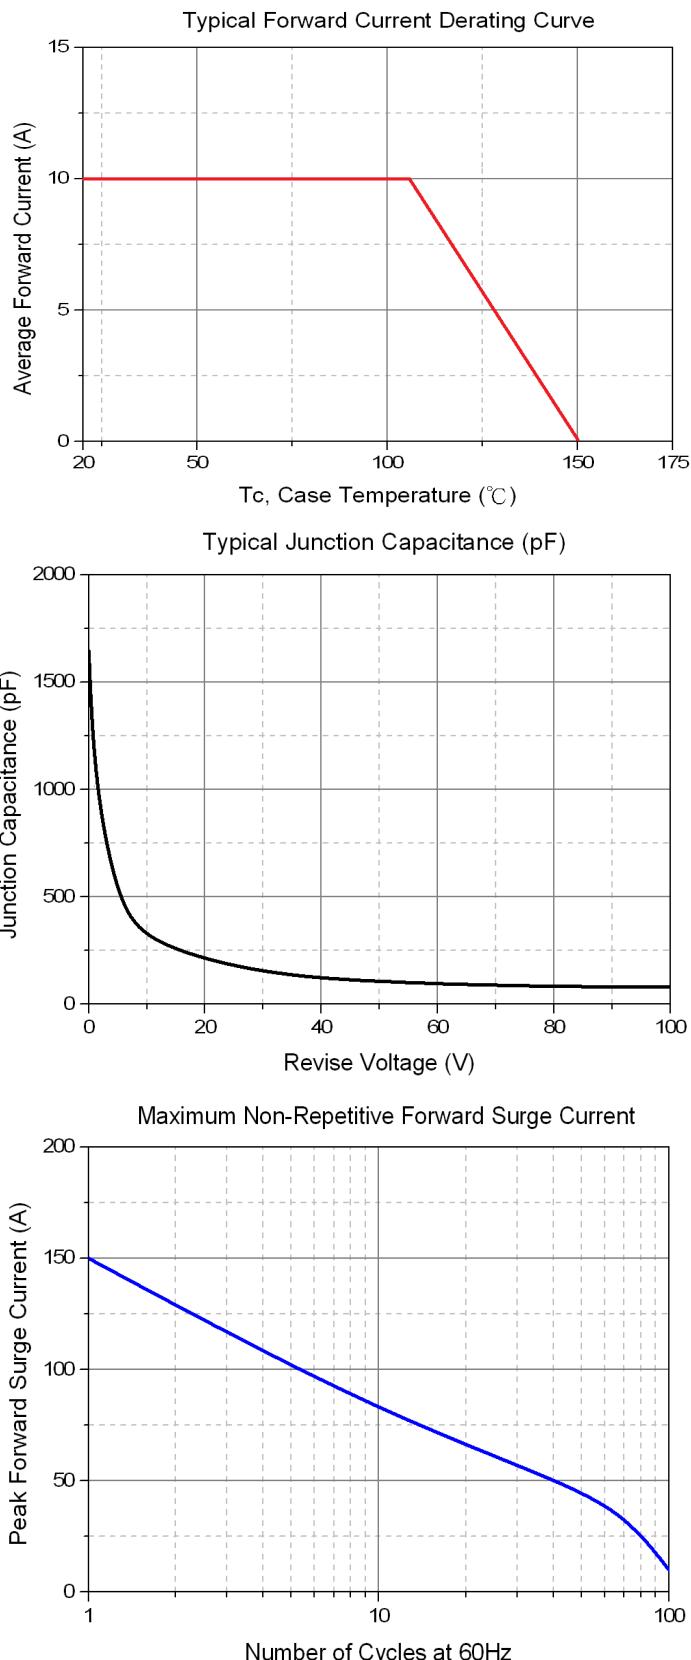

Typical Forward Characteristic

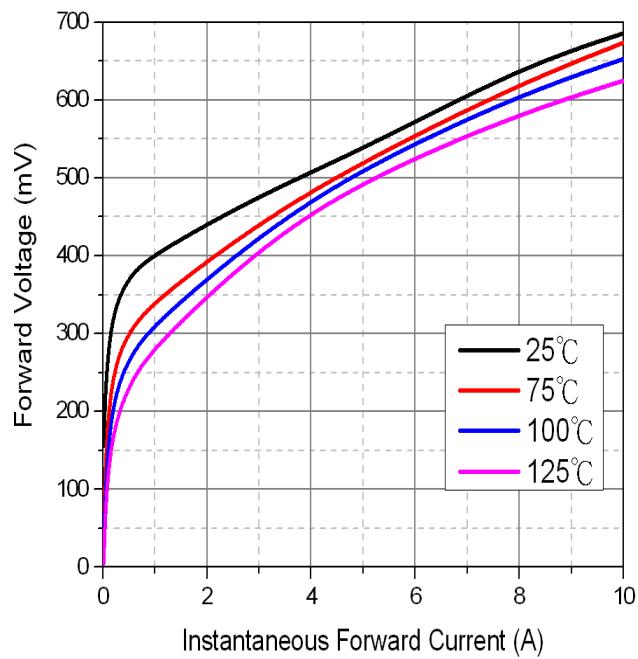

Typical Reverse Characteristic

