




SBL1640CT THRU SBL1660CT

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 40 to 60 Volts

Forward Current - 16 Amperes

TO-220AB

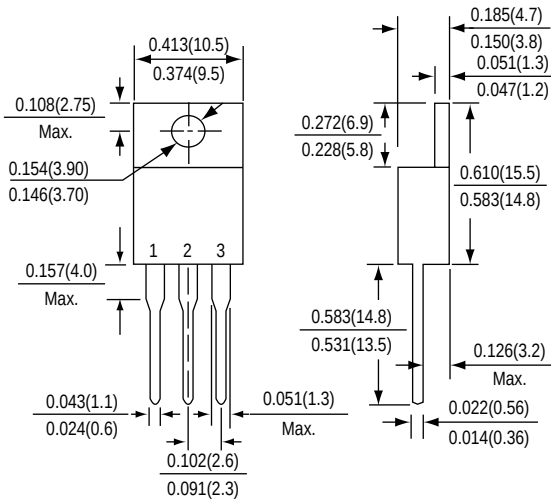

*Dimensions in inches and (millimeters)



FEATURES

- * Lead free product
- * Low forward voltage drop
- * High current capacity
- * High reliability
- * High surge current capability
- * Epitaxial construction
- * Plastic Material-UL Recognition Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC TO-220AB molded plastic body

Terminals : Plated Leads, solderable per
MIL-STD-750, Method 2026

Polarity : Molded on body

Mounting Position : Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	SBL1640CT	SBL1645CT	SBL1660CT	UNITS
Maximum repetitive peak reverse voltage	VRRM	40	45	60	Volts
Maximum RMS voltage	VRMS	28	31	42	Volts
Maximum DC blocking voltage	VDC	40	45	60	Volts
Maximum average forward rectified current at Tc=100°C	I (AV)	16			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	150			Amps
Maximum instantaneous forward voltage IF= @ 8 A	VF	0.55		0.70	Volts
Maximum DC reverse current @Tc=25°C at rated DC blocking voltage @Tc=125°C	IR	0.20 50			mA
Typical junction capacitance (Note 1)	CJ	350			pF
Typical thermal resistance (Note 2)	R θ JC	2.5			°C / W
Operating junction and storage temperature range	TJ,TSTG	-55 to +150			°C

Note : 1. Measured at 1.0MHz and applied reverse voltage of 4.0V.
2. Thermal resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES SBL1640CT THRU SBL1660CT

FIG.1 - FORWARD CURRENT DERATING CURVE

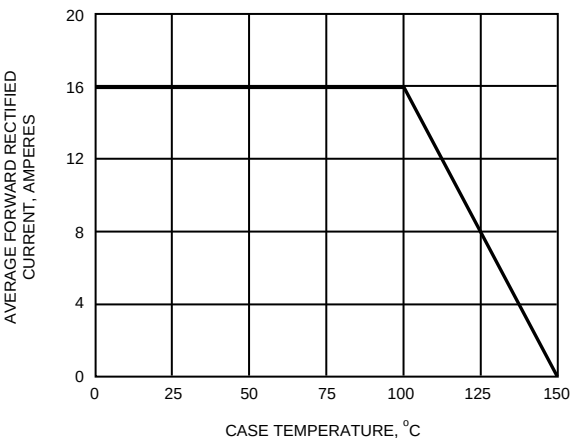


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

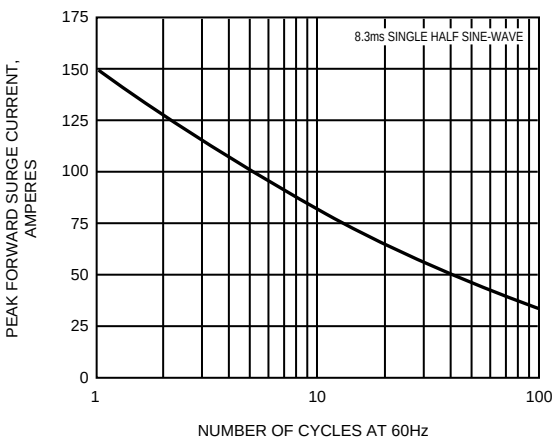


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

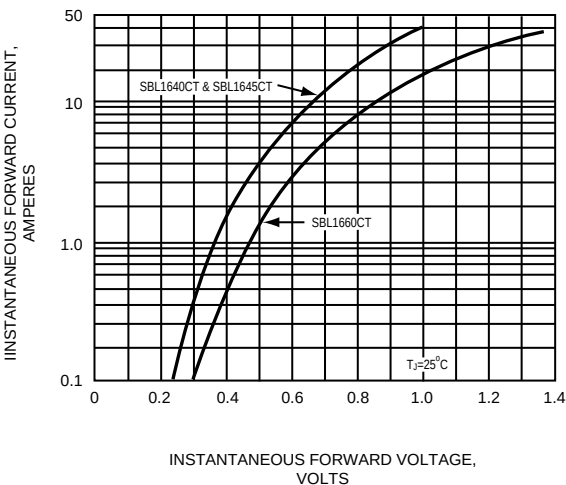


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

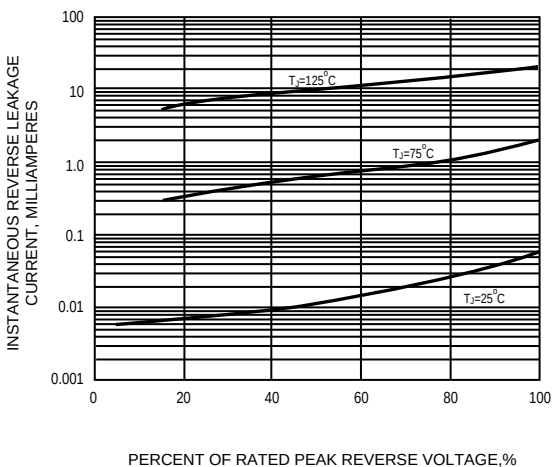


FIG.5 - TYPICAL JUNCTION CAPACITANCE

