

Power Schottky Rectifier - 40Amp 15Volt

Features

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Optimized for OR-ing applications
- Ultra low forward voltage, high current capability
- High surge capacity
- Ultra low power loss, high efficiency

Application

- For the OR-ing of Parallel Power Supplies

Absolute maximum ratings

Symbol	Ratings	Unit	Conditions
I _{F(AV)}	40	A	Average Forward Current
V _{RRM}	15	V	Repetitive Peak Reverse Voltage
I _{FSM}	350	A	Peak Forward Surge Current
V _F	0.30	V	Forward Voltage Drop
T _j	-50 to +125	°C	Operating Temperature
T _{stg}	-50 to +125	°C	Storage Temperature

Electrical characteristics

Parameters	Symbol	Ratings	Conditions
Maximum Instantaneous Forward Voltage	V _F	0.41V 0.30V	I _F = 20A T _c = 25°C T _c = 125°C
Maximum Reverse Leakage Current	I _R	15.0mA 500mA	V _R = 15V T _c = 25°C T _c = 125°C
Maximum Voltage Rate of Change	dv/dt	10,000 V/μs	Rated V _R
Typical Thermal Resistance, Junction to Case	R _{θ(j-c)}	1.25 °C/W	Per diode

TO-247AD

The diagram shows a TO-247AD package with various dimensions labeled A through O. Below the drawing is a diode symbol with terminals A1, A2, and K.

DIMENSIONS					NOTE
DIM	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.748	.827	19.00	21.00	
B	.787	.866	20.00	22.00	
C	.598	.638	15.20	16.20	
D	.130	.150	3.30	3.80	
E	.205	.242	5.20	6.15	
F	.209	.232	5.30	5.90	
G	.077	.091	1.95	2.30	
H	.161	.189	4.10	4.80	
I	.551	.610	14.00	15.50	
J	.045	.055	1.15	1.40	
K	.197	.219	5.00	5.55	
L	.189	.205	4.80	5.20	
M	.020	.031	0.50	0.80	
N	.083	.094	2.10	2.40	
O	.116	.128	2.95	3.25	

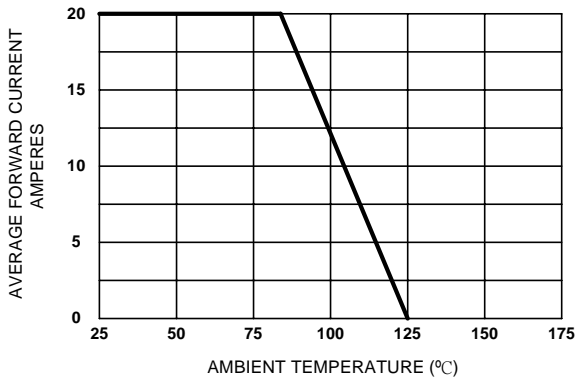


Figure 1. Forward Current Derating Curve

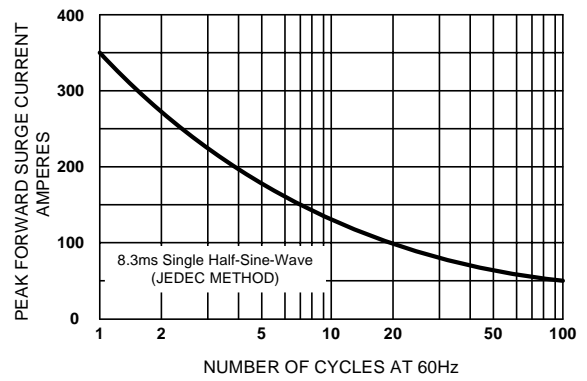


Figure 2. Maximum Non-repetitive Surge Current

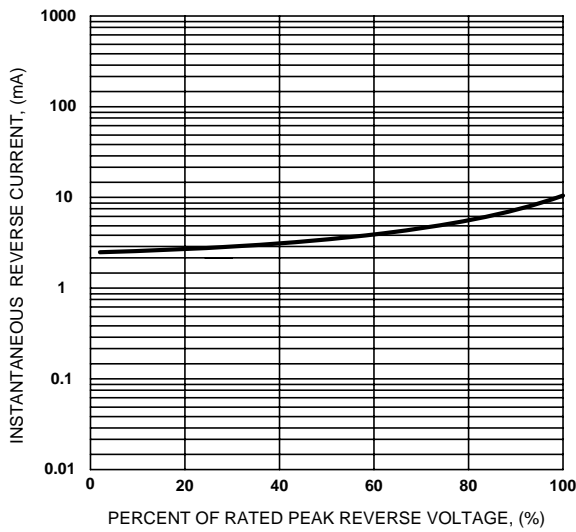


Figure 3. Typical Reverse Characteristics

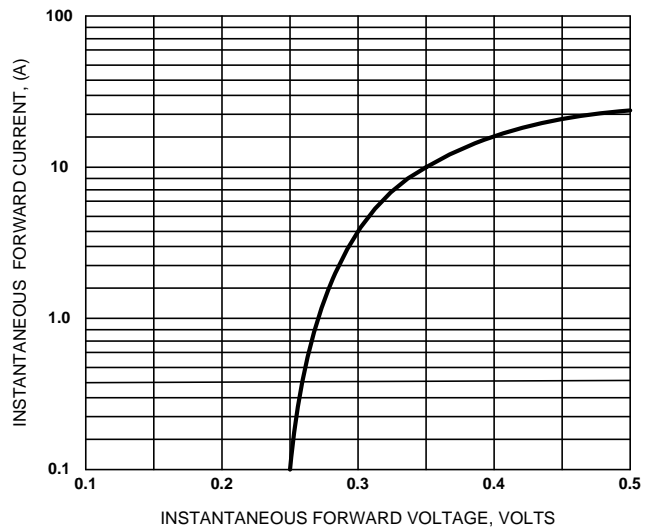


Figure 4. Typical Forward Characteristics

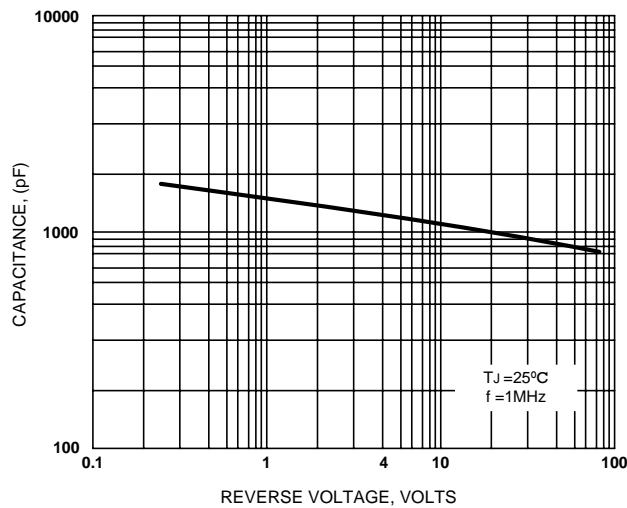


Figure 5. Typical Junction Capacitance



Sirectifier Global Corp., Delaware, U.S.A.

U.S.A.: sgc@sirectsemi.com France: ss@sirectsemi.com Taiwan: se@sirectsemi.com Hong Kong: hk@sirectsemi.com
 China: st@sirectsemi.com Thailand: th@sirectsemi.com Philippines: aiac@sirectsemi.com Belize: belize@sirectsemi.com