

**Power Schottky Rectifier - 40Amp 15Volt**

**Features**

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Optimized for OR-ing applications
- Ultra low forward voltage, high current capability
- High surge capacity
- Ultra low power loss, high efficiency

**Application**

- For the OR-ing of Parallel Power Supplies

**Absolute maximum ratings**

Symbol	Ratings	Unit	Conditions
I <sub>F(AV)</sub>	40	A	Average Forward Current
V <sub>RRM</sub>	15	V	Repetitive Peak Reverse Voltage
I <sub>FSM</sub>	350	A	Peak Forward Surge Current
V <sub>F</sub>	0.30	V	Forward Voltage Drop
T <sub>j</sub>	-50 to +125	°C	Operating Temperature
T <sub>stg</sub>	-50 to +125	°C	Storage Temperature


**Electrical characteristics**

Parameters	Symbol	Ratings	Conditions
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	0.41V 0.30V	I <sub>F</sub> = 20A T <sub>c</sub> = 25°C T <sub>c</sub> = 125°C
Maximum Reverse Leakage Current	I <sub>R</sub>	15.0mA 500mA	V <sub>R</sub> = 15V T <sub>c</sub> = 25°C T <sub>c</sub> = 125°C
Maximum Voltage Rate of Change	dv/dt	10,000 V/μs	Rated V <sub>R</sub>
Typical Thermal Resistance, Junction to Case	R <sub>θ(j-c)</sub>	1.25 °C/W	Per diode


**TO-247AD**

The diagram shows a TO-247AD package with various dimensions labeled A through O. Below the drawing is a diode symbol with terminals A1, A2, and K.


DIMENSIONS					NOTE
DIM	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.748	.827	19.00	21.00	
B	.787	.866	20.00	22.00	
C	.598	.638	15.20	16.20	
D	.130	.150	3.30	3.80	
E	.205	.242	5.20	6.15	
F	.209	.232	5.30	5.90	
G	.077	.091	1.95	2.30	
H	.161	.189	4.10	4.80	
I	.551	.610	14.00	15.50	
J	.045	.055	1.15	1.40	
K	.197	.219	5.00	5.55	
L	.189	.205	4.80	5.20	
M	.020	.031	0.50	0.80	
N	.083	.094	2.10	2.40	
O	.116	.128	2.95	3.25	

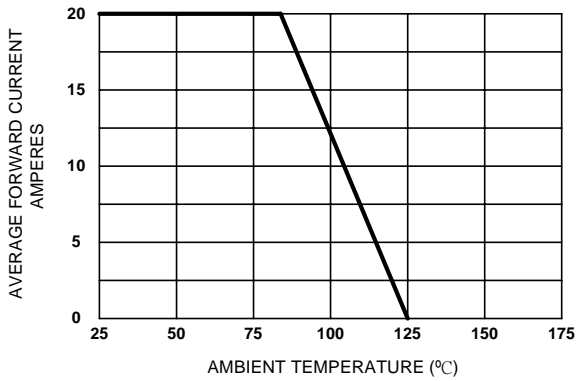


**Figure 1. Forward Current Derating Curve**

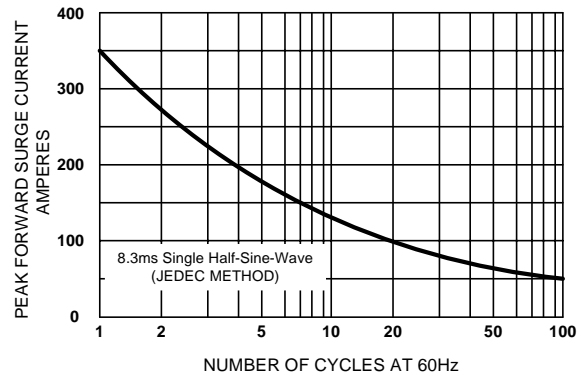


**Figure 2. Maximum Non-repetitive Surge Current**

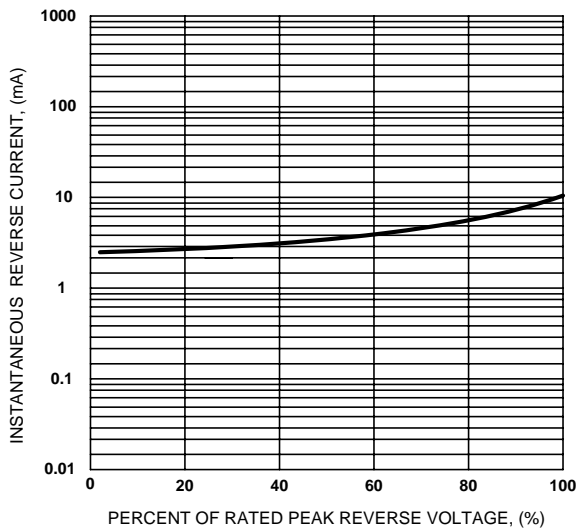

**Figure 3. Typical Reverse Characteristics**

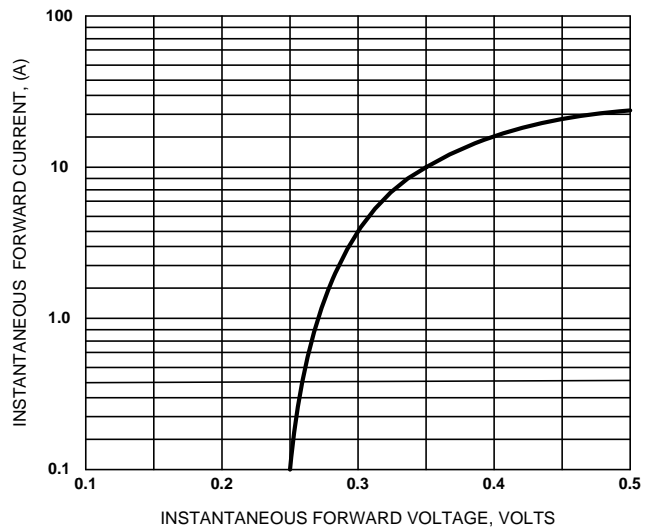

**Figure 4. Typical Forward Characteristics**

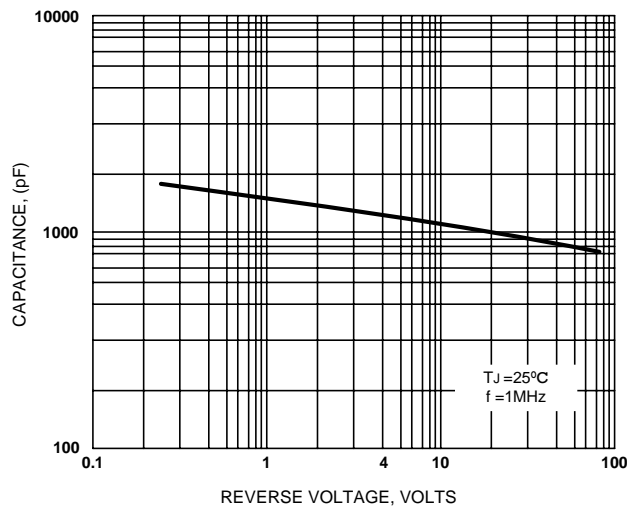

**Figure 5. Typical Junction Capacitance**



Sirectifier Global Corp., Delaware, U.S.A.

U.S.A.: [sgc@sirectsemi.com](mailto:sgc@sirectsemi.com) France: [ss@sirectsemi.com](mailto:ss@sirectsemi.com) Taiwan: [se@sirectsemi.com](mailto:se@sirectsemi.com) Hong Kong: [hk@sirectsemi.com](mailto:hk@sirectsemi.com)  
 China: [st@sirectsemi.com](mailto:st@sirectsemi.com) Thailand: [th@sirectsemi.com](mailto:th@sirectsemi.com) Philippines: [aiac@sirectsemi.com](mailto:aiac@sirectsemi.com) Belize: [belize@sirectsemi.com](mailto:belize@sirectsemi.com)