

SBR02M30LP

0.2A SBR[®] Super Barrier Rectifier

Features

- Ultra Low Leakage Current
- Excellent High Temperature Stability
- Patented Super Barrier Rectifier Technology
- Soft, Fast Switching Capability
- 175°C Operating Junction Temperature
- **Lead Free Finish, RoHS Compliant (Note 1)**
- **“Green” Molding Compound (No Br, Sb)**

Mechanical Data

- Case: DFN1006-2
- Case Material: Molded Plastic, “Green” Molding compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Polarity Indicator: Cathode Dot
- Terminals: Finish - NiPdAu annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208 **(e3)**
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.001 grams (Approx.)

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.







Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _{RM}		
RMS Reverse Voltage	V _{R(RMS)}	21	V
Average Rectified Output Current (See Figure 1)	I _O	0.2	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	5.0	A
Maximum Thermal Resistance	R _{θJS}	18	°C/W
Thermal Resistance Junction to Soldering (Note 2)	R _{θJA}	263	
Thermal Resistance Junction to Ambient (Note 3)			
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +175	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 4)	V _{(BR)R}	30	-	-	V	I _R = 400 μA
Forward Voltage Drop	V _F	-	0.50	0.54	V	I _F = 0.1A, T _J = 25°C
			0.42	0.45		I _F = 0.1A, T _J = 150°C
			0.57	0.61		I _F = 0.2A, T _J = 25°C
			0.51	0.54		I _F = 0.2A, T _J = 150°C
Leakage Current (Note 4)	I _R	-	0.1	0.5	μA	V _R = 30V, T _J = 25°C V _R = 30V, T _J = 150°C

- Notes:
1. RoHS revision 13.2.2003. High temperature solder exemption applied, see *EU Directive Annex Note 7*.
 2. Theoretical R_{θJS} calculated from the top center of the die straight down to the PCB cathode tab solder junction.
 3. FR-4 PCB, 2oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.
 4. Short duration pulse test used to minimize self-heating effect.

SBR02M30LP

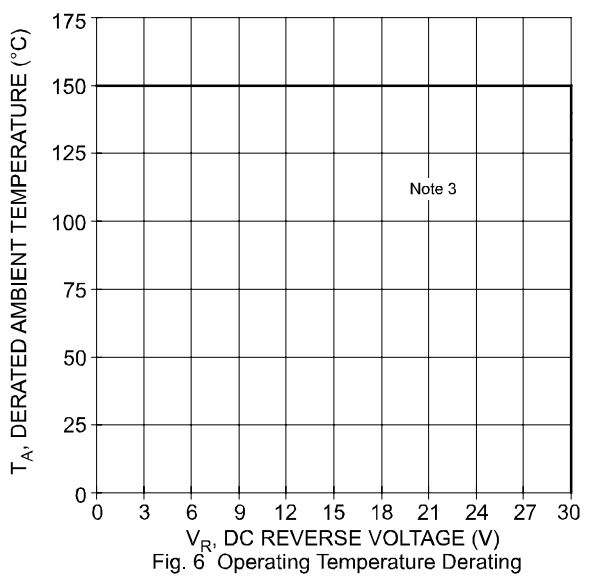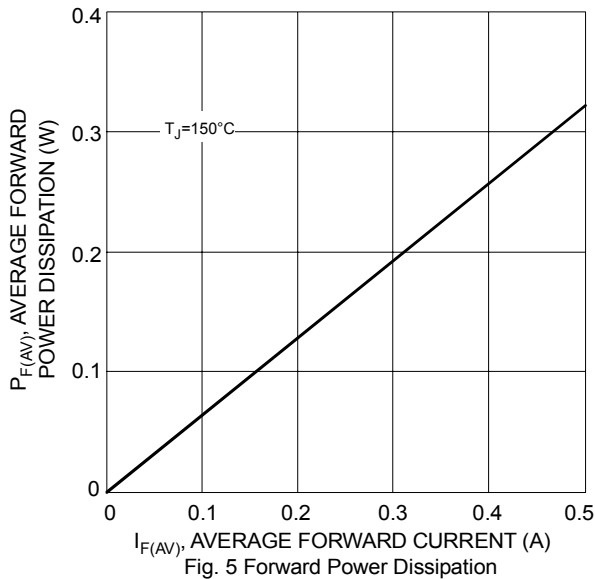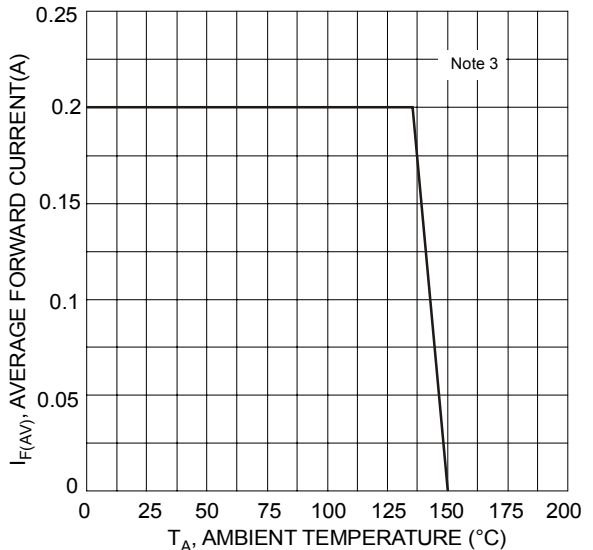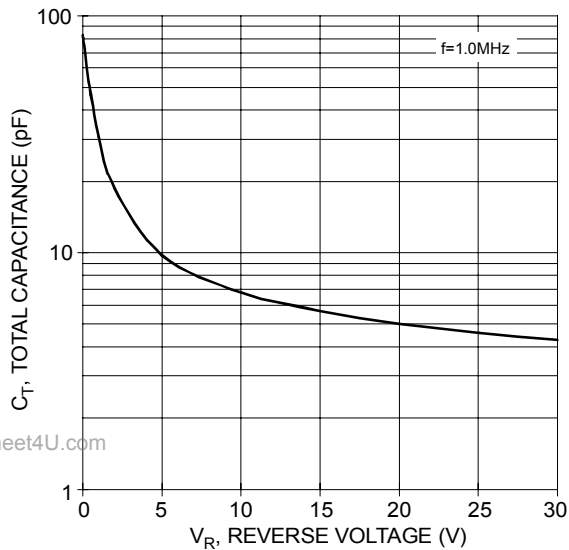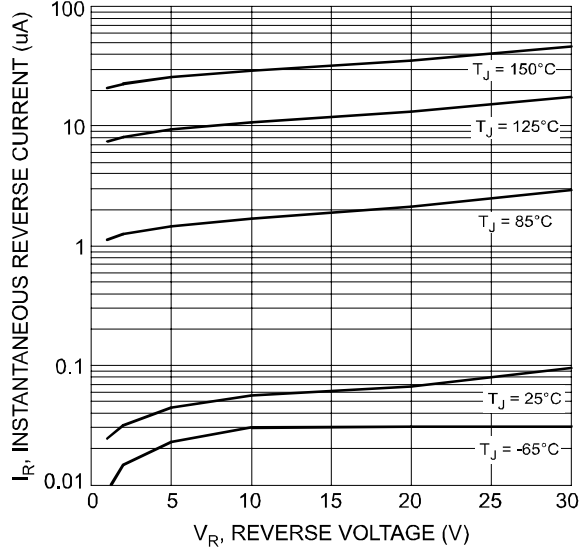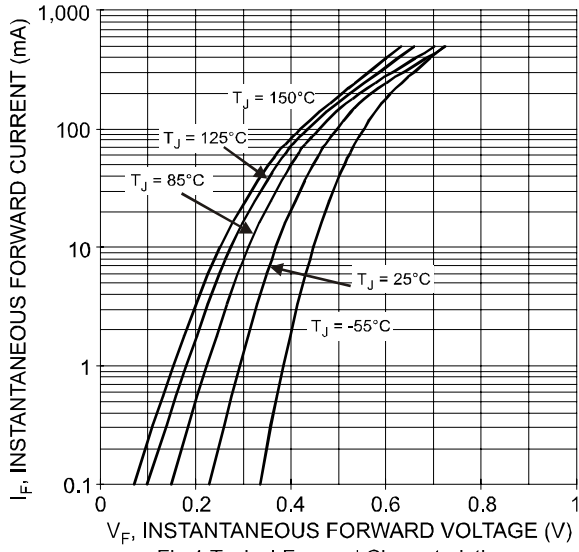


www.DataSheet4U.com

SBR02M30LP

NEW PRODUCT

Package Outline Drawing

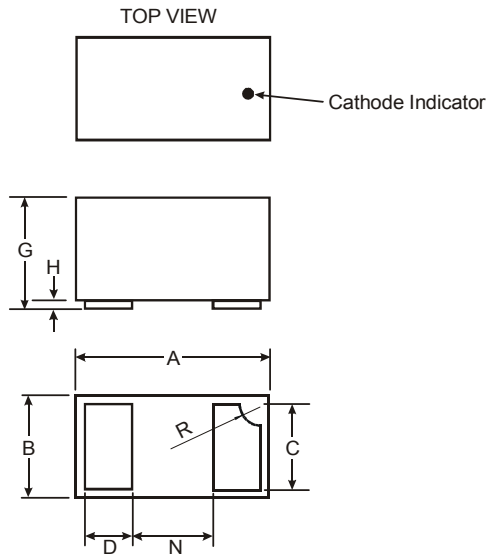

DFN1006-2			
Dim	Min	Max	Typ
A	0.95	1.075	1.00
B	0.55	0.675	0.60
C	0.45	0.55	0.50
D	0.20	0.30	0.25
G	0.47	0.53	0.50
H	0	0.05	0.03
N	—	—	0.40
R	0.05	0.15	0.10
All Dimensions in mm			


Marking, Polarity, Weight & Ordering Information

SBR02M30LP	Case Style (DFN1006-2)		Marking	Weight
	 Top View	 Back View		0.001g (approx.)

Ordering Information	Date Code
SBR02M30LP-7 3000/Tape & Reel	23 = Product Type Marking Code Dot Denotes Cathode Side

Suggested Pad Layout

NEW PRODUCT

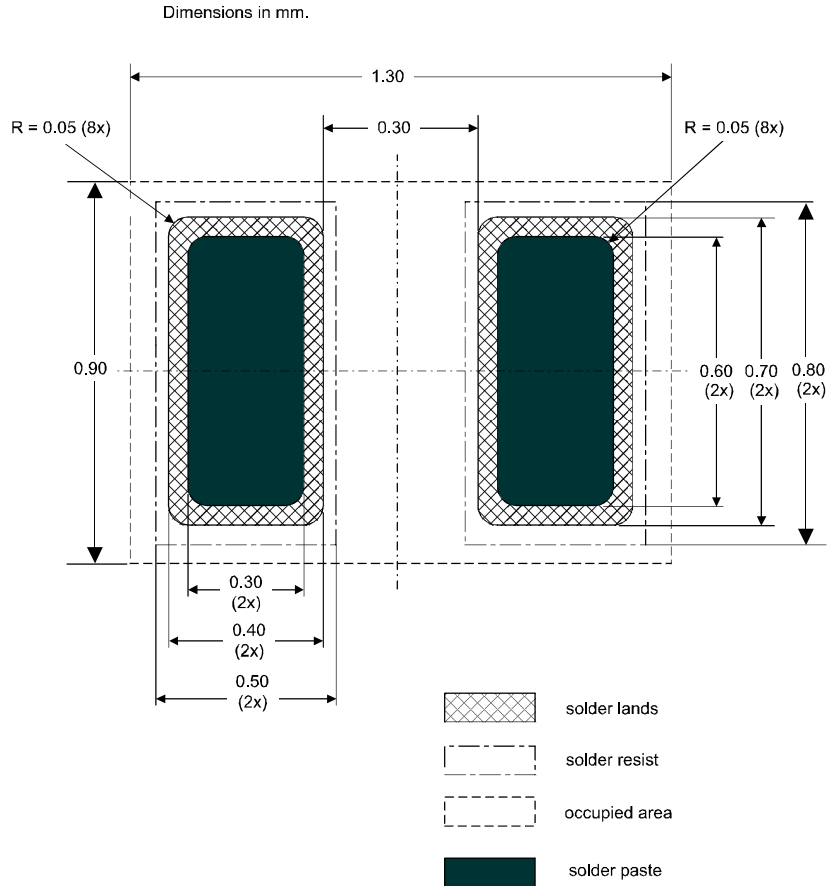

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.