

### POWER MANAGEMENT

#### Description

SC4625 is a BiCMOS integrated FET, synchronous, 0.5A step-down regulator. It operates at the typical switching frequency of 1.7MHz and enables the user to choose a very small and inexpensive external output inductor and capacitor.

Fully internally compensated current-mode control loop provides a fast transient response and ensures excellent line and load regulation. The SC4625 operates from 2.5V to 5.5V, features internal P-MOS and N-MOS power switches and is implemented as a current-mode pulse-width-modulated (PWM) control scheme.

Multiple modes of operation are available to achieve high performance and efficiency and makes the SC4625 ideally suited for electronic devices where size is at premium. These modes are: PWM fixed frequency, synchronous and asynchronous load dependent, pulse-skipping at very light load, and low-dropout 100% duty cycle mode, by continuously turning on the upper P-MOSFET.


#### Features

- ◆ Fully integrated MOSFET switches and compensation
- ◆ 1.7MHz fixed frequency operation
- ◆ Input voltage range: 2.5V to 5.5V
- ◆ Adjustable output voltage from 0.5V to  $V_{IN}$
- ◆ Pulse-skipping mode operation at light load
- ◆ 100% duty cycle in low-dropout mode
- ◆ Over-temperature shutdown
- ◆ MLP-10 lead free package. This product is fully WEEE and RoHS compliant
- ◆ -40°C to +125°C junction temperature range

#### Applications

- ◆ WLAN and Bluetooth® applications
- ◆ Distributed Power Systems
- ◆ Micro DC-DC converters
- ◆ USB-based DSL modems
- ◆ Point-of-Load Regulation
- ◆ FPGA Core and I/O Supplies
- ◆ Set-top Boxes
- ◆ Battery-powered devices (1 Li-Ion or 3 NiMH/NiCd)

#### Typical Application Circuit

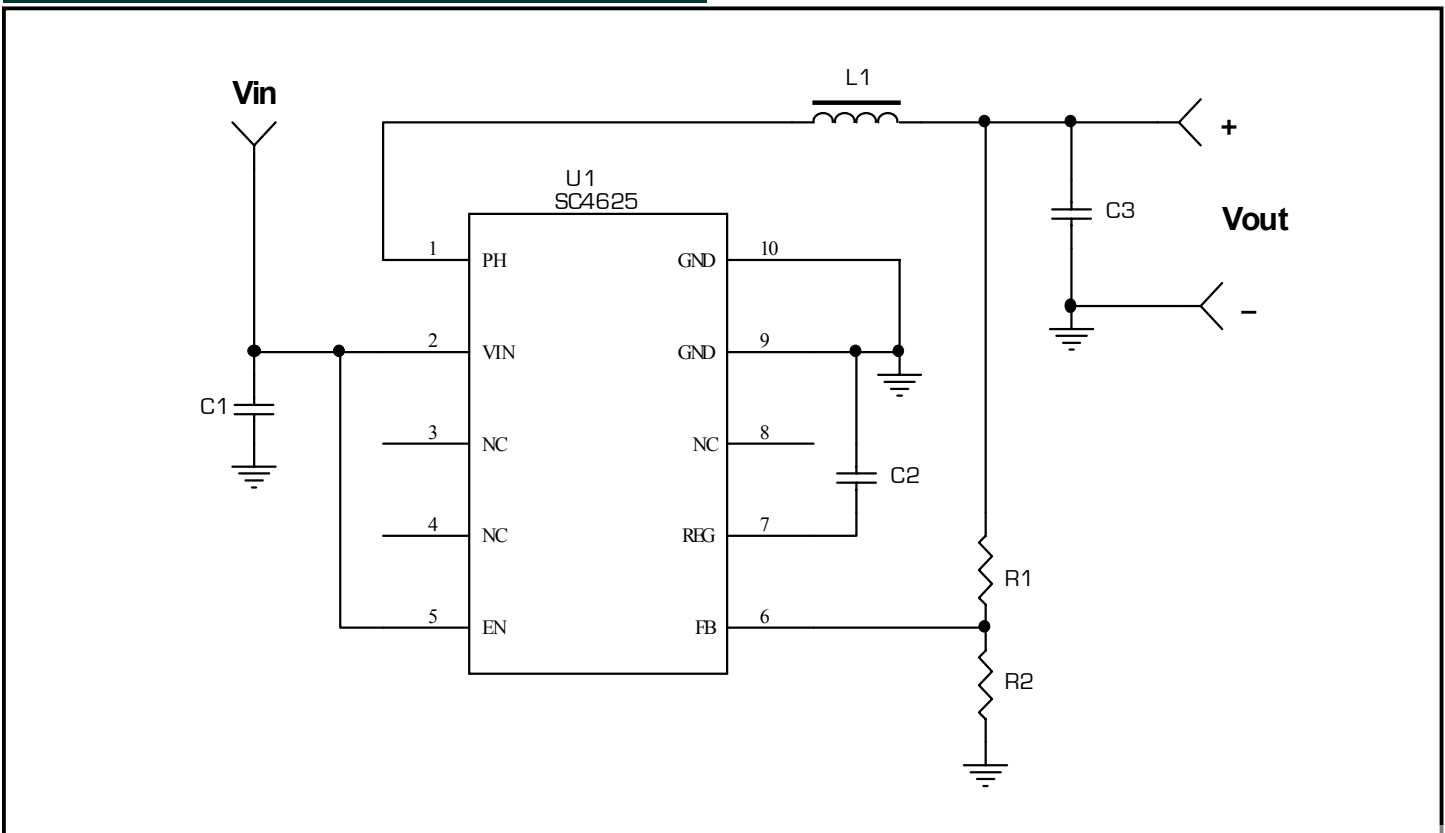

**POWER MANAGEMENT**
[www.DataSheet4U.com](http://www.DataSheet4U.com)
**Absolute Maximum Ratings**

Exceeding the specifications below may result in permanent damage to the device, or device malfunction. Operation outside of the parameters specified in the Electrical Characteristics section is not implied.

Parameter	Symbol	Maximum	Units
Supply Voltage	$V_{IN}$	-0.3 to 6	V
Output Switch Voltage	$V_{PH}$	-0.3 to 6	V
Voltage at EN and FB		-0.3 to $V_{IN} + 0.3$	V
Continuous Output Current		1	A
Power Dissipation	PD	Internally limited	A
Thermal Resistance Junction to Ambient	$\theta_{JA}$	60	°C/W
Operating Junction Temperature Range	$T_J$	-40 to +125	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C
IR Reflow Temperature (10 - 40s)	TPKG	+260	°C
ESD Rating (Human Body Model)		2	kV

**Electrical Characteristics**

Unless otherwise specified:

$$V_{IN} = 3.3V, V_O = 1.25V, I_O = 300mA; -40^{\circ}C \leq T_J = T_A \leq +125^{\circ}C.$$

Parameter	Test Conditions	Min	Typ	Max	Units
Supply Voltage Range		2.5		5.5	V
Quiescent Current	$EN = V_{IN}, V_{FB} = 0.6V$ (not switching)		450		$\mu A$
	$EN = 0V$		0.1		$\mu A$
Regulated Feedback Voltage		487	500	513	mV
Output Voltage Line Regulation	$V_{IN} = 3.0V$ to $3.6V, I_{LOAD} = 300mA,$ $T_J = T_A = 25^{\circ}C$		0.2	0.5	%
Output Voltage Load Regulation	$10mA < I_{LOAD} < 500mA, T_J = T_A = 25^{\circ}C$			0.6	%
Maximum Duty Cycle	$V_{FB} = 0.4V$	100			%
Current Limit	$V_{FB} = 0.4V$	0.6	0.8	1.0	A
Switch ON-Resistance	$I_{PH} = 300mA, V_{FB} = 0.4V$		0.6		$\Omega$
	$I_{PH} = -300mA, V_{FB} = 0.6V$		0.6		$\Omega$
Oscillator Frequency	$T_J = T_A = 25^{\circ}C$	1.55	1.7	1.85	MHz

**POWER MANAGEMENT**[www.DataSheet4U.com](http://www.DataSheet4U.com)**Electrical Characteristics**

Unless otherwise specified:


 $V_{IN} = 3.3V$ ,  $V_O = 1.25V$ ,  $I_O = 300mA$ ;  $-40^{\circ}C \leq T_J = T_A \leq +125^{\circ}C$ .

Parameter	Test Conditions	Min	Typ	Max	Units
Enable Input Current			0.1		$\mu A$
Enable Threshold, High		1.6			V
Enable Threshold, Low				0.4	V
Over-Temperature Shutdown			160		$^{\circ}C$
Over-Temperature Shutdown Hysteresis			15		$^{\circ}C$

**POWER MANAGEMENT**

[www.DataSheet4U.com](http://www.DataSheet4U.com)

**Pin Configuration**

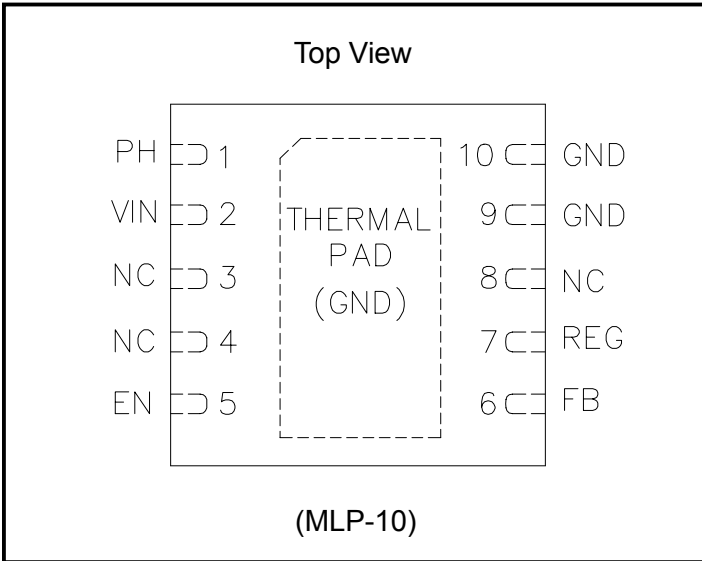

**Ordering Information**

Part Number	Package <sup>(1)</sup>	Temp. Range (T <sub>j</sub> )
SC4625MLTRT <sup>(2)</sup>	MLP-10	-40°C to +125°C

**Notes:**


(1) Only available in tape and reel packaging. A reel contains 2500 devices.

(2) Lead free product. This product is fully WEEE and RoHS compliant.


**Pin Descriptions**

Pin #	Pin Name	Pin Function
1	PH	Phase Node. Internal power MOSFETs output.
2	VIN	Supply voltage. Requires bypass capacitor to GND.
3, 4, 8	NC	Not connected.
5	EN	A low level EN will power down the device.
6	FB	Input to the error amplifier, connect to the external resistor divider network to set the output voltage.
7	REG	Internal regulator. Must be bypassed to GND with a 0.01µF capacitor.
9, 10	GND	Ground. Both pins to be tied together.
THERMAL PAD	GND	Pad for heatsinking purposes. Connect to ground plane using multiple vias.


**Marking Information**

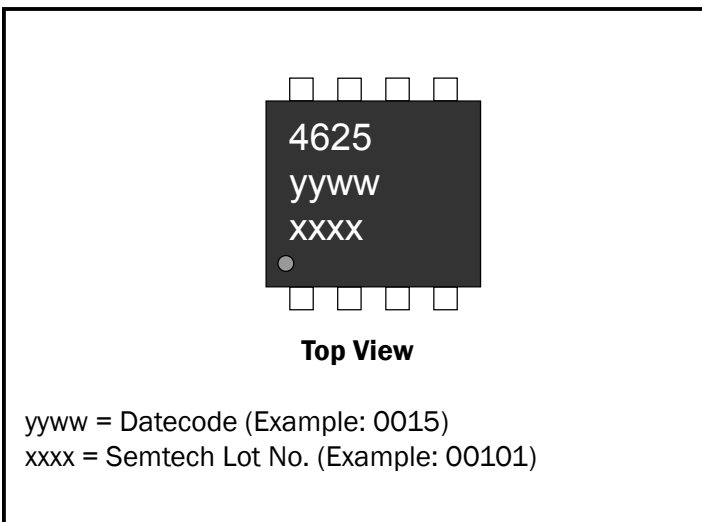


**Block Diagram**

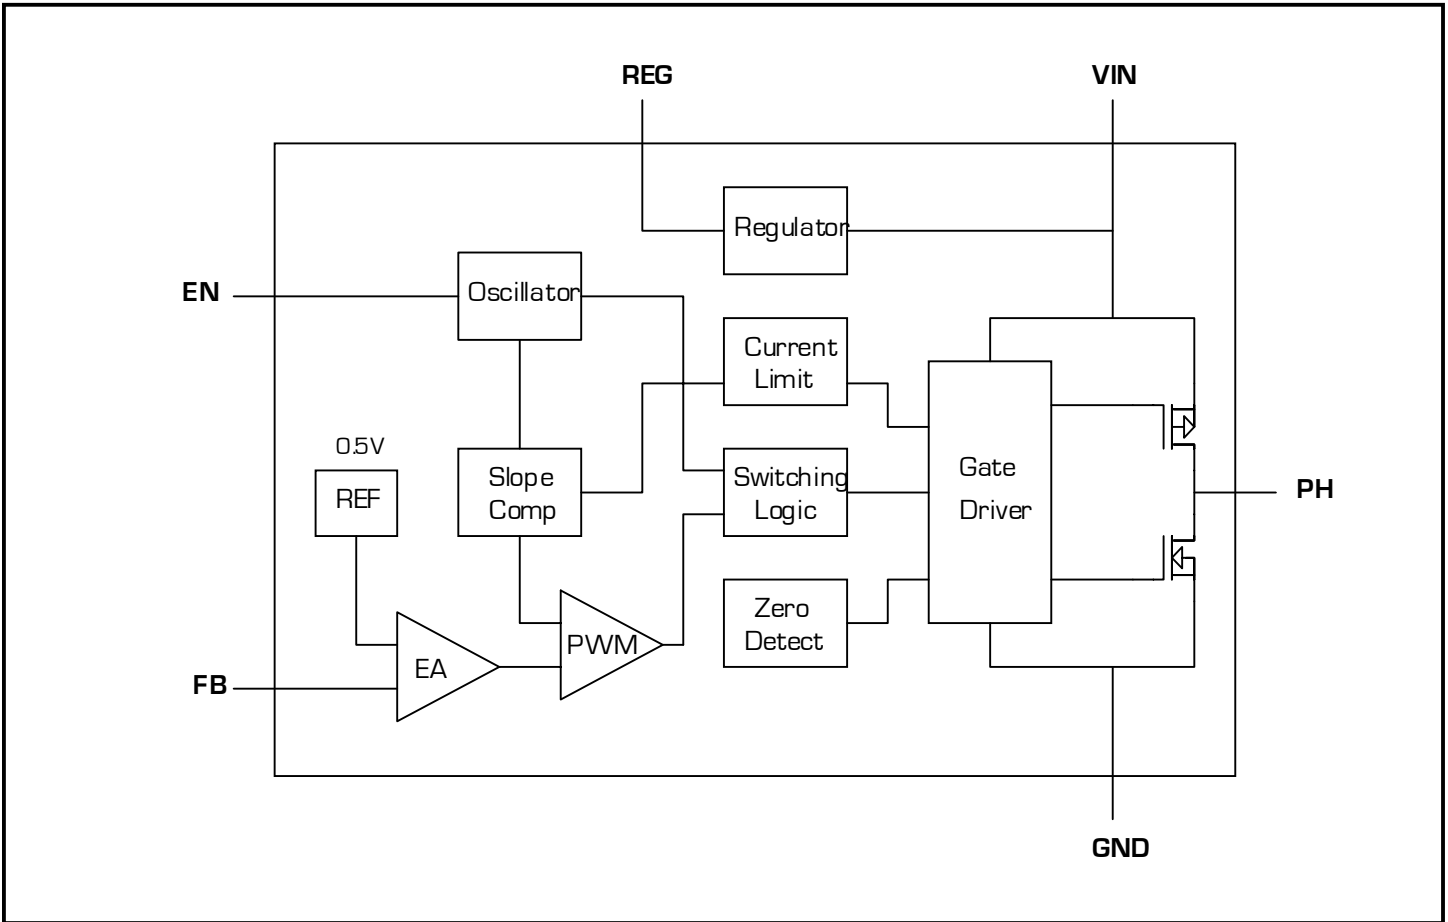


**Application Schematic**

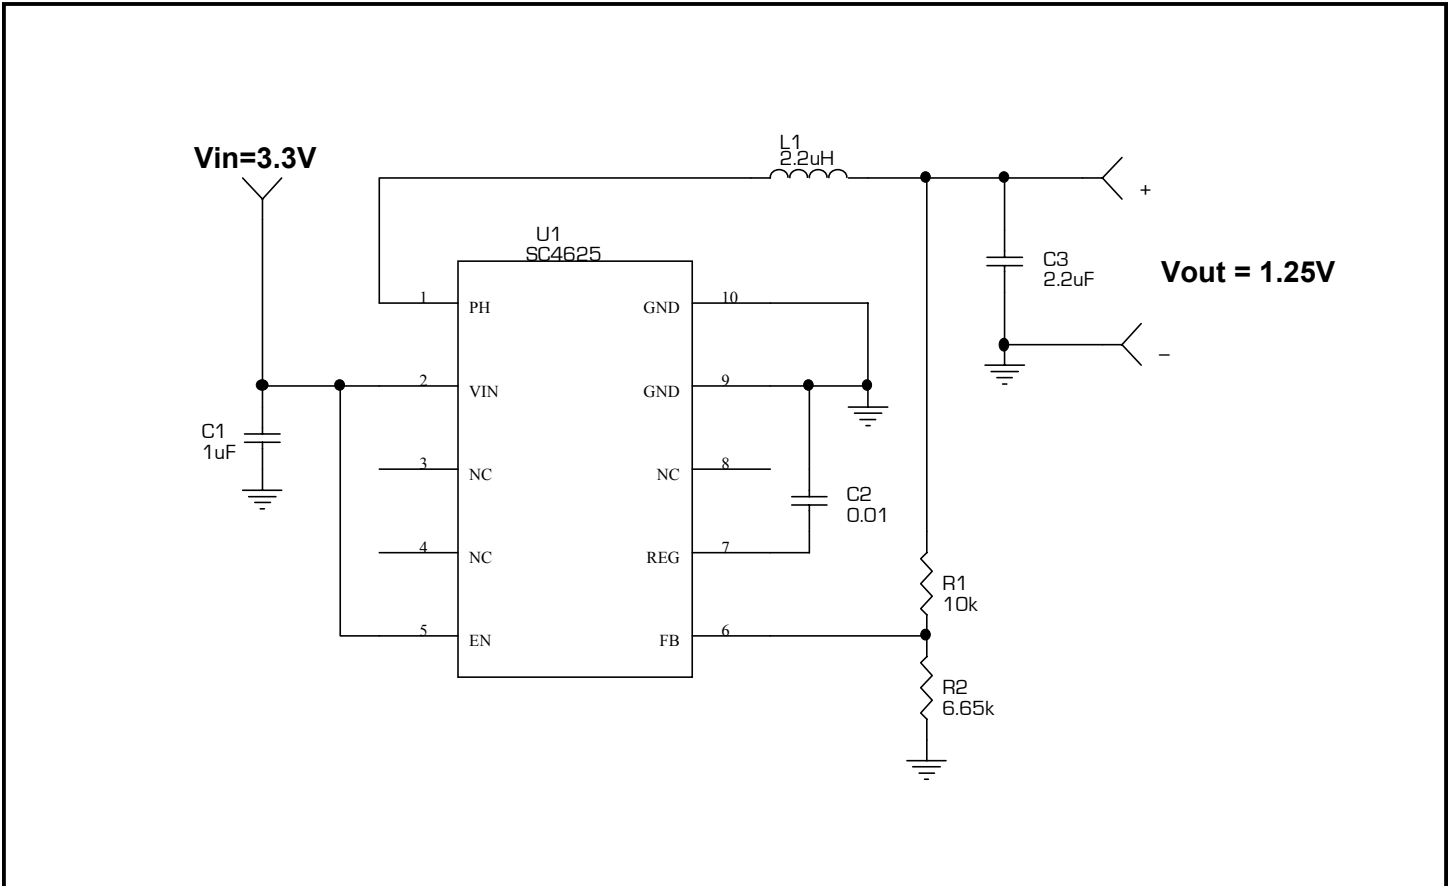

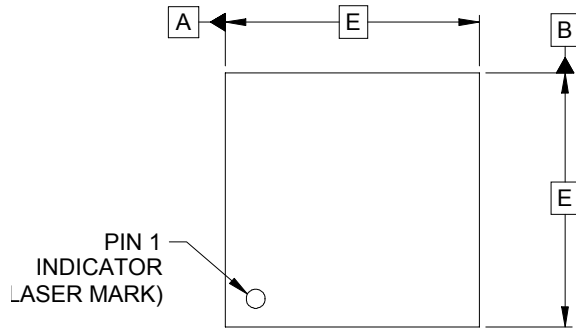

DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.031	-	.039	0.80	-	1.00
A1	.000	-	.002	0.00	-	0.05
A2	-	(.008)	-	-	(0.20)	-
b	.007	.009	.011	0.18	0.23	0.30
C	.074	.079	.083	1.87	2.02	2.12
D	.042	.048	.052	1.06	1.21	1.31
E	.114	.118	.122	2.90	3.00	3.10
e	.020 BSC			0.50 BSC		
L	.012	.016	.020	0.30	0.40	0.50
N	10			10		
aaa	.003			0.08		
bbb	.004			0.10		

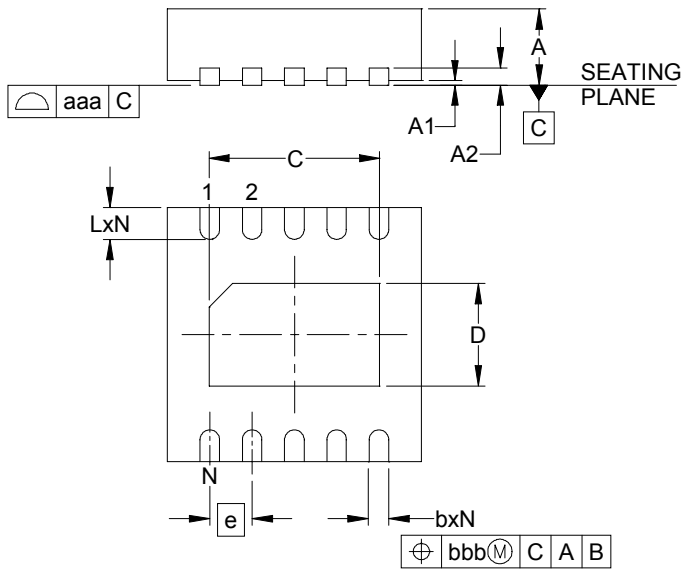


NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS TERMINALS.

**POWER MANAGEMENT**

www.DataSheet4U.com

**Land Pattern - MLP-10**

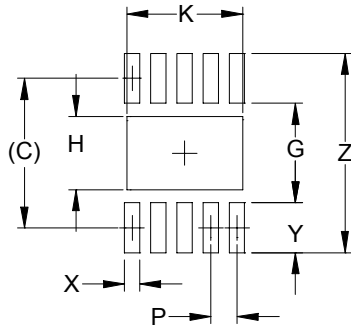

DIMENSIONS		
DIM	INCHES	MILLIMETERS
C	(.112)	(2.85)
G	.075	1.90
H	.055	1.40
K	.087	2.20
P	.020	0.50
X	.012	0.30
Y	.037	0.95
Z	.150	3.80

**NOTES:**

1. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.

**Contact Information**

Semtech Corporation  
 Power Management Products Division  
 200 Flynn Road, Camarillo, CA 93012  
 Phone: (805)498-2111 FAX (805)498-3804