

January 8, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

HIGH DENSITY, HIGH VOLTAGE, STANDARD RECOVERY RECTIFIER ASSEMBLY

QUICK REFERENCE DATA


- High reverse voltages
- Low reverse leakage current
- Low distributed and ground capacitance
- Corona free design
- Air or oil environments

- $V_R = 12\text{kV} - 25\text{kV}$
- $I_F = 1.0\text{A}$
- $t_{rr} = 2.0\mu\text{S}$
- $I_R = 1.0\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS

	Symbol	SCKV12K30	SCKV18K30	SCKV25K30	Unit
Working reverse voltage	V_{RWM}	12	18	25	kV
Surge reverse voltage	V_{RSM}	13.2	19.8	27.5	kV
Average forward current in air @ 25°C	$I_{F(AV)}$	← 1.00 →			A
in oil @ 55°C		← 2.00 →			A
in forced air 600 CFM		← 1.50 →			A
Non-repetitive surge current $t_p = 8.3\text{ms}$, @ 25°C	I_{FSM}	← 50.0 →			A
Storage temperature range	T_{STG}	← -55 to +150 →			°C
Operating temperature range	T_{OP}	← -55 to +150 →			°C
Body length Max.	dim B	4.53	6.66	8.78	inches

MECHANICAL

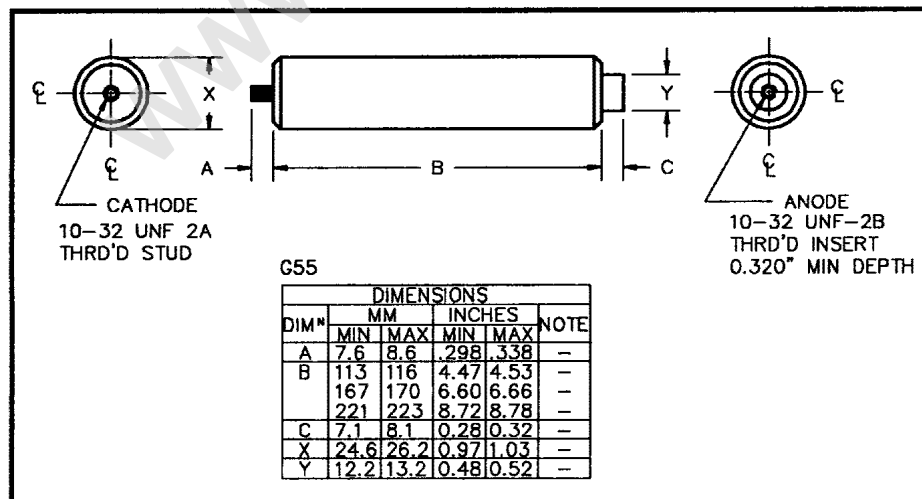

January 8, 1998

ELECTRICAL CHARACTERISTICS

	Symbol	SCKV12K30	SCKV18K30	SCKV25K30	Unit
Max. forward voltage drop @ $I_F = 1.0A, T_j = 25^\circ C$	V_F	13.2	20.9	27.5	V
Max. reverse leakage current @ $V_{RWM}, T_j = 25^\circ C$	I_R	←—————	1.0 —————→		μA
@ $V_{RWM}, T_j = 100^\circ C$	I_R	←—————	25 —————→		μA
Max. reverse recovery time 0.5A I_F to 1.0A I_R . Recovers to 0.25A I_{RR} .	t_{rr}	←—————	2.0 —————→		μS
Max. fusing current $t_p = 8.3mS$	I^2t	←—————	10.4 —————→		A^2S

1. Measured on discrete devices prior to assembly

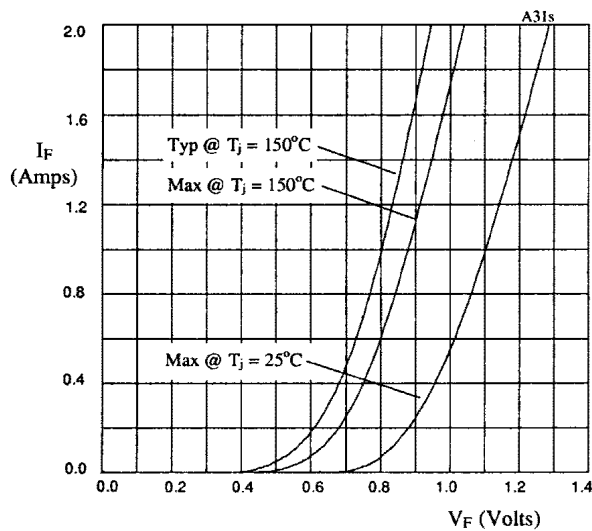


Fig 1. Forward voltage drop as a function of forward current for use with multiplication table.

Multiplication tables for fig 1.

SCKV12K30	X-axis x12
SCKV18K30	X-axis x19
SCKV25K30	X-axis x25

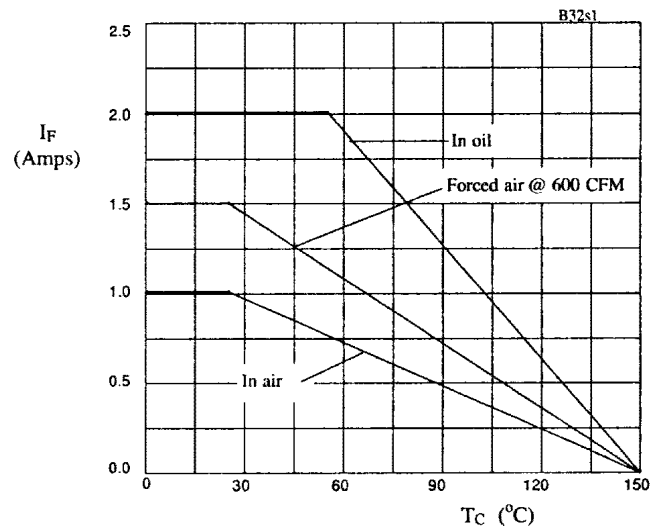


Fig 2. Maximum average forward current against ambient temperature.