

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

## FEATURES

- High Current Capability
- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering: 250°C for 10 Seconds at Terminals
- Low Forward Voltage

## MECHANICAL DATA

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Lead: Solderable Per MIL-STD-202, Method 208 Guaranteed
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any


## MARKING

XZ


## PACKAGE INFORMATION

Package	MPQ	Leader Size
SOD-123	3K	7 inch

### SOD-123

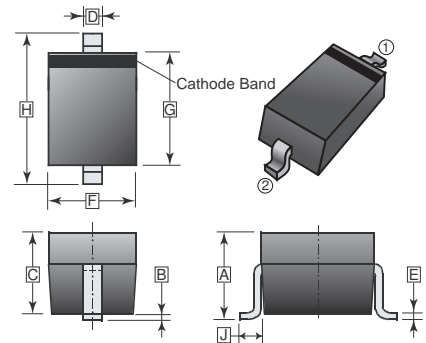

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.94	1.35	F	1.40	1.80
B	0.10 REF.		G	2.54	2.85
C	1.00	1.30	H	3.55	3.86
D	0.30	0.78	J	0.50 REF.	
E	0.08	0.25			



## ORDER INFORMATION

Part Number	Type
SCS1200P-C	Lead (Pb)-free and Halogen-free

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.)


Parameter	Symbol	Ratings	Units
Peak Repetitive Peak Reverse Voltage	$V_{RRM}$	200	V
Working Peak Reverse Voltage	$V_{RWM}$	200	
Maximum DC Blocking Voltage	$V_{DC}$	200	
Average Forward Current @ $T_J=25^\circ\text{C}$	$I_{F(AV)}$	1	A
Peak Forward Current @ 8.3ms Half Sine	$I_{FSM}$	10	A
Maximum Instantaneous Forward Voltage @ $I_{FM}=1\text{A}$ , $T_A=25^\circ\text{C}$	$V_F$	0.9	V
Maximum DC Reverse Current <sup>3</sup> @ Rated DC Blocking Voltage @ $T_J=25^\circ\text{C}$	$I_R$	0.2	mA
Typical Junction Capacitance <sup>1</sup>	$C_J$	30	pF
Typical Thermal Resistance <sup>2</sup>	$R_{\theta JA}$	310	°C/W
Operating and Storage Temperature Range	$T_J$ , $T_{STG}$	-55~150	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 0V D.C.
2. Thermal Resistance Junction-Ambient. FR-4 PCB, 2oz. 0.7mmx1.2mm copper pad.
3. Pulse test: 300µs pulse width, 1% duty cycle.

**RATINGS AND CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

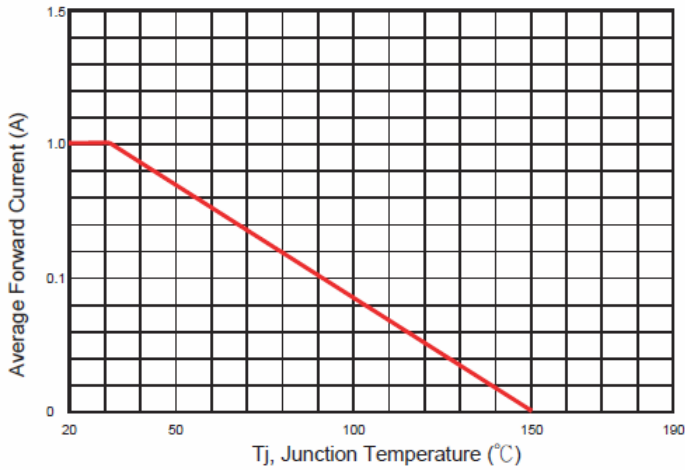


Typical Forward Characteristic

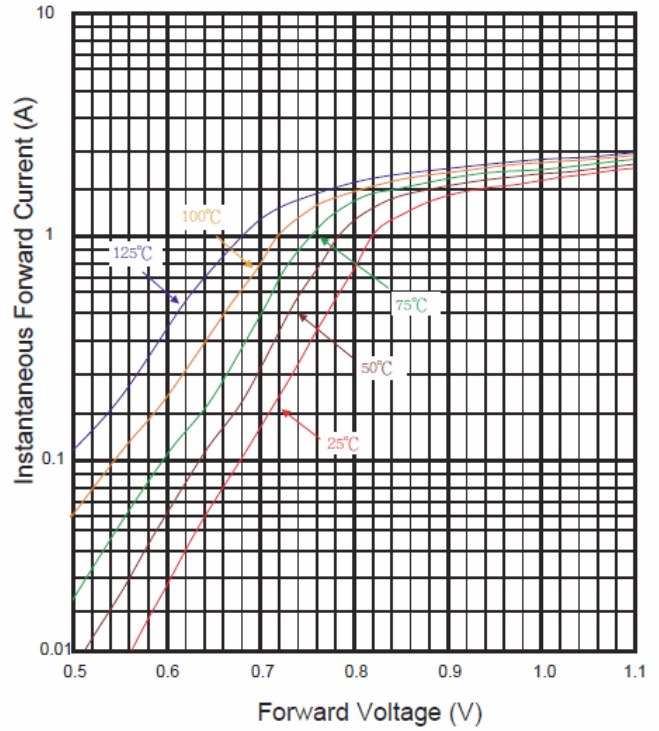

Maximum Non- Repetitive Forward Surge Current

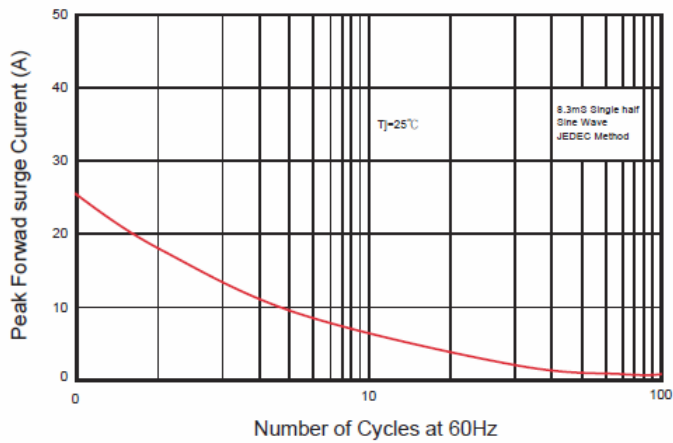

Typical Reverse Characteristic

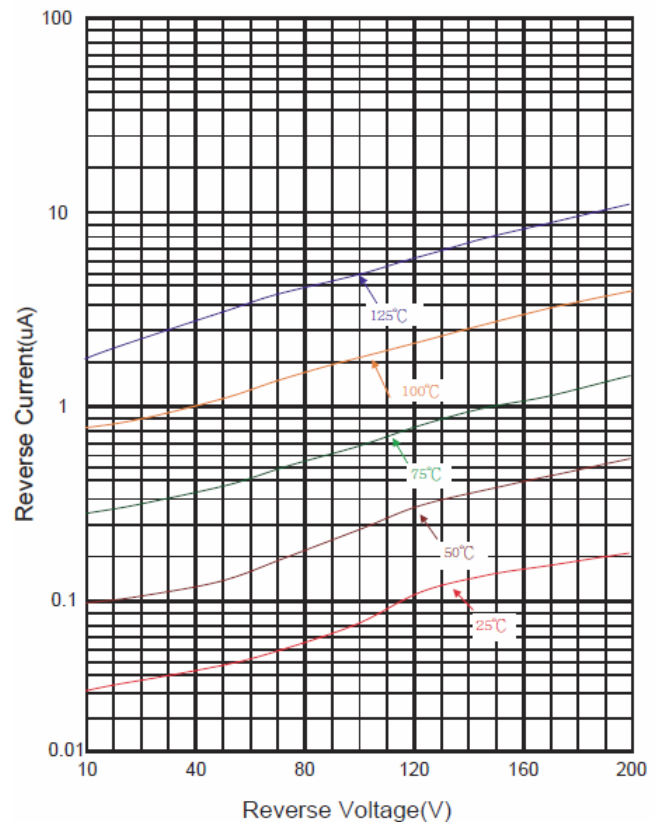

Typical Junction Capacitance

