


CRYSTAL CLOCK OSCILLATORS

Data Sheet 0413E

Rev. J



LVDS SD-B2D00 Series

Description


The **SD-B2D00 Series** of quartz crystal oscillators provide LVDS compatible signals in a ceramic SMD package. Systems designers may now specify space-saving, cost-effective packaged LVDS oscillators to meet their timing requirements.

Features

- Wide frequency range—80.0MHz to 312.5MHz
- User specified tolerance available
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 1000g
- 2.5 volt operation (other voltages available upon request)
- Metal lid electrically connected to ground to reduce EMI
- Enable/Disable
- LVDS output on pin 4, complement on Pin 5
- Low Jitter - Wavecrest jitter characterization available
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Overtone technology
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- High frequencies due to proprietary design
- Gold plated pads
- RoHS Compliant, Lead Free Construction

Electrical Connection

Pin	Connection
1	Enable/Disable
2	N.C.
3	Ground
4	Output
5	Output Complement
6	V _{CC}

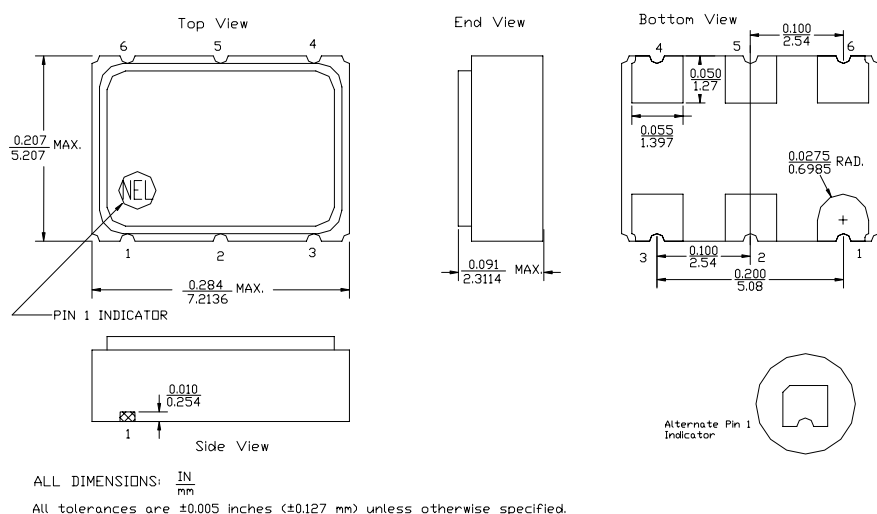

SD-B2D00 Series Continued
LVDS

Rev. J

Operating Conditions and Output Characteristics**Electrical Characteristics**

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	80.0MHz	-----	312.5MHz
Duty Cycle ⁽²⁾	-----	@ V _O /2	45/55%	-----	55/45%
Logic 0 ⁽²⁾	V _{OL}	-----	0.80V	-----	1.10V
Logic 1 ⁽²⁾	V _{OH}	-----	1.25V	-----	1.55V
Differential Voltage ⁽²⁾	V _{OD}	-----	250 mV	-----	450 mV
Disable Voltage	-----	V _{EE} =0V	-----	-----	0.8V
Enable Voltage ⁽⁵⁾	-----	V _{EE} =0V	2.0V	-----	-----
Rise & Fall Time ⁽²⁾	tr,tf	20-80%V _O	-----	0.8 ns	1.0 ns
Tpd ⁽⁴⁾	-----	-----	-0.5 ns	-----	+0.5 ns
Jitter, RMS ⁽³⁾	-----	-----	-----	-----	3 psec
Frequency Stability ⁽¹⁾	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	-----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V _{CC}	-----	2.375V	2.5V	2.625V
Supply Current	I _{CC}	-----	0.0 mA	-----	80 mA
Output current	I _O	Continuous Output Current	0.0 mA	-----	±50.0 mA
Operating temperature	T _A	-----	0°C	-----	70°C
Storage temperature	T _S	-----	-55°C	-----	125°C
Power Dissipation	P _D	-----	-----	-----	210 mW
Solder temperature	T _L	4 minutes	-----	-----	253°C
Load	100 ohms across differential outputs	-----	-----	-----	-----
Start-up time	t _s	-----	-----	2 ms	10 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Hermetic Seal	Leak rate less than 1 x 10 ⁻⁸ atm.cc/sec of helium

Footnotes:

- 1) Standard frequency stability (±20,±25,±50ppm & others available)
- 2) With Load of 100 ohms across differential outputs.
- 3) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.
RMS jitter bandwidth of 12kHz to 20Mhz.
- 4) Tpd is phase shift between the falling edge of pin 4 and the rising edge of pin 5.
- 5) Open to enable pin also enables the output

Creating a Part Number**SD - B2D0X - FREQ****Package Code**

SD 6 Pad 5x7 SMD

Tolerance/Performance

0 ±100ppm 0-70°C
 1 ±50ppm 0-70°C
 7 ±25ppm 0-70°C
 9 Customer Specific
 A ±20ppm 0-70°C
 B ±50ppm -40 to +85°C
 C ±100ppm -40 to +85°C

Input Voltage

Code Specification
 A 3.3V
 B 2.5V
 5V

**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com