




SPL (Hong Kong) Limited

Rm 2507, 25/F, Prosperity Centre, 25 Chong Yip St., Kwun Tong, Kln., HK.
Tel: 852-23426867 / 57 Fax: 852-23426847 Email: sales@spl-hk.com.hk
www.buzzer.com.hk ; www.transducer.com.hk ; www.connector.com.hk

Dynamic Receiver SD1038 series

DIMENSIONS

Date : 11 Jan., 2008

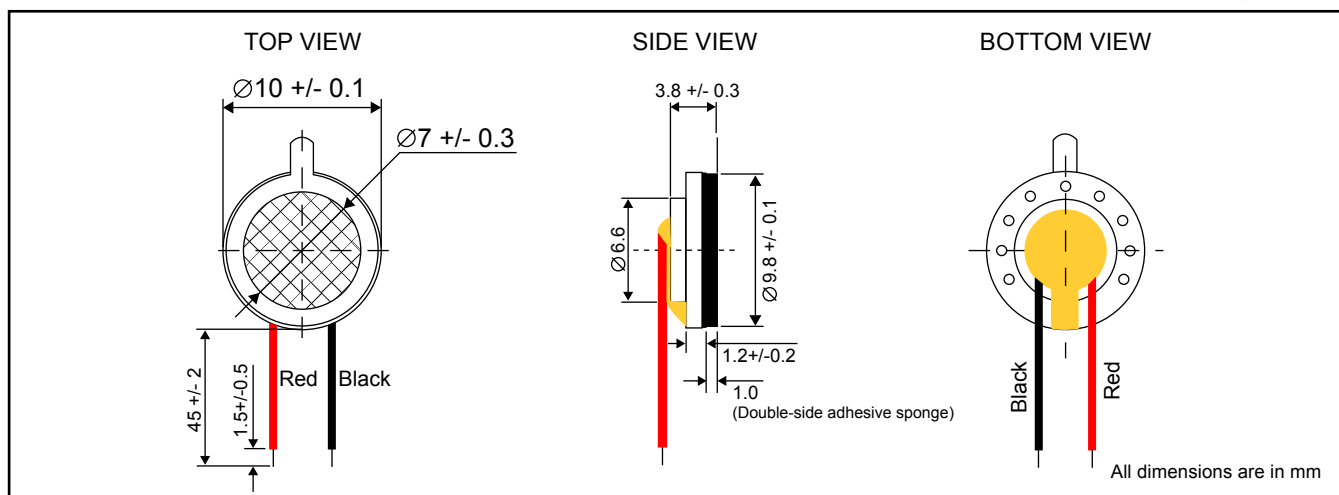

Ref. no. : PC197U-R

Remark : RoHS compliance

ELECTRICAL SPECIFICATIONS

Model No.	SD1038-008W045R
Sensitivity (Artificial Ear)	114 +/- 3 dB [at 0.1Vrms, 1K Hz]
Rated Input Power	30 mW
Max. Input Power	50 mW
Frequency Range	Fo ~ 5000 Hz
AC. Impedance At 1 KHz	8 Ohm +/- 15 %
HAC Competible	No
Operating Temperature	-30 ~ +60 °C
Storage Temperature	-25 ~ +65 °C
Terminal	Wire
Housing Material	Metal
Colour	Silver
Weight	0.3 g