

## SOD-323 Plastic-Encapsulate Schottky Barrier Diode

### FEATURES

- \* High Current Capability
- \* Low Forward Voltage Drop


### MECHANICAL DATA

- \* SOD-323 Small Outline Plastic Package
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

**Marking: SD103AWS: S4  
SD103BWS: S5  
SD103CWS: S6**



**SOD-323**

### Maximum Ratings & Thermal Characteristics (Ratings at 25 °C ambient temperature unless otherwise specified.)


Parameters	Symbol	SD103AWS	SD103BWS	SD103CWS	Unit
Maximum repetitive peak reverse voltage	VRRM	40	30	20	V
Maximum RMS voltage	VRMS	28	21	14	V
Maximum DC blocking voltage	VDC	40	30	20	V
Maximum average forward rectified current	IFM	350			mA
Peak forward surge current 8.3 ms single half sine-wave	IFSM	1.5			A
Power Dissipation	PD	200			mW
Typical thermal resistance	RθJA	500			°C/W
Operating junction temperature	Tj	125			°C
Storage temperature range	TSTG	-50			°C

### Electrical Characteristics (Ratings at 25 °C ambient temperature unless otherwise specified.)


Parameters	Symbol	Test conditions	SD103AWS	SD103BWS	SD103CWS	Unit
Maximum forward voltage	VF	IF = 20mA IF = 200mA	0.370 0.600			V
Maximum reverse breakdown voltage	VR	IR=100uA	40	30	20	V
Maximum reverse current	IR	VR=30V SD103AWS VR=20V SD103BWS VR=10V SD103CWS	5.0			uA
Type junction capacitance	Cj	VR =0V, f = 1MHz	50			pF
Reverse recovery time	Trr	IF=IR=200mA, Irr=0.1xIR,RL=100 Ω	10			ns

## RATING AND CHARACTERISTICS CURVES (SD103AWS THRU SD103CWS)


Forward Characteristics

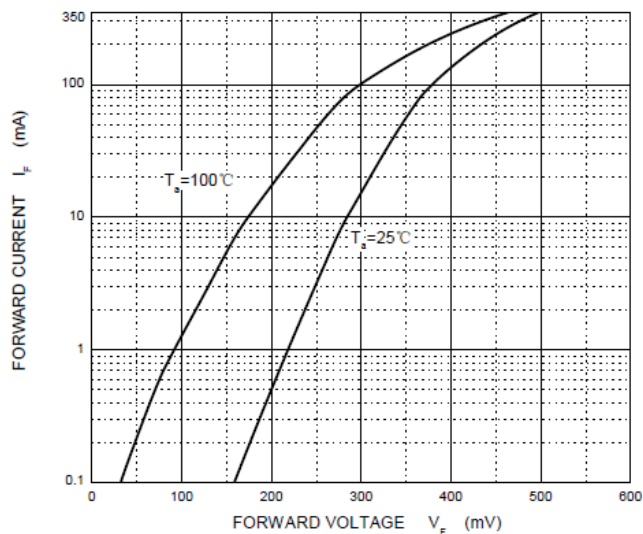


Reverse Characteristics

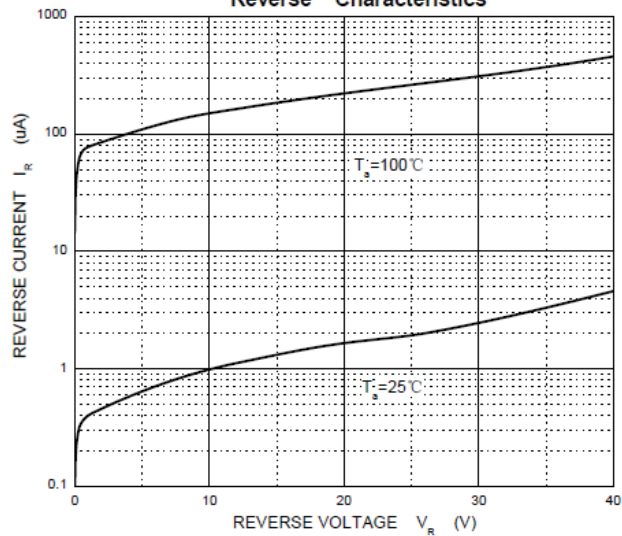

Capacitance Characteristics

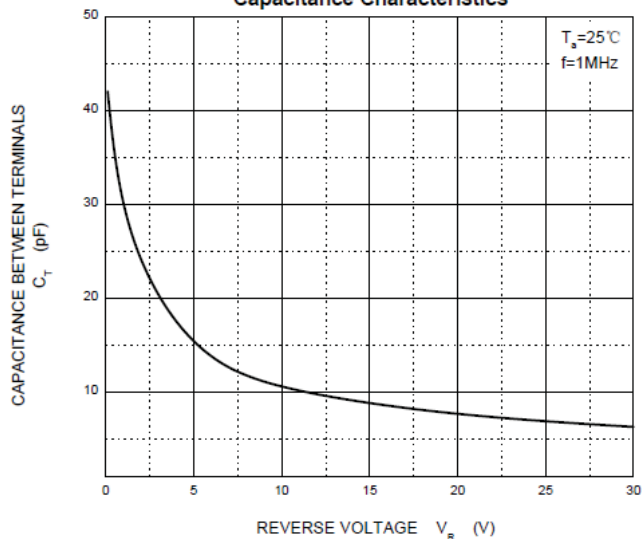


Power Derating Curve

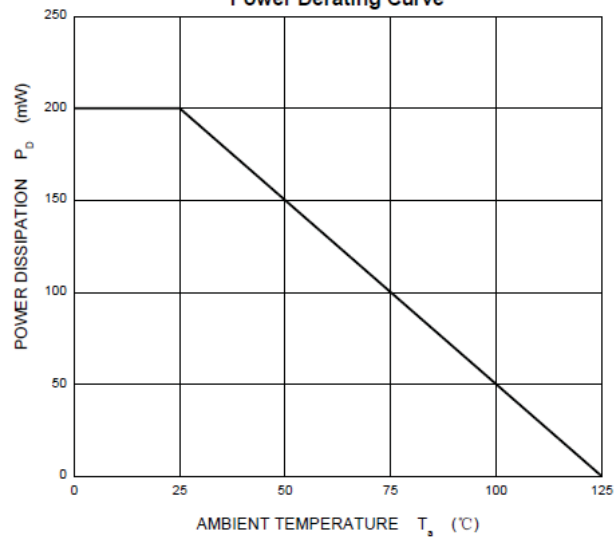

SOD-323 PACKAGE OUTLINE

Plastic surface mounted package

SOD-323

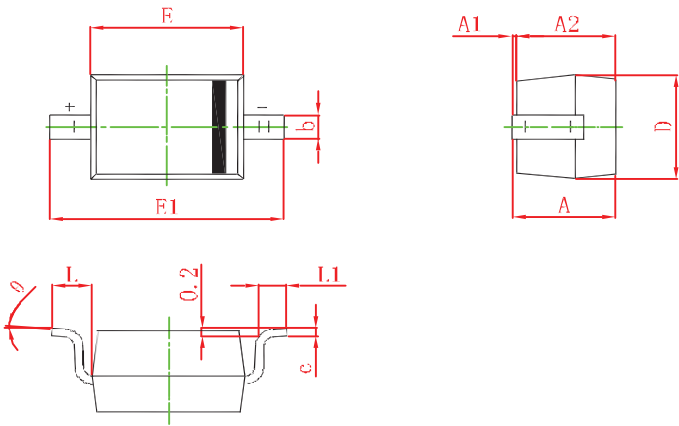

Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
$\theta$	0°	8°

## PACKAGING OF DIODE AND BRIDGE RECTIFIERS

### REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SOD-323	-T	3,000	15,000	---	---	178	390*205*31	120,000	5.17

## DISCLAIMER NOTICE

Rectron Inc. reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc. does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.