



注：外形尺寸由客户提供

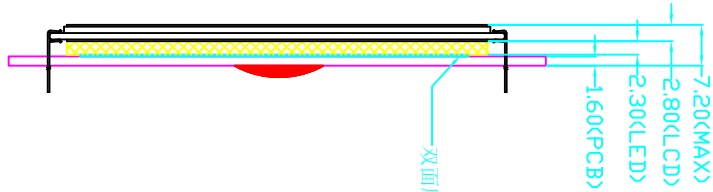

左右旋转180度背面视图, 接口定义

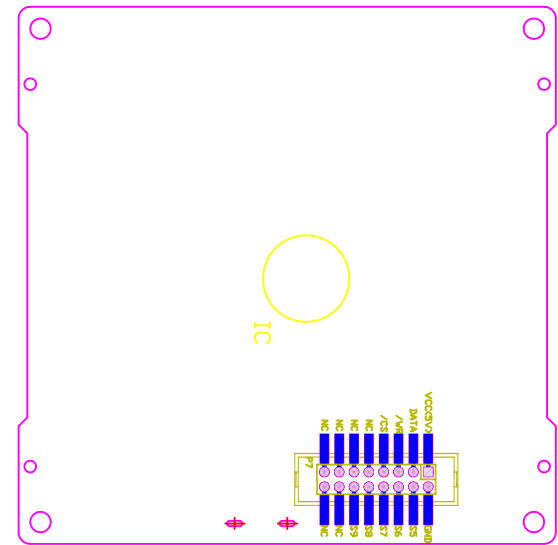

1	VCC
2	GND
3	DATA
4	S5
5	/W/R
6	S6
7	/CS
8	S7
9	NC
10	S8
11	NC
12	S9
13	NC
14	NC
15	NC
16	NC

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 DRIVE CONDITION : 1/8 DUTY, 1/4 BIAS, VLCD=4.5V, VDD=5.0V
 DISPLAY MODE : FSTN POSITIVE TRANSMISSIVE MODE
 Backlight: White 6 PCS, 90MA ,3.0V
 Driver IC: HT1623

DESCRIPTION: C/D 结构图

SCALE: FTT	UNIT
SHEET: 1 OF 2	
GENERAL TOL: ±0.20mm	DATE
APPROVALS	
APP:	
CHK:	
DWVN: DAP	20101012
MODEL NUMBER: SD1084	
DO NOT SCALE THIS DRAWING.	
PART NO:	

南京盛鑫电子有限公司
Nanjing ShengXin LCD Technology CO., Ltd

