General Purpose Schottky Barrier Diode

General Description

These Schottky barrier diodes are designed for high-speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conductions. Miniature surface mount package is excellent for hand-held and portable applications where space is limited.



SOT-23F

Features and Benefits

- Low forward drop voltage and low leakage current
- Very low switching time
- Full lead (Pb)-free device and RoHS compliant device
- Available in “Green” device

Applications

- General purpose and high speed switching
- Protection circuit and voltage clamping

Ordering Information

Part Number	Marking Code	Package	Packaging
SDB310WAF	DB2 □	SOT-23F	Tape & Reel

Marking Information



DB2 = Specific Device Code

□ = Year & Week Code Marking

Pinning Information

Pin	Description	Simplified Outline	Graphic Symbol
1	Cathode (Diode 1)		
2	Cathode (Diode 2)		
3	Common Anode		

Absolute Maximum Ratings (T_{amb}=25℃, Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Peak reverse voltage	V_{RM}	40	V
DC reverse voltage	V_R	30	V
Repetitive peak forward current	I_{FRM}	0.5	A
Forward current	I_F	0.2	A
Non-repetitive peak forward surge current(t=10ms)	I_{FSM}	2	A
Power dissipation [1)]	P_D	150	mW

[1)] Device mounted on FR-4 board with recommended pad layout.

Thermal Characteristics (T_{amb}=25℃, Unless otherwise specified)

Characteristic	Symbol	Ratings	Unit
Thermal resistance, junction to ambient [1)]	$R_{th(j-a)}$	833	°C/W
Operating junction temperature	T_j	150	°C
Storage temperature range	T_{stg}	-55 ~ 150	°C

[1)] Device mounted on FR-4 board with recommended pad layout.

Electrical Characteristics (T_{amb}=25℃, Unless otherwise specified)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage [2)]	$V_{F(1)}$	I_F=10mA	-	-	0.4	V
	$V_{F(2)}$	I_F=30mA	-	-	0.5	V
Reverse leakage current [3)]	I_R	V_R=30V	-	-	1	μA
Total capacitance	C_T	V_R=1V, f=1MHz	-	-	10	pF
Reverse recovery time	t_{rr}	I_F= I_R=10mA, $I_{R(REC)}$= 1mA	-	-	5	ns

[2)] Pulse test: $t_p \leq 380\mu s$, Duty cycle≤2%

[3)] Pulse test: $t_p \leq 5ms$, Duty cycle≤2%

Rating and Characteristic Curves

Fig. 1) Typical Forward Characteristics

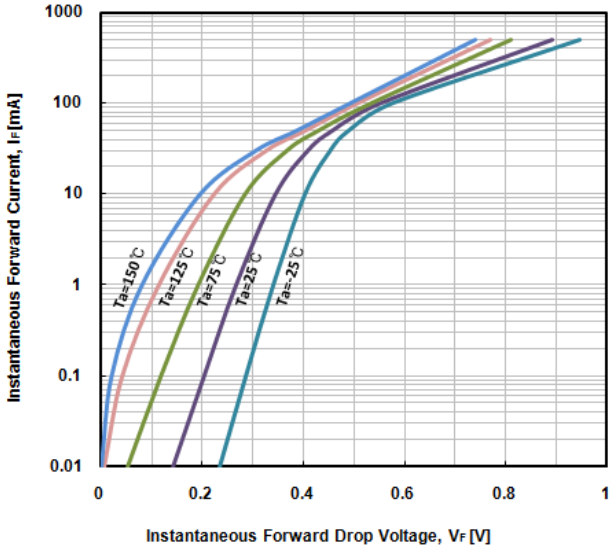

Fig. 2) Typical Reverse Characteristics

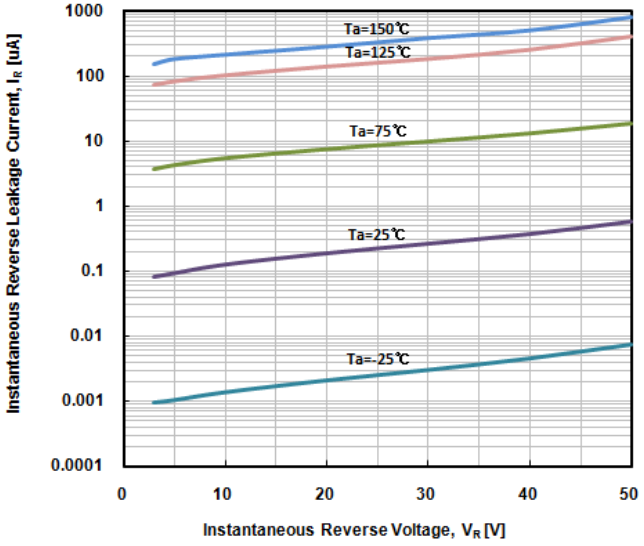

Fig. 3) Typical Total Capacitance Characteristics

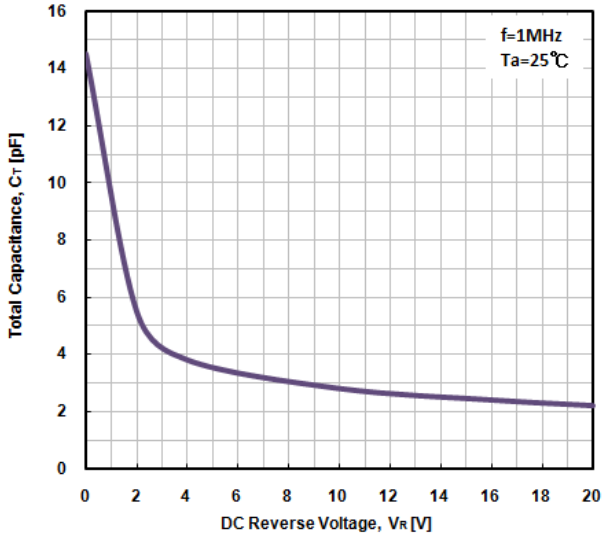

Fig. 4) Power dissipation vs. Ambient temperature

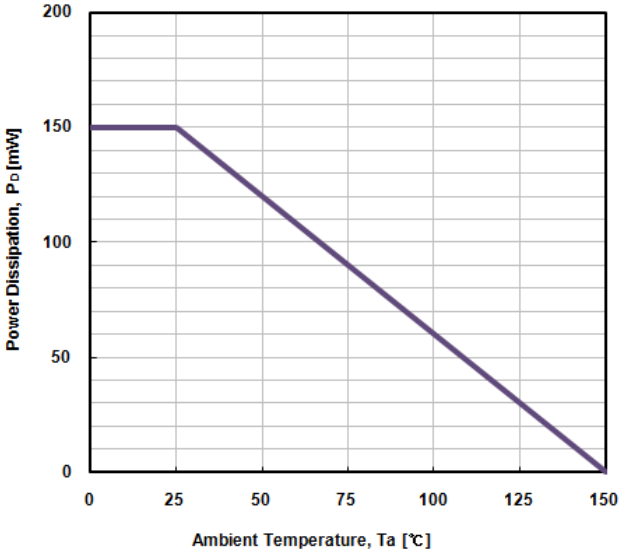

Fig. 5) Reverse recovery time equivalent test circuit

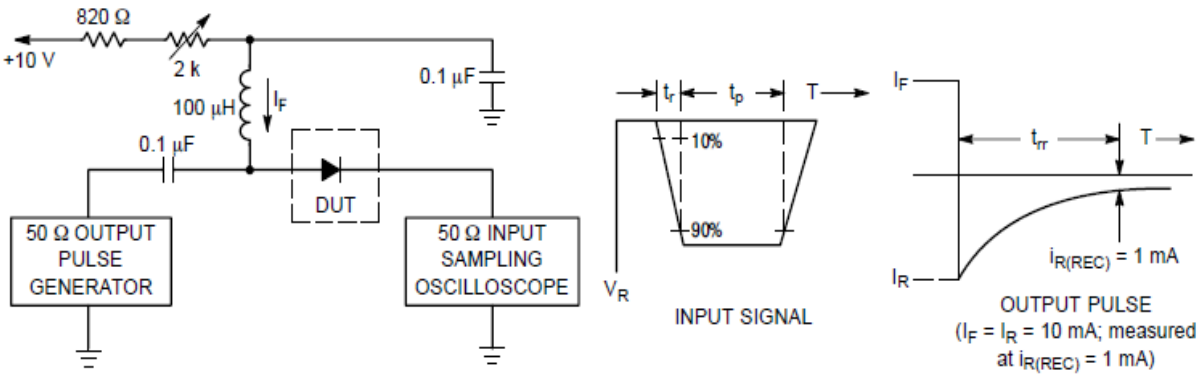

Package Outline Dimensions

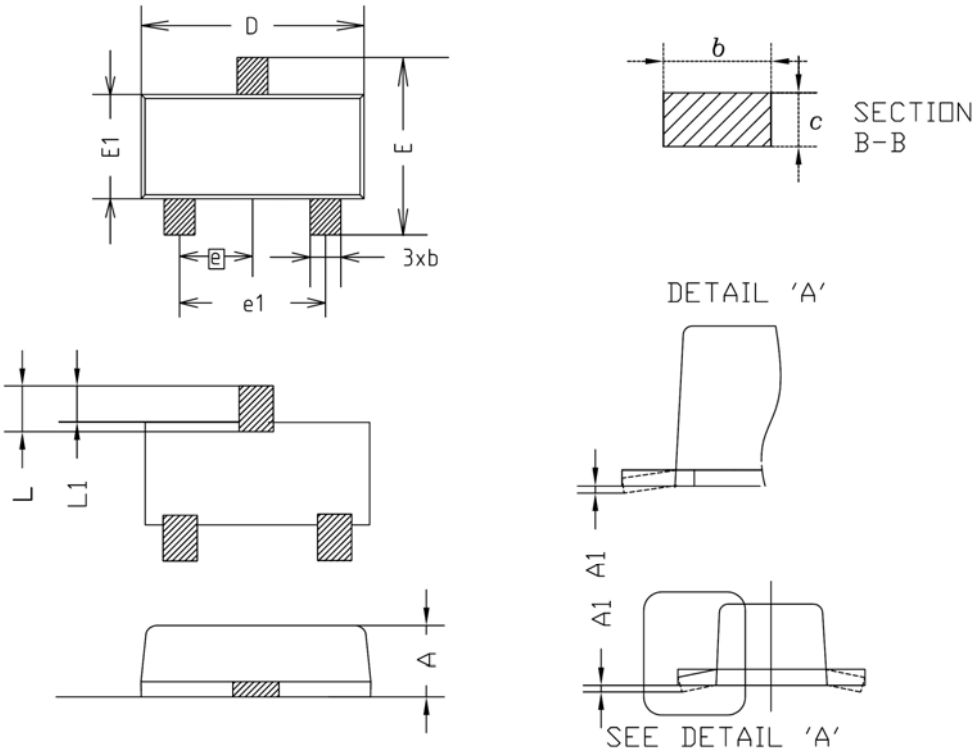

SYMBOL	MILLIMETER(mm)			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	0.80	0.90	1.00	
A1	0.00	–	0.10	
b	0.35	0.40	0.45	
c	0.10	0.15	0.20	
D	2.80	2.90	3.00	
E	2.30	2.40	2.50	
E1	1.50	1.60	1.70	
e	0.95BSC			
e1	1.80	1.90	2.00	
L	0.48	0.58	0.68	
L1	0.30	–	0.50	

※ Recommend PCB solder land (Unit : mm)

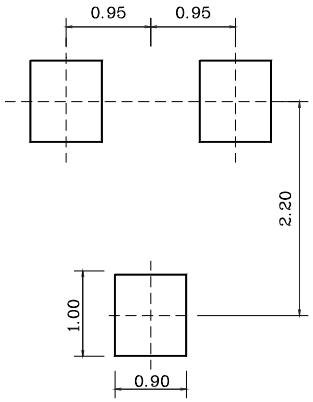

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.