

Power Switch 5A 250V AC Qualified Primary Input Voltage Selection Type SDKP Series



Primary voltage changeover switch replacing the SDKG.


- Detector
- Push
- Slide
- Rotary
- Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

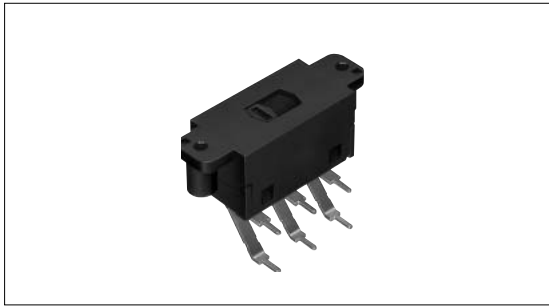

Ratings and Safety Standards

Items	Specifications
UL CSA	5A 250V AC
SEMKO	5A 250V ~
Ratings satisfying local electrical appliance and material safety law	250V 5A≠

Product Line


Circuit arrangement	Travel (mm)	Operating force	Mounting method	Terminal configuration	Turn stopper	Marking variety	Minimum order unit (pcs.)	Product No.	Drawing No.
DPDT	6	10 ⁺¹⁰ / ₋₅ N	Self-tap (for M2.6)	Right angle	Without	Without marking	1,000	SDKPA40100	1
					With			SDKPA40200	2
			Self-tap (for M3)		Without			SDKPA40300	1
					With			SDKPA40400	2

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
1		
2		






**Circuit Diagram
(Viewed from Direction A)**



Note

Please place purchase orders per minimum order unit(integer).

List of Varieties

Items	Type	Slide				Rotary	
	Series	SDKG	SDKH	SDKP	SDKT	SDKZ	
Detector	Photo						
Push							
Slide	Travel (mm)	6			2.2	Full rotation	
Rotary	Remark					With signal circuit	
Encoders	Operating temperature range	-10 to +60				-10 to +70	
Power	Rating	5A 250V AC			6A 125V AC	PS:16(6)A 250V AC, 14(6)A 250V AC DC:0.1A 12V DC	
Dual-in-line Package Type	Electrical performance	Contact resistance	50m max.		100m max.	10m max.	
TACT Switch™			100m max.		10m max.	100m max. 1 max.	
Custom-Products		Insulation resistance	500M min. 500V DC	100M min. 500V DC	500M min. 500V DC	1,000M min. 500V DC	500M min. 500V DC 100M min. 100V DC
	Voltage proof	2,000V AC for 1minute			1,000V AC for 1minute	2,000V AC for 1minute 100V AC for 1minute	
	Mechanical performance	Terminal strength	10N for 1minute				20N 5N
Push Type		Actuator strength	Operating direction		50N	30N	—
Rocker Type			Perpendicular direction		—	10N	30N
Slide Type		Resistance to soldering heat	Manual soldering		350 ± 10 , 3 ± 0.5s		350 ± 10 , 3 ± 0.5s
Rotary Type	Dip soldering		260 ± 5 , 10 ± 1s				
	Durability	Operating life	100cycles		20,000cycles	10,000cycles 30,000cycles	
			Without load		Load : As ratings		
	Environmental performance	Cold	-20 ± 2 for 96h			-40 ± 2 for 240h	
		Dry heat	85 ± 2 for 96h			85 ± 2 for 240h	
		Damp heat	40 ± 2 , 90 to 95%RH for 96h			40 ± 2 , 90 to 95%RH for 240h	
	Page	227	229	230	231	232	