

SEMiX453GB17E4s



SEMiX® 3s

SEMiX453GB17E4s

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to $T_C=125^{\circ}\text{C}$ max.
- Product reliability results are valid for $T_J=150^{\circ}\text{C}$
- Dynamic values apply to the following combination of resistors:
 $R_{Gon,main} = 2,4 \Omega$
 $R_{Goff,main} = 2,4 \Omega$
 $R_{G,X} = 2,2 \Omega$
 $R_{E,X} = 0,5 \Omega$

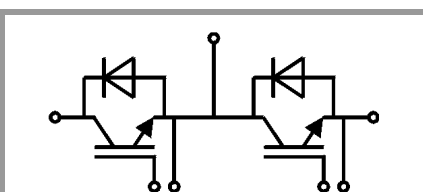

GB

Absolute Maximum Ratings

Symbol	Conditions	Values	Unit
IGBT			
V_{CES}	$T_J = 25^{\circ}\text{C}$	1700	V
I_C	$T_J = 175^{\circ}\text{C}$	$T_C = 25^{\circ}\text{C}$	762
		$T_C = 80^{\circ}\text{C}$	579
I_{Cnom}		450	A
I_{CRM}	$I_{CRM} = 3 \times I_{Cnom}$	1350	A
V_{GES}		-20 ... 20	V
t_{psc}	$V_{CC} = 1000 \text{ V}$ $V_{GE} \leq 15 \text{ V}$ $V_{CES} \leq 1700 \text{ V}$	$T_J = 150^{\circ}\text{C}$	10
T_J		-40 ... 175	$^{\circ}\text{C}$
Inverse diode			
V_{RRM}	$T_J = 25^{\circ}\text{C}$	1700	V
I_F	$T_J = 175^{\circ}\text{C}$	$T_C = 25^{\circ}\text{C}$	482
		$T_C = 80^{\circ}\text{C}$	354
I_{Fnom}		450	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	900	A
I_{FSM}	$t_p = 10 \text{ ms, sin } 180^{\circ}, T_J = 25^{\circ}\text{C}$	2565	A
T_J		-40 ... 175	$^{\circ}\text{C}$
Module			
$I_{t(RMS)}$		600	A
T_{stg}		-40 ... 125	$^{\circ}\text{C}$
V_{isol}	AC sinus 50Hz, $t = 1 \text{ min}$	4000	V

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 450 \text{ A}$ $V_{GE} = 15 \text{ V}$ chiplevel		$T_J = 25^{\circ}\text{C}$	1.90	2.20
			$T_J = 150^{\circ}\text{C}$	2.26	2.45
V_{CE0}	chiplevel		$T_J = 25^{\circ}\text{C}$	1.1	1.2
			$T_J = 150^{\circ}\text{C}$	1	1.1
r_{CE}	$V_{GE} = 15 \text{ V}$ chiplevel		$T_J = 25^{\circ}\text{C}$	1.8	2.2
			$T_J = 150^{\circ}\text{C}$	2.8	3
$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C = 18 \text{ mA}$	5.2	5.8	6.4	V
I_{CES}	$V_{GE} = 0 \text{ V}$ $V_{CE} = 1700 \text{ V}$		$T_J = 25^{\circ}\text{C}$		5
					mA
C_{ies}	$V_{CE} = 25 \text{ V}$ $V_{GE} = 0 \text{ V}$		$f = 1 \text{ MHz}$	36	nF
C_{oes}			$f = 1 \text{ MHz}$	1.50	nF
C_{res}			$f = 1 \text{ MHz}$	1.14	nF
Q_G	$V_{GE} = -8 \text{ V} \dots +15 \text{ V}$		3600		nC
R_{Gint}	$T_J = 25^{\circ}\text{C}$		1.67		Ω
$t_{d(on)}$	$V_{CC} = 1200 \text{ V}$ $I_C = 450 \text{ A}$		$T_J = 150^{\circ}\text{C}$	455	ns
t_r	$V_{GE} = +15/-15 \text{ V}$		$T_J = 150^{\circ}\text{C}$	65	ns
E_{on}	$R_{Gon} = 3.3 \Omega$		$T_J = 150^{\circ}\text{C}$	250	mJ
$t_{d(off)}$	$R_{Goff} = 3.3 \Omega$		$T_J = 150^{\circ}\text{C}$	960	ns
t_f	$di/dt_{on} = 7000 \text{ A}/\mu\text{s}$ $di/dt_{off} = 2220 \text{ A}/\mu\text{s}$		$T_J = 150^{\circ}\text{C}$	170	ns
E_{off}	$du/dt = 5160 \text{ V}/\mu\text{s}$ $L_s = 30 \text{ nH}$		$T_J = 150^{\circ}\text{C}$	190	mJ

SEMiX453GB17E4s



SEMiX® 3s

SEMiX453GB17E4s

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks


- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_J=150^\circ\text{C}$
- Dynamic values apply to the following combination of resistors:
 $R_{Gon,main} = 2,4 \Omega$
 $R_{Goff,main} = 2,4 \Omega$
 $R_{G,X} = 2,2 \Omega$
 $R_{E,X} = 0,5 \Omega$

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
$t_{d(on)}$	$V_{CC} = 900 \text{ V}$ $T_J = 150^\circ\text{C}$		490		ns
t_r	$I_C = 450 \text{ A}$ $T_J = 150^\circ\text{C}$		120		ns
E_{on}	$V_{GE} = +15/-15 \text{ V}$ $R_{G on} = 3.3 \Omega$ $T_J = 150^\circ\text{C}$		118		mJ
$t_{d(off)}$	$R_{G off} = 3.3 \Omega$ $T_J = 150^\circ\text{C}$		900		ns
t_f	$di/dt_{on} = 4000 \text{ A}/\mu\text{s}$ $T_J = 150^\circ\text{C}$		200		ns
E_{off}	$di/dt_{off} = 2050 \text{ A}/\mu\text{s}$ $du/dt = 4600 \text{ V}/\mu\text{s}$ $L_s = 80 \text{ nH}$ $T_J = 150^\circ\text{C}$		154		mJ
$R_{th(j-c)}$	per IGBT			0.056	K/W

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
Inverse diode					
$V_F = V_{EC}$	$I_F = 450 \text{ A}$ $V_{GE} = 0 \text{ V}$ chiplevel $T_J = 25^\circ\text{C}$		1.98	2.37	V
	$T_J = 150^\circ\text{C}$		2.11	2.52	V
V_{F0}	chiplevel $T_J = 25^\circ\text{C}$	1.16	1.32	1.56	V
	$T_J = 150^\circ\text{C}$		1.08	1.22	V
r_F	chiplevel $T_J = 25^\circ\text{C}$	1.2	1.5	1.8	m Ω
	$T_J = 150^\circ\text{C}$		2.3	2.9	m Ω
I_{RRM}	$I_F = 450 \text{ A}$ $di/dt_{off} = 6240 \text{ A}/\mu\text{s}$ $T_J = 150^\circ\text{C}$		440		A
Q_{rr}	$V_{GE} = -15 \text{ V}$ $T_J = 150^\circ\text{C}$		150		μC
E_{rr}	$V_R = 1200 \text{ V}$ $T_J = 150^\circ\text{C}$		100		mJ
I_{RRM}	$I_F = 450 \text{ A}$ $di/dt_{off} = 3700 \text{ A}/\mu\text{s}$ $T_J = 150^\circ\text{C}$		400		A
Q_{rr}	$V_{GE} = -15 \text{ V}$ $T_J = 150^\circ\text{C}$		150		μC
E_{rr}	$V_R = 900 \text{ V}$ $T_J = 150^\circ\text{C}$		87		mJ
$R_{th(j-c)}$	per diode			0.125	K/W
Module					
L_{CE}			20		nH
$R_{CC'+EE'}$	res. terminal-chip $T_C = 25^\circ\text{C}$		0.85		m Ω
	$T_C = 150^\circ\text{C}$		1.2		m Ω
$R_{th(c-s)}$	per module		0.04		K/W
M_s	to heat sink (M5)	3		5	Nm
M_t	to terminals (M6)	2.5		5	Nm
					Nm
w				300	g
Temperature Sensor					
R_{100}	$T_C=100^\circ\text{C}$ ($R_{25}=5 \text{ k}\Omega$)		$493 \pm 5\%$		Ω
$B_{100/125}$	$R(T)=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; $T[K]$;		$3550 \pm 2\%$		K



GB

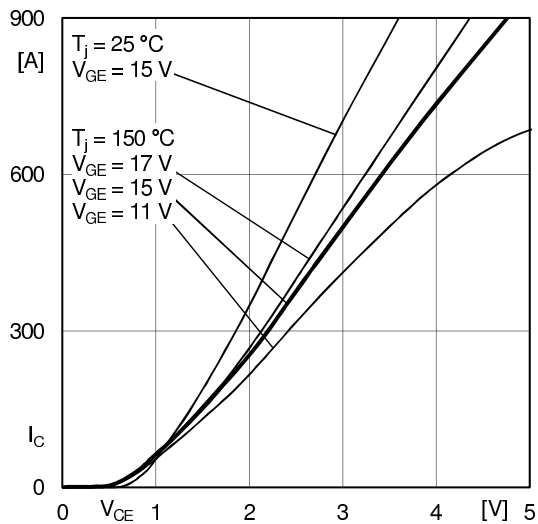


Fig. 1: Typ. output characteristic, inclusive $R_{CC'} + EE'$

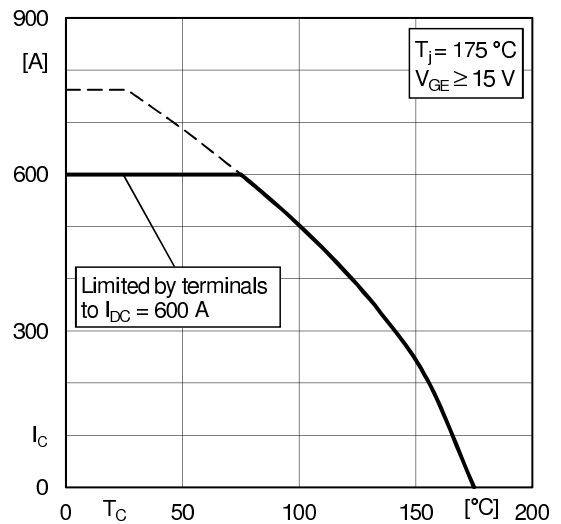


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

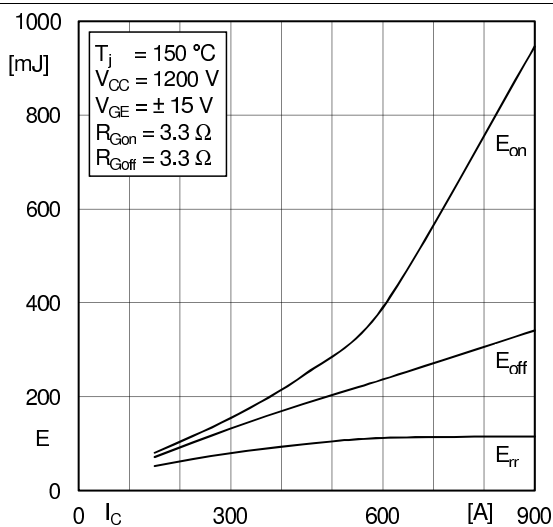


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

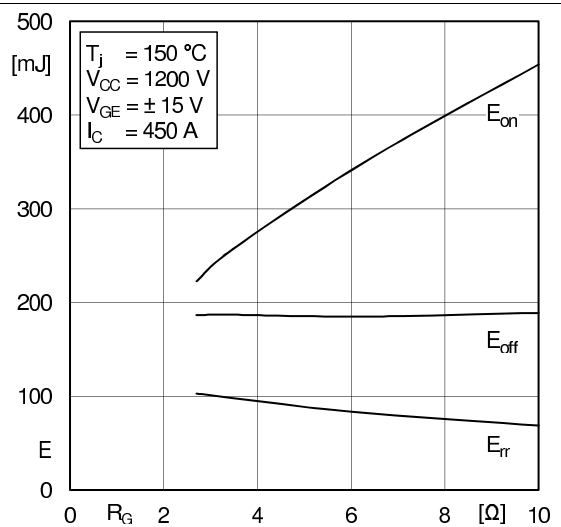


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

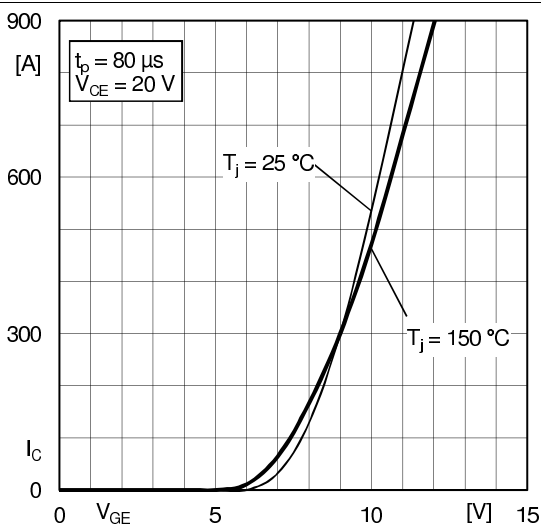


Fig. 5: Typ. transfer characteristic

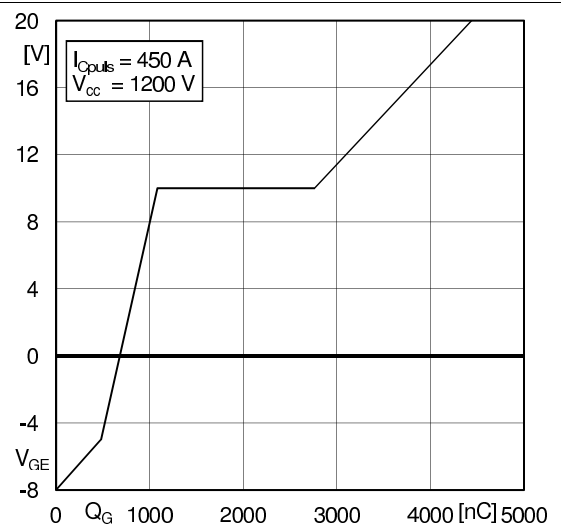


Fig. 6: Typ. gate charge characteristic

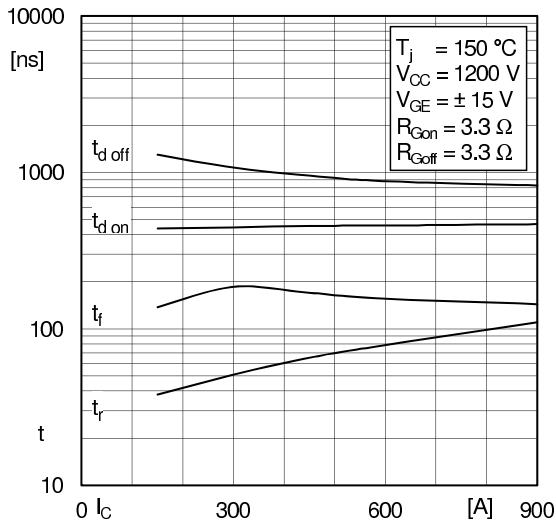


Fig. 7: Typ. switching times vs. I_C

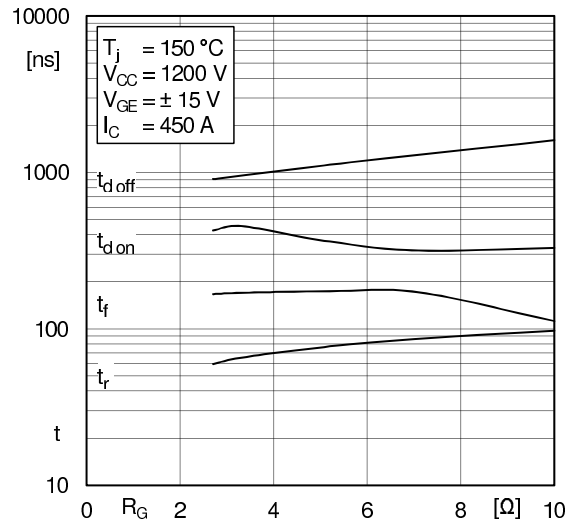


Fig. 8: Typ. switching times vs. gate resistor R_G

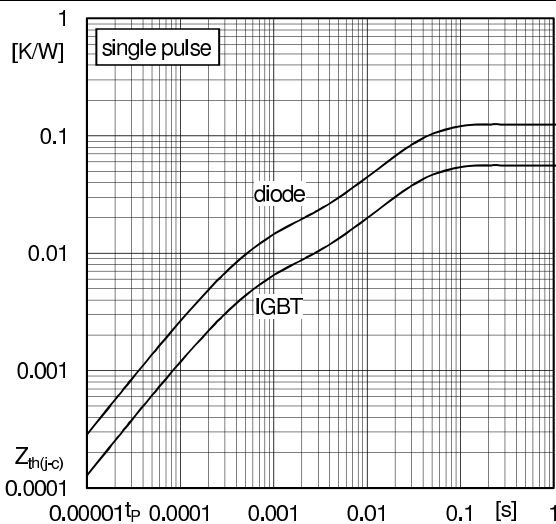


Fig. 9: Typ. transient thermal impedance

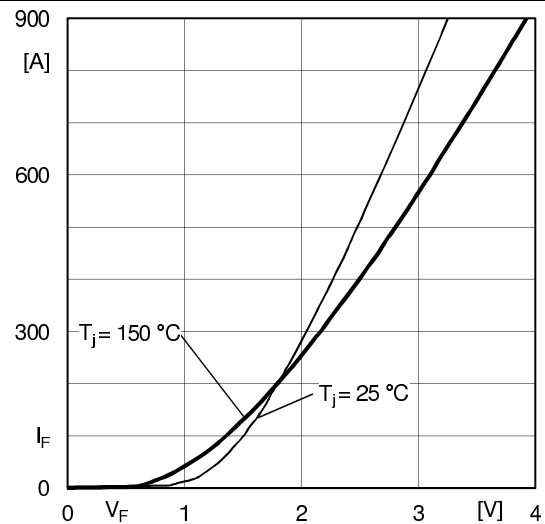


Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'} + EE'$

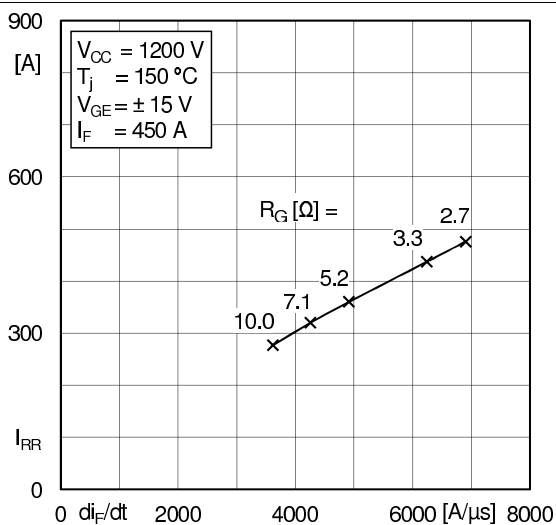


Fig. 11: Typ. CAL diode peak reverse recovery current


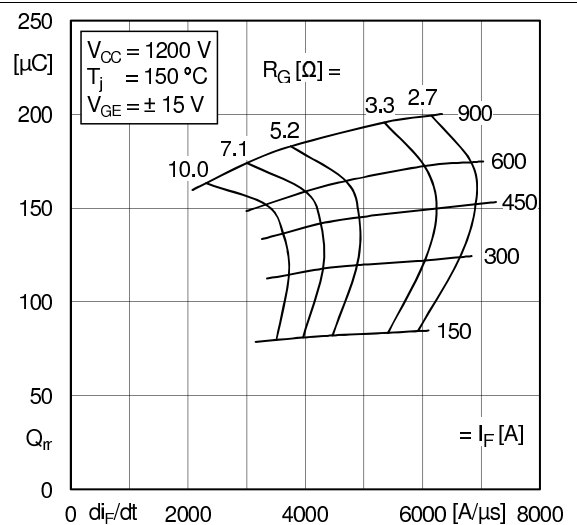



Fig. 12: Typ. CAL diode recovery charge

Case: SEMiX 3s

guide pin left
F-F (1 : 1)





screw duct
(1x centre):
H-H (1 : 1)





	0,3	connector 1-2 / 3-4
	0,2	each connector A

general tolerance:
ISO 2768-m
ISO 8015

screw duct (6x)
spring duct (16x):
G-G (1 : 1)

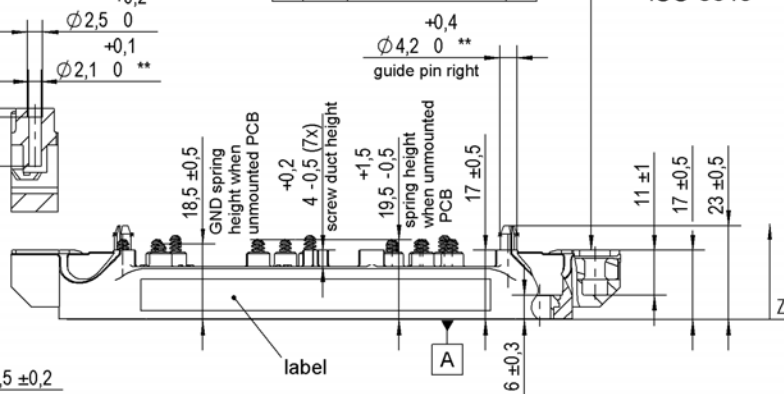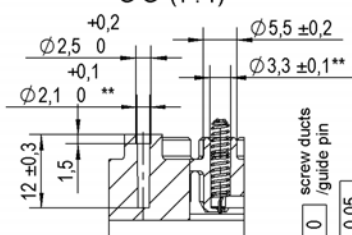

All measures in Z-direction
valid when mounted to heat sink

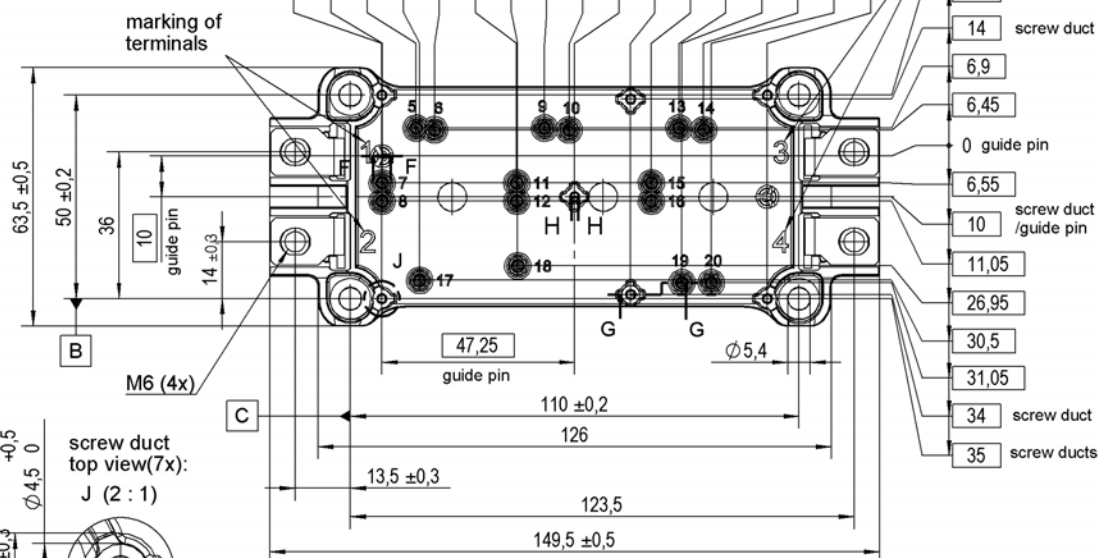

*guide pin left with

	Ø 0,25	A	B	C
--	--------	---	---	---


**screw ducts / spring ducts / guide pin right with

	Ø 0,5	A	B	D
--	-------	---	---	---

Rules for the contact PCB:

- holes guidepins = $\varnothing 4 \pm 0,1$ / position tolerance $\pm 0,1$
- holes for screws = $\varnothing 3,3 \pm 0,1$ / position tolerance $\pm 0,1$
- spring contact pad = $\varnothing 3,6 \pm 0,1$ / position tolerance $\pm 0,1$

SEMiX 3s

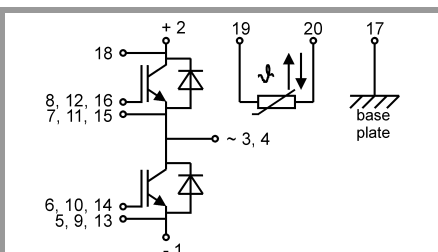

spring configuration

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.