

SF1001 Series

140 MHz 750 kHz SAW Filter



- **Specifications**



	Unit	Min.	Typical	Max
Center Frequency, Fc	MHz		140	
Insertion Loss with matching circuit	dB		8.5	10.5
3 dB Bandwidth	KHz	7.50	800	
40 dB Bandwidth	MHz		2.04	2.25
Group Delay Ripple				
Fc ± 300 kHz	nsec		300	500
Passband Ripple				
Fc ± 300 kHz	P-P dB		0.8	1.2
Operating Temperature	°C	-32	25	+71
Package	mm ³	7.0 x 5.0 x 1.6		

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

SF1001 Series

- Simulation Plot (sf140_008_r.s.2p,sf140_008_m.s2p)

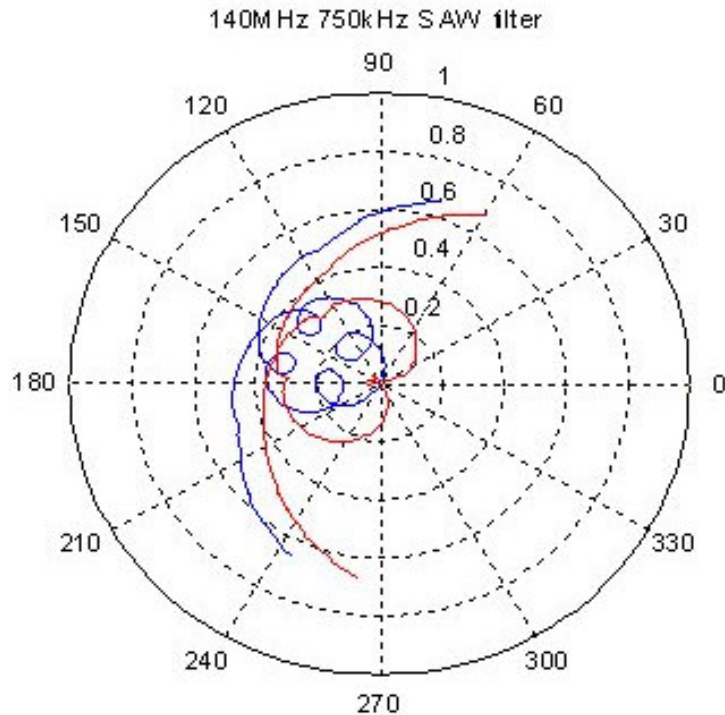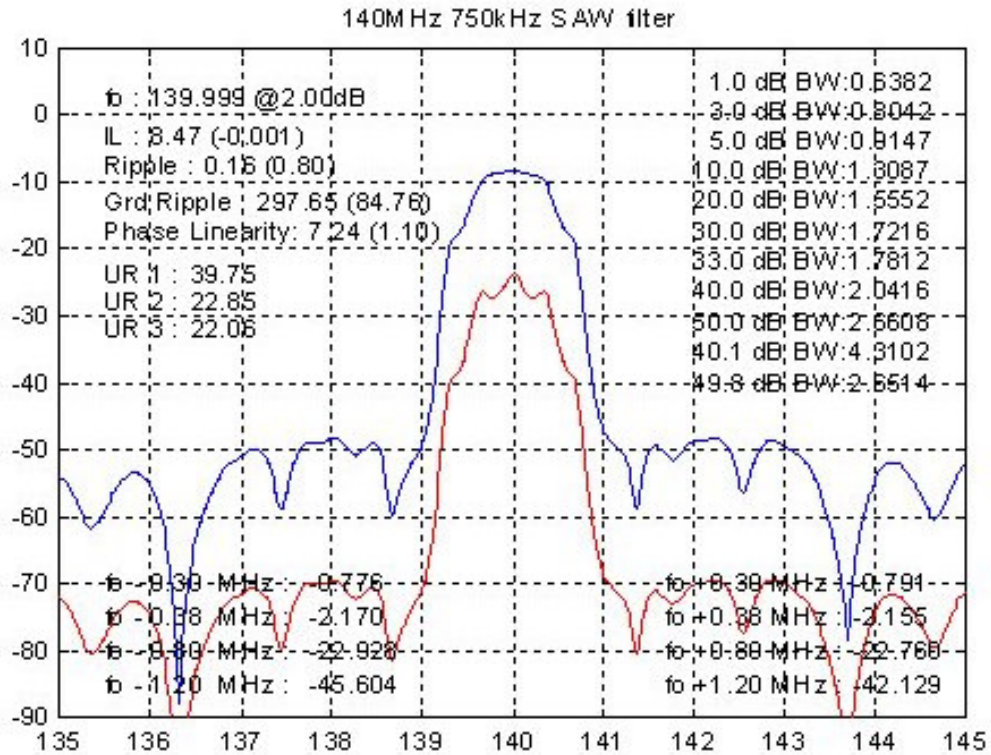

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.