

SUPER FAST RECTIFIER


SF1020BC-SF1060BC

FEATURES

- Low cost.
- Diffused Junction.
- Low forward voltage drop.
- High current capability.
- Easily cleaned with Alcohol, Isopropanol and similar solvents.
- The Plastic Material Carries U/L Recognition 94V-0.



Lead-free

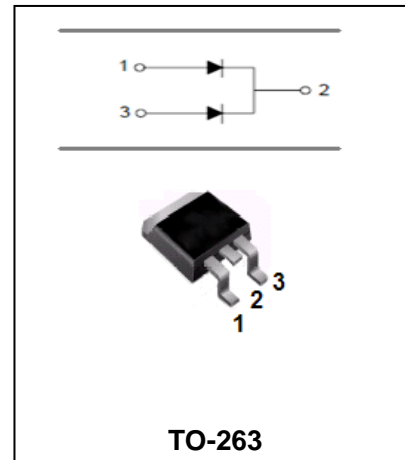

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	SF 1020 BC	SF 1030 BC	SF 1040 BC	SF 1050 BC	SF 1060 BC	Units
V_{RRM}	Recurrent Peak Reverse Voltage	200	300	400	500	600	V
V_{RMS}	RMS Voltage	140	210	280	350	420	V
V_{DC}	DC Blocking Voltage	200	300	400	500	600	V
$I_{F(AV)}$	Average Forward Rectified Current @ $T_A=100^\circ\text{C}$	10					A
I_{FSM}	Peak Forward Surge Current 8.3ms Single Half-Sine-wave Superimposed On Rated Load (Note1)	60					A
$R_{\theta JA}$	Typical Thermal Resistance (Note2)	3.0					$^\circ\text{C}/\text{W}$
C_J	Typical Junction Capacitance (Note3)	70	50				pF
$T_j T_{stg}$	Operating junction and Storage temperature Range	-55 to +150					$^\circ\text{C}$

Note: 1. The Value Just show Single Die.

2. Thermal Resistance From Junction to Ambient.

3. Measured at 1MHz and Applied Reverse Voltage of 4.0V DC.



SUPER FAST RECTIFIER



SF1020BC-SF1060BC

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MAX			UNIT
			SF1020BC	SF1030BC-SF1040BC	SF1050BC-SF1060BC	
Instantaneous Forward Voltage	V_F	$I_F=5A$	0.98	1.3	1.7	V
Reverse Current	I_R	$V_R=V_{RRM}, T_A=25^\circ C$ $V_R=V_{RRM}, T_A=100^\circ C$	5.0 250	10 400		μA
Reverse Recovery Time	t_{rr}	$I_F=0.5A, I_R=1A,$ $I_{rr}=0.25A$	35			ns

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


FIG.1 -- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

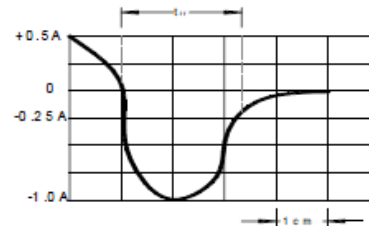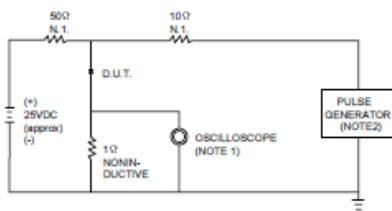

NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE = 1MΩ .22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω .


SET TIME BASE FOR 10 ns/cm

FIG.2 -- TYPICAL FORWARD CHARACTERISTIC

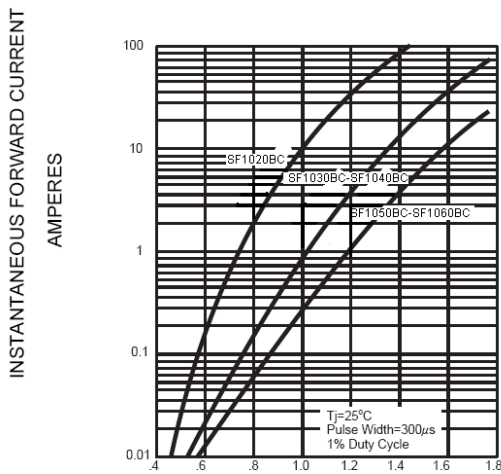

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.3 -- FORWARD DERATING CURVE

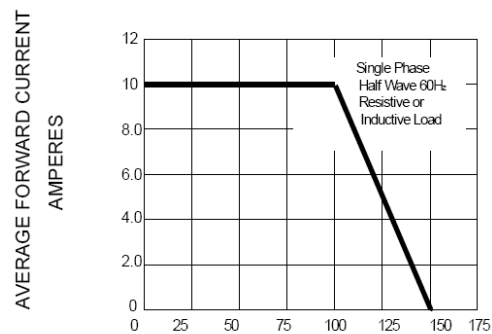

CASE TEMPERATURE, °C

SUPER FAST RECTIFIER

SF1020BC-SF1060BC

FIG.4 -- TYPICAL JUNCTION CAPACITANCE


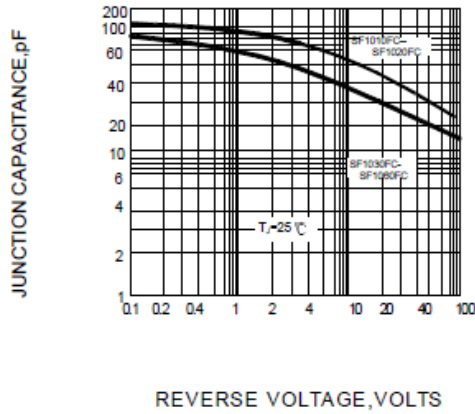



FIG.5 -- PEAK FORWARD SURGE CURRENT

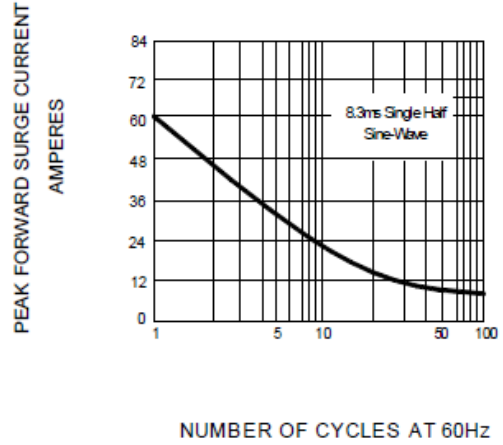

PACKAGE OUTLINE

Plastic surface mounted package

TO-263

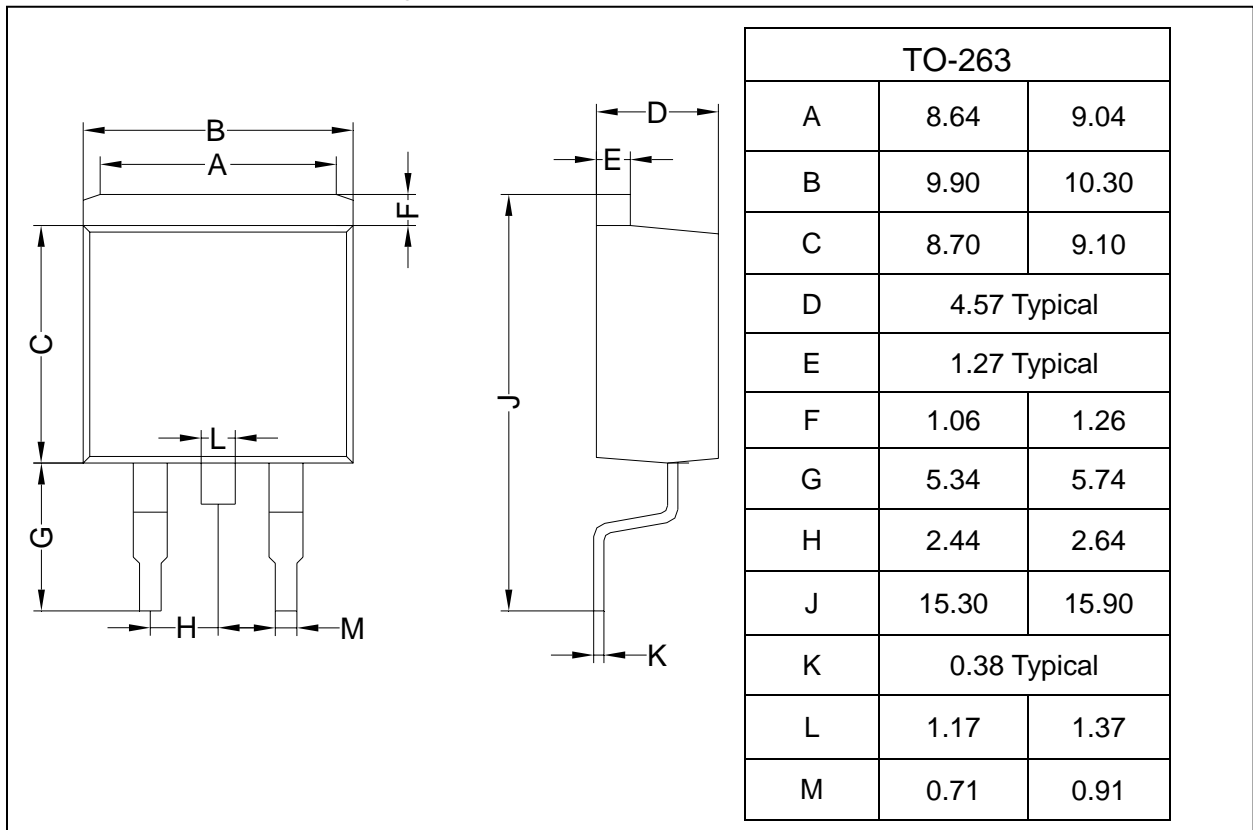




SUPER FAST RECTIFIER

SF1020BC-SF1060BC

SOLDERING FOOTPRINT

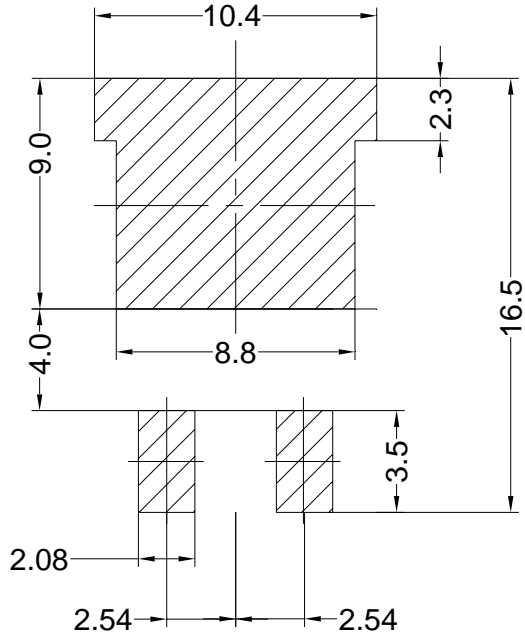

Unit:mm