




Preliminary

- Low Insertion Loss
- 3.8 X 3.8 X 1.0 mm Surface Mount Case
- Single-ended Input and Output
- Complies with Directive 2002/95/EC (RoHS)

**SF1218D****453.5 MHz
SAW Filter****SM3838-6****Absolute Maximum Ratings**

Rating	Value	Units
Maximum Input Power	+27	dBm
Maximum DC Voltage Between any Two Terminals	3	VDC
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	


Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_c	1		453.5		MHz
Source Impedance, Single Ended				50		Ω
Load Impedance, Single Ended				50		Ω
Attenuation Referenced to 0 dB						dB
300 kHz to 350 MHz			30	33		
350 MHz to 445 MHz			25	30		
460 MHz to 462 MHz			6	20		
462 MHz to 467 MHz			25	35		
467 MHz to 2000 MHz			25	33		
Maximum Insertion Loss, 450 to 455 MHz	IL_{MAX}	—		1.7	3.0	dB
Amplitude Variation, 450 to 457 MHz				0.9	1.5	dB
Input Return Loss, 450 to 457 MHz			9	11		dB
Output Return Loss, 450 to 457 MHz			9	11		dB
Operating Temperature			-40		+85	°C


Case Style	SM3838-6 3.8 x 3.8 mm Nominal Footprint	
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	TBD, YWWS	
Standard Reel Quantity	Reel Size 7 Inch	1000 Pieces/Reel
	Reel Size 13 Inch	3000 Pieces/Reel

**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.****Notes:**



1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. The design, manufacturing process, and specifications of this filter are subject to change.
5. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
6. US and international patents may apply.
7. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.

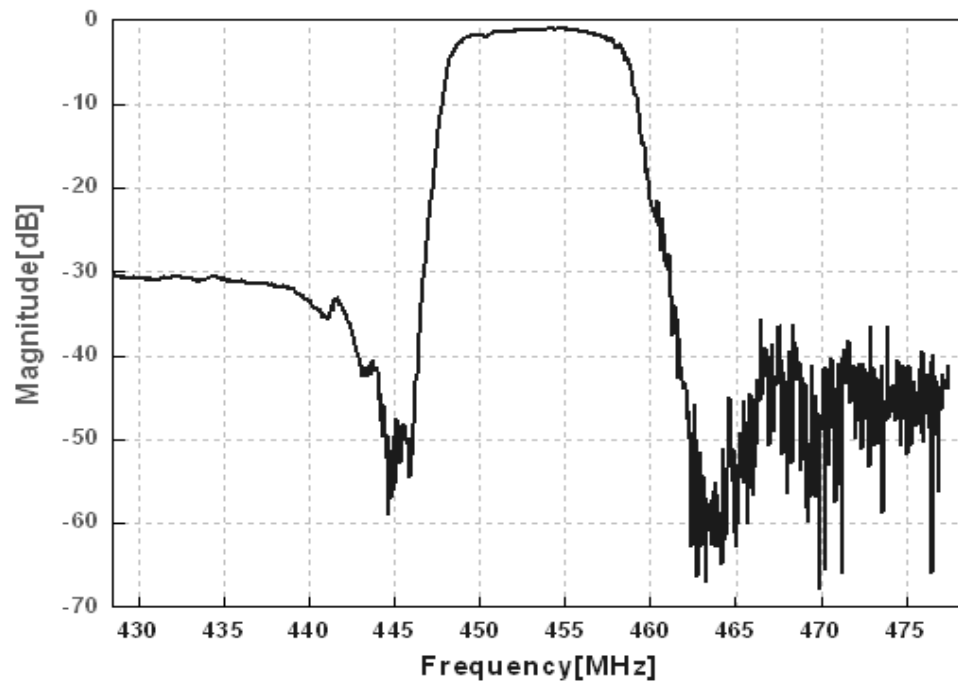



Filter Broadband Response

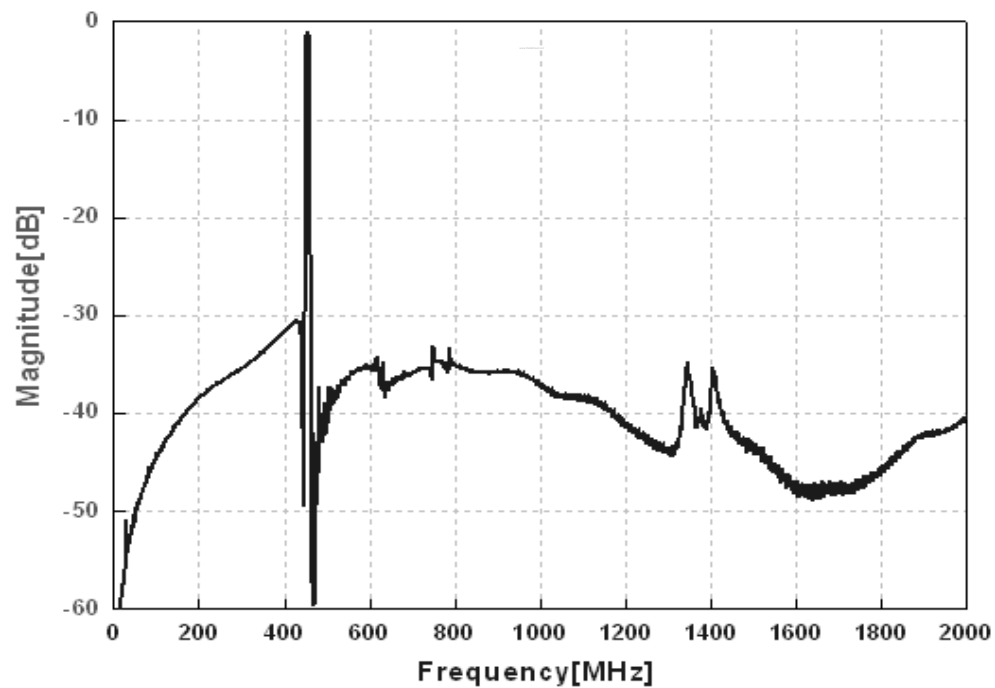

Filter Input Impedance

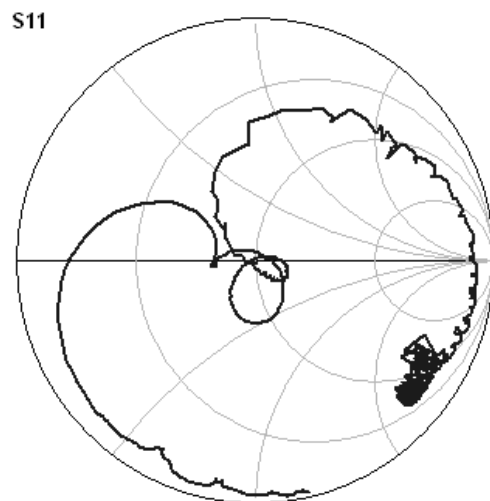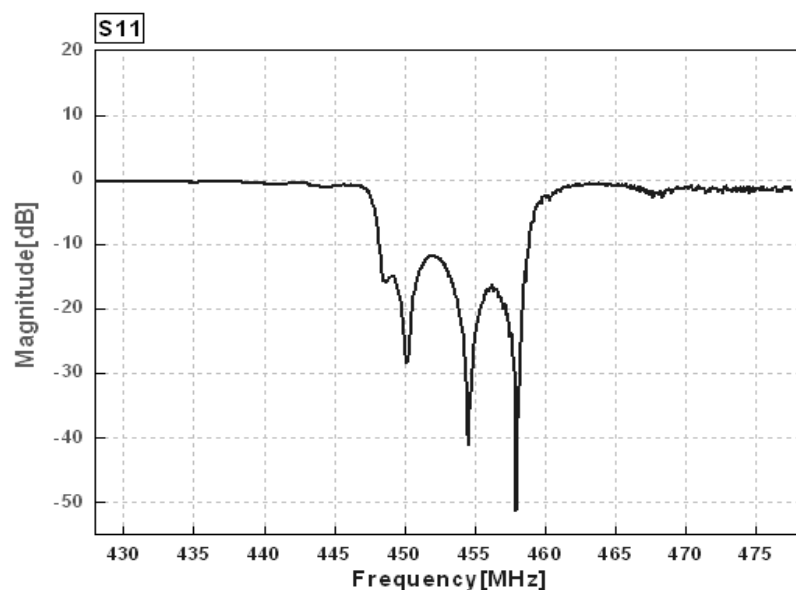


Filter Output Impedance

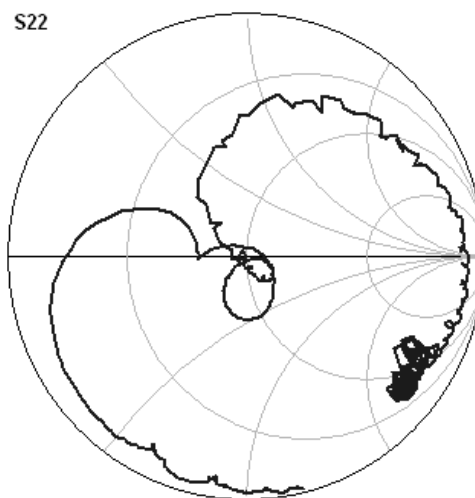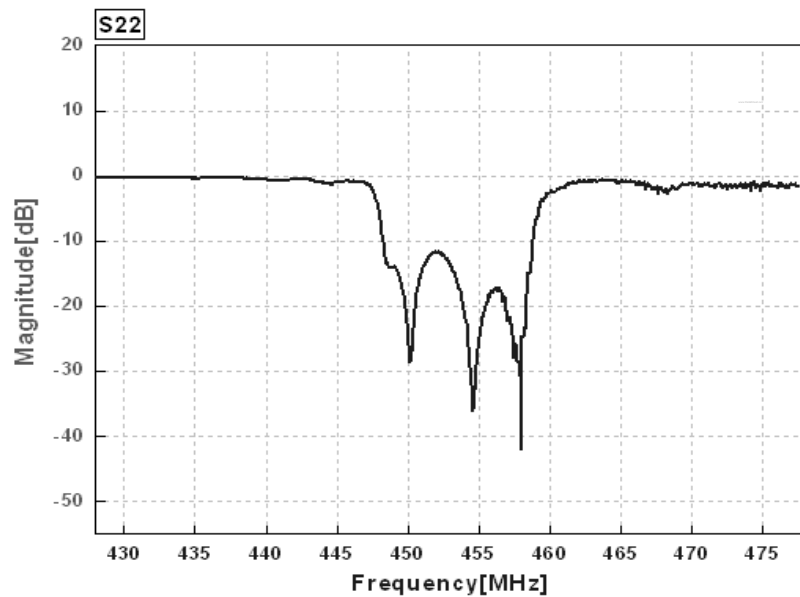

SM3838-6 Case

6-Terminal Ceramic Surface-Mount Case

3.8 X 3.8 mm Nominal Footprint

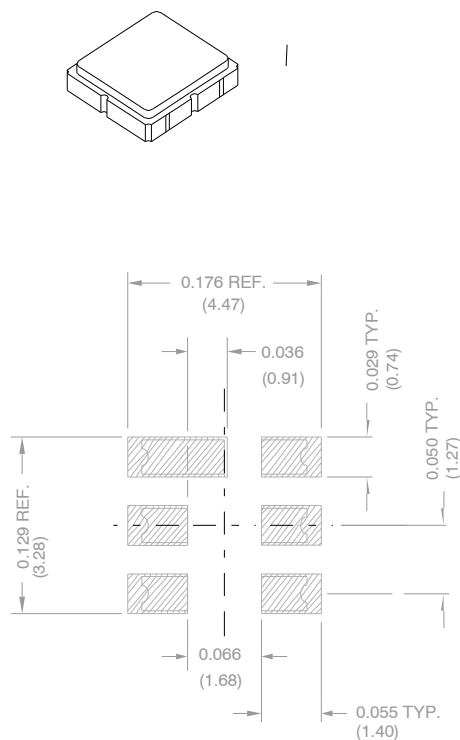

PCB Footprint

Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.60	3.80	4.0	0.14	0.15	0.16
B	3.60	3.80	4.0	0.14	0.15	0.16
C	1.30	1.50	1.70	0.05	0.06	0.067
D	0.95	1.10	1.25	0.037	0.043	0.05
E	2.39	2.54	2.69	0.090	0.10	0.110
G	0.90	1.0	1.10	0.035	0.04	0.043
H	1.90	2.0	2.10	0.75	0.08	0.83
I	0.50	0.6	0.70	0.020	0.024	0.028
J	1.70	1.8	1.90	0.067	0.07	0.075


Electrical Connections

Connection		Terminals
Port 1	Single-ended Input	2
Port 2	Single-ended Output	5
	Ground	All others
Single-ended Operation Only		
Dot indicates Pin 1		



Materials

Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel
Lid Plating	2.0 to 3.0 μm Nickel
Body	Al_2O_3 Ceramic
Pb Free	

TOP VIEW

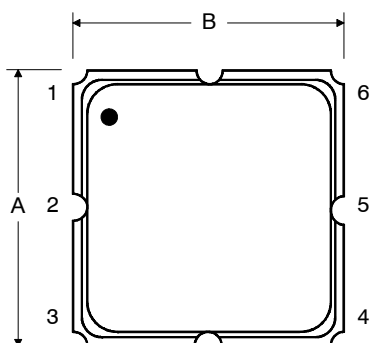

BOTTOM VIEW

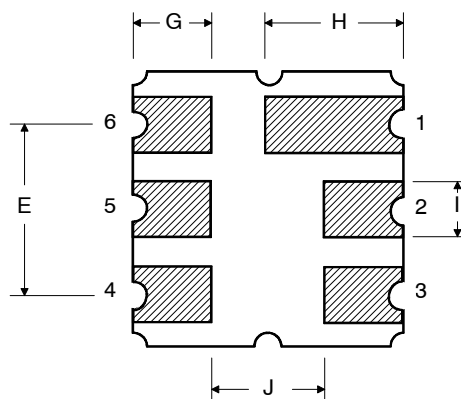

Technical drawing of a circular component, likely a flange or end plate, showing three views: a top view, a side view, and a detail view.

Top View: A large circle with a smaller concentric circle in the center. A horizontal dashed line and a vertical dashed line intersect at the center. A small circle with a crosshair is located at the center of the inner circle. An arrow points from this center to the text "See Detail 'A'".

Side View: Two vertical lines representing the thickness of the component. The total thickness is dimensioned as 12.0. The distance from the centerline to the outer edge is dimensioned as 100 REF. The distance from the centerline to the inner edge is dimensioned as "B" REF.

Detail View: A cross-sectional view of the central hole. It shows a circular hole with a diameter of 13.0. The hole is surrounded by a flange with a thickness of 2.0. The distance from the centerline to the outer edge of the flange is dimensioned as 20.2.

“B”		Quantity Per Reel
Inches	millimeters	
7	178	1000
13	330	3000

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

