



YENYO

SF16A01 THRU SF16A06

Glass Passivated Super Fast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

Mechanical Data

- ★ Case: Molded plastic TO-220AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: Color band denotes cathode
- ★ Mounting position: Any
- ★ Weight: 2.07 grams

**Voltage Range 50 to 600 V
Current 16.0 Ampere**

TO-220AC

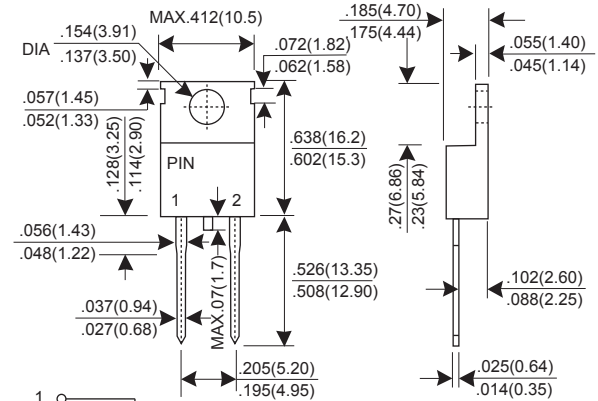

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| PARAMTER | SYMBOL | SF 16A01 | SF 16A02 | SF 16A03 | SF 16A04 | SF 16A05 | SF 16A06 | UNIT |
|---|----------|-------------|----------|----------|----------|----------|----------|------|
| Maximum Recurrent Peak Reverse Voltage | VRRM | 50 | 100 | 200 | 300 | 400 | 600 | V |
| Maximum RMS Voltage | VRMS | 35 | 70 | 140 | 210 | 280 | 420 | V |
| Maximum DC Blocking Voltage | VDC | 50 | 100 | 200 | 300 | 400 | 600 | V |
| Maximum Average Forward Rectified Current Tc=100°C | IF(AV) | 16.0 | | | | | | A |
| Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method) | IFSM | 250 | | | | | | A |
| Maximum Instantaneous Forward Voltage @ 16.0 A | VF | 0.975 | | 1.3 | | 1.7 | | V |
| Maximum DC Reverse Current @Tj=25°C At Rated DC Blocking Voltage @Tj=125°C | IR | 10.0 | | | | | | uA |
| | | 250 | | | | | | uA |
| Maximum Reverse Recovery Time (Note 1) | Trr | 35 | | | | | | nS |
| Typical junction Capacitance (Note 2) | CJ | 65 | | | | | | pF |
| Typical Thermal Resistance (Note 3) | RθJC | 1.2 | | | | | | °CW |
| Operating Junction and Storage Temperature Range | TJ, TSTG | -55 to +150 | | | | | | °C |

NOTES : (1) Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
(3) Thermal Resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES SF16A01 THRU SF16A06

FIG.1 - FORWARD CURRENT DERATING CURVE

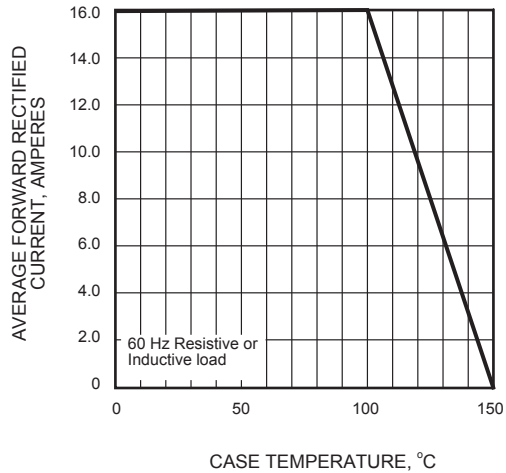


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

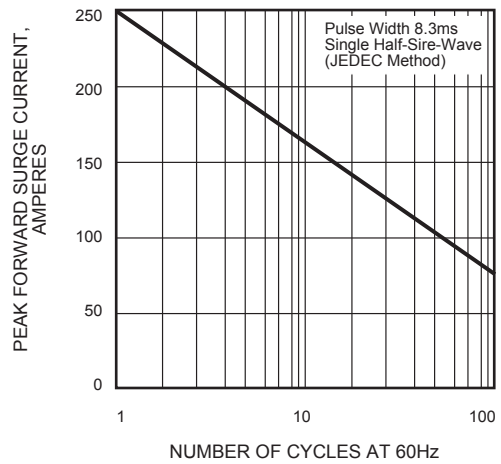


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

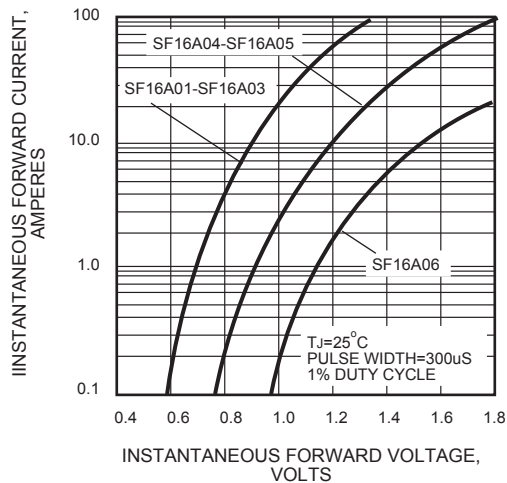


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

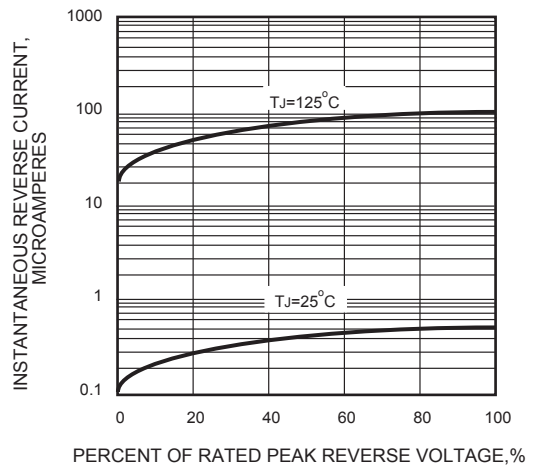


FIG.5 - TYPICAL JUNCTION CAPACITANCE

