



NEC SCHOTT Thermal Cutoffs SEFUSE®
SF/R Series Specification

■ Dimension

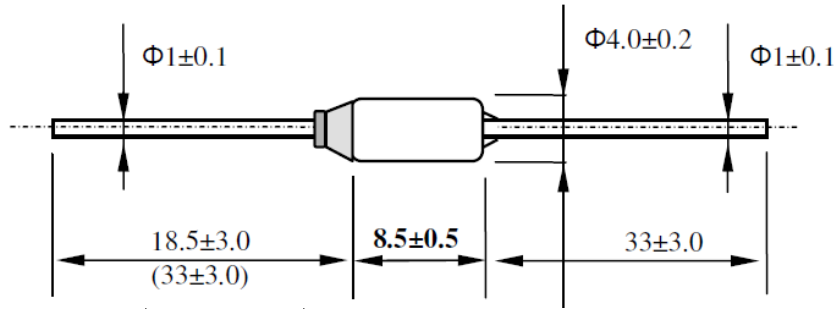

■ Marking

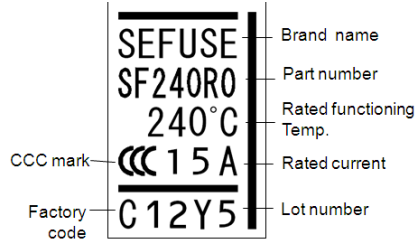

■ Feature

- Higher T_m rating & Quicker responsiveness
- ROHS and REACH compliance products
- **15A marking**

■ Ratings

*1 Part Number	Rated Functioning Temperature T _f (deg.C)	Operating Temperature (deg.C)	*2 T _h (deg.C)	*3 T _m (deg.C)	*4 Electrical Ratings	Safety standards						
						UL / cUL	VDE	CCC Thailand made	PSE Thailand Made (JET1974-32001-***)			
SF70R0	73	70+/-2	58	165	15A/ 250V ac	E71747	677802 -1171 -0015	20130102 05600209				
SF76R0	77	76+0/-4	62						2001			
SF81R0	84	81+3/-1	69						2002			
SF90R0	94	90+/-2	79						2003			
SF94R0	99	94+/-2	84						2004			
SF113R0	113	108+/-2	98						2005			
SF119R0	121	119+/-2	106	2006								
SF129R0	133	129+/-2	118	2007								
SF139R0	142	139+/-2	127	2008								
SF144R0	144	142+/-2	129	2009								
SF150R0	152	150+1/-3	137									
SF167R0	167	164+/-2	153	250								
SF184R0	184	182+/-2	174	375								
SF188R0	192	188+3/-1	177	380								
SF214R0	216	214+1/-3	200									
SF229R0	229	227+/-2										
SF240R0	240	237+/-2										

- *1 Part number indicates thermal cutoff with standard lead length. For long lead length type, type number is changed to SF**R1.
- *2 Holding Temperature is the maximum temperature at which, when applying a rated current to the thermal cutoff, the state of conductivity is not changed during specified time not less 168 hours(1week). The Th rating is only specified by UL.
- *3 Maximum temperature limit is the temperature up to which thermal cutoffs will not change its state of cutoff without impairing.
- *4 The electrical rating according to the various safety standards are shown in the following table.

Rated Voltage	UL / cUL	VDE	CCC	PSE *
AC120V	20A(Res.)			
AC250V	15A(Res.) 16A(Res.)	15A	15A	10A 15A

*SF/R is available for 10A and 15A marking for PSE. Rating 10A marking is applied for Article, and 15A marking is applied for Article 2 of the technical requirement of the METI ordinance J60691.