



3.0Amp. Glass Passivated Super Fast Rectifiers

SF31G thru SF38G

Features

- High current capability
- High reliability
- Low forward voltage drop
- High surge current capability

Mechanical Data

- Case: Molded plastic DO-201AD
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Indicated by cathode band.
- Epoxy : UL94V-0 rate flame retardant
- Weight: 0.041 oz., 1.15 gram

Maximum Ratings and Electrical Characteristics

(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	Type								Units
		SF 31G	SF 32G	SF 33G	SF 34G	SF 35G	SF 36G	SF 37G	SF 38G	
Repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V _R	50	100	150	200	300	400	500	600	V
Maximum instantaneous forward voltage, I _F =3A (Note 1)	V _F	0.95			1.3		1.7			V
Reverse Recovery Time	t _{rr}	35								ns
Average forward rectified current @T _A =95°C	I _{FAV}	3								A
Peak forward surge current @8.3ms single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	125								A
Maximum DC reverse current V _R =V _{RRM} , T _A =25°C (Note 1) V _R =V _{RRM} , T _A =100°C (Note 1)	I _R	5 100								μA μA
Storage temperature	T _{stg}	-55 ~ +150								°C
Operating temperature	T _J	-55 ~ +150								°C

Notes : 1. Pulse test, pulse width=300 μ sec, 2% duty cycle

2 . Reverse recovery test condition: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Characteristic Curves

Fig.1- Forward Current Derating Curve

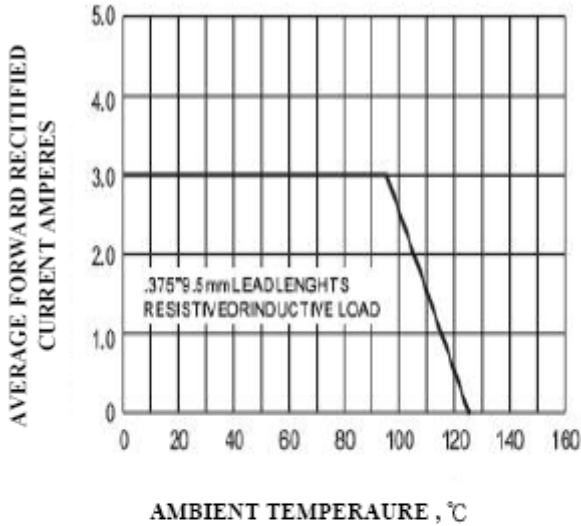


Fig.2- Typical Instantaneous Forward Characteristic

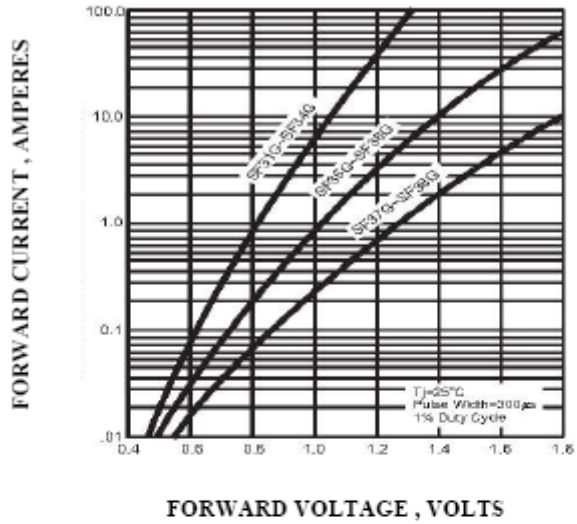


Fig.3- Typical Reverse



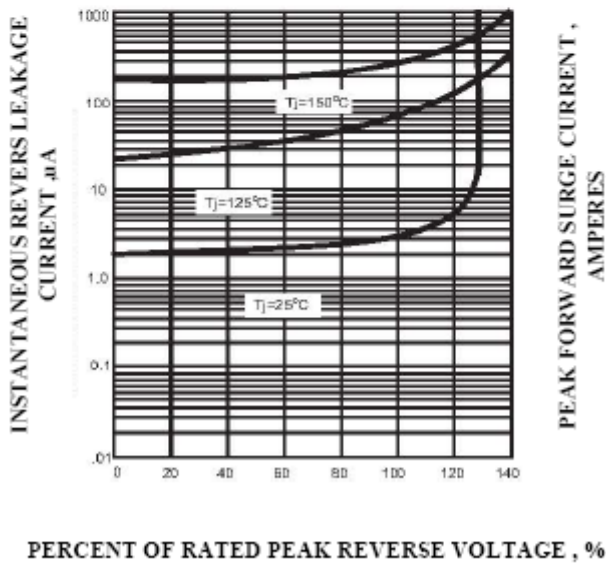


Fig.4- Maximum Non -Repetitive Surge Current

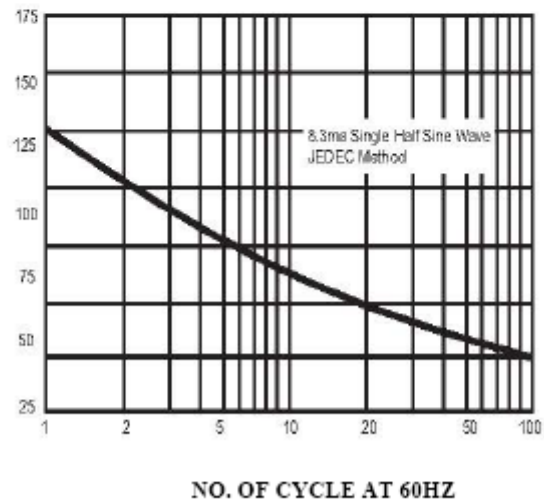

DO-201AD Dimension

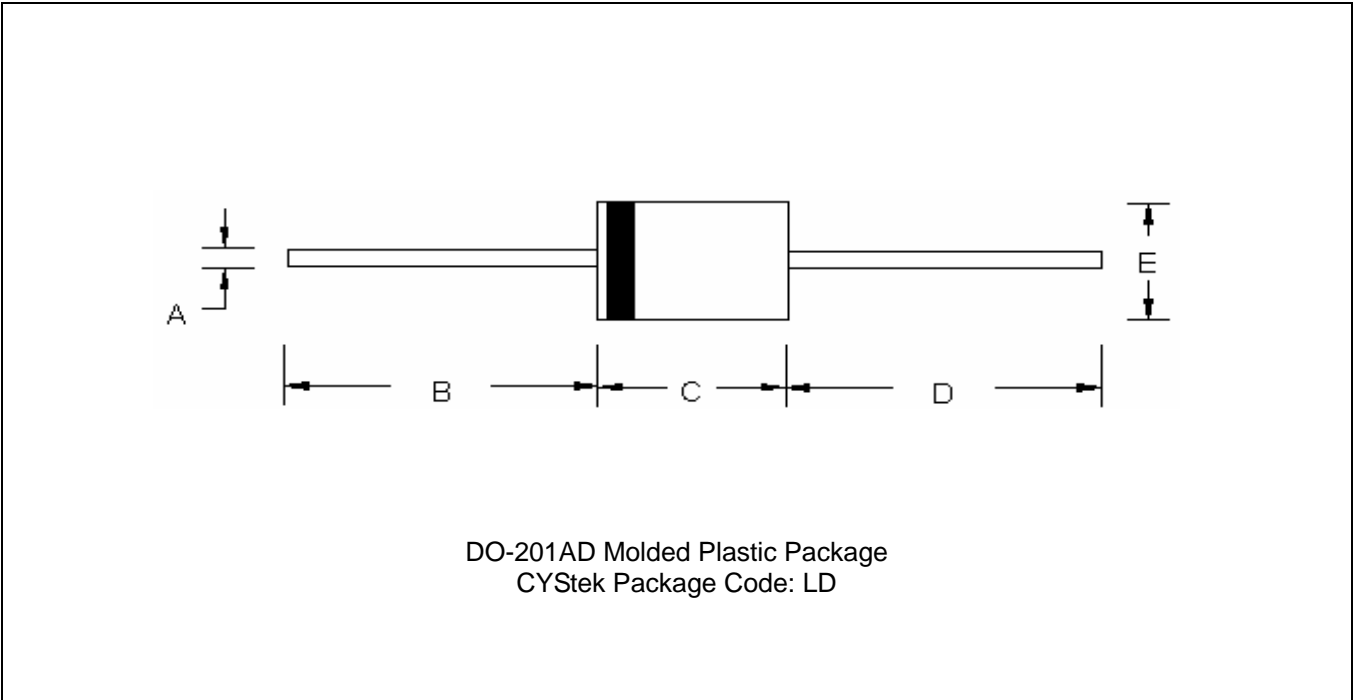

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	φ0.048	φ0.052	φ1.20	φ1.30	D	1.000	-	25.40	-
B	1.000	-	25.40	-	E	φ0.197	φ0.220	φ5.00	φ5.60
C	0.285	0.375	7.20	9.50					

Notes : 1. Controlling dimension : millimeters.
 2. Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3. If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Mold Compound : Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.